97-3 DAYTIME RUNNING LAMPS (DRL)

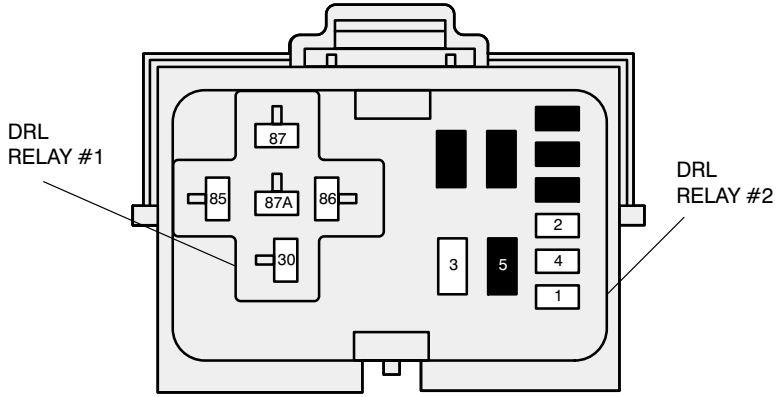

DAYTIME RUNNING LAMPS RELAY BLOCK

PIN	CIRCUIT	CIRCUIT FUNCTION
1	15 (RD/YE)	Power (Hot w/Headlamps on)
2	57 (BK)	Ground
3	295 (LB/PK)	Power (Hot in Run)
4	196 (DB/OG)	Power On/Off to Relay #1 Coil
5	–	NOT USED
30	13 (RD/BK)	Low Beam Headlamps Feed
85	196 (DB/OG)	Power On/Off to Relay #1 Coil
86	57 (BK)	Ground
87	471 (OG/LG)	Power (Hot at All Times) through DRL Resistor
87a	29 (YE/WH)	Feed from Multifunction Switch (Low/FTP)

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C200	13-33
C201	13-34
C205	13-35
C210	85-2
C213	60-7
C246	13-37