C2032b (GY)

14N104

A204
Smart Entry Control
(SEC)/Timer module

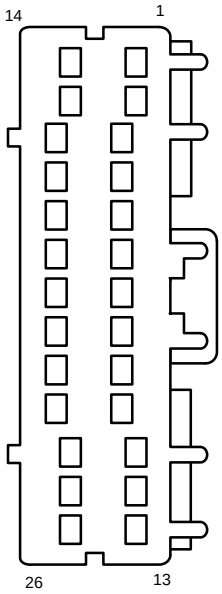

Pin	Circuit	Circuit Function
1	LP92 (WH)	Illuminated entry, Ground
2	LI92 (BN/WH)	Illuminated entry, Ground
3	LI89 (RD/WH)	Liftgate ajar switch, left
4	HF01 (GN/RD)	Rear window defrost switch, input
5	HF07 (GN/BK)	Rear window defrost relay, control
6	SC21 (YE)	Horn relay, control
7	KA41 (PK)	Smart Entry Control (SEC)/Timer module, to Driver seat module
8	SC18 (RD)	Door lock,switch sense
9	–	not used
10	–	not used
11	PH35 (WH/GN)	Door unlock, output
12	SCE2 (BK)	Ground
13	PH43 (GN/YE)	Door lock, output

Pin	Circuit	Circuit Function
14	SCE1 (BK)	Ground
15	LI90 (RD/WH)	Door ajar switch, right front
16	LI40 (RD)	Instrument illumination, Switched, Ground
17	–	not used
18	PD04 (BK/RD)	Power window relay, control
19	SC23 (PK/WH)	Smart Entry Control (SEC)/Timer module, to Lighting control module
20	ST96 (BU)	Anti–theft relay, control
21	SC09 (RD/BK)	Door unlock, switch sense
22	SC22 (GY/RD)	Tail lamp relay, control
23	–	not used
24	PH38 (WH/RD)	Door unlock, output
25	SC11 (LG)	Voltage supplied at all times (overload protected)
26	LI71 (OG)	Ground