Front passenger window/door lock switch

Schematic

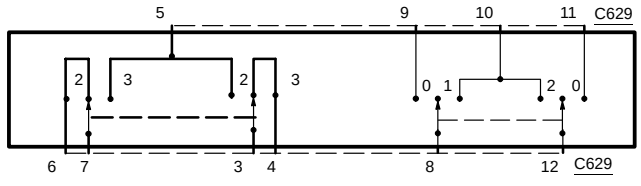

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power windows Up Circuit	10 and 8	Up	Closed circuit
	11 and 12	Up	Closed circuit
Power windows Down Circuit	4 and 12	Down	Closed circuit
	9 and 8	Down	Closed circuit
Master window control switch	9 and 8	Rest	Closed circuit
	11 and 12	Rest	Closed circuit
Lock Switch Circuit	5 and 7	Lock	Closed circuit
		Unlock	Open circuit
	3 and 4	Lock	Closed circuit
		Unlock	Open circuit
Unlock Switch Circuit	5 and 3	Lock	Open circuit
		Unlock	Closed circuit
	6 and 7	Lock	Open circuit
		Unlock	Closed circuit

Terminals
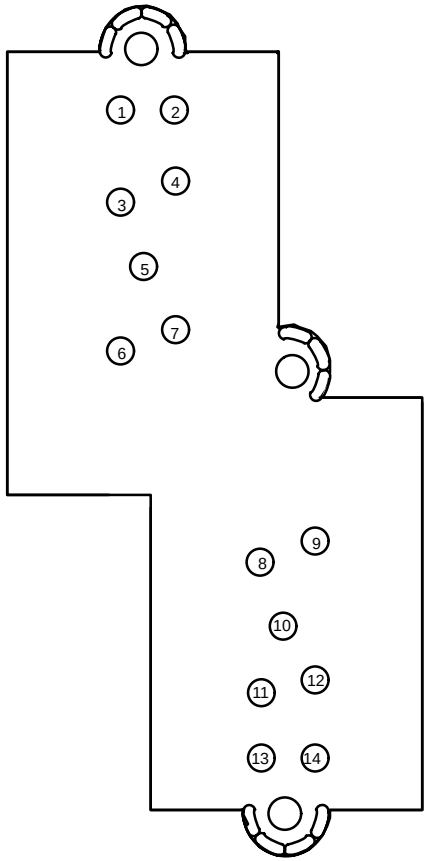
C629