Instrument panel dimming module, Interior lamps

Schematic

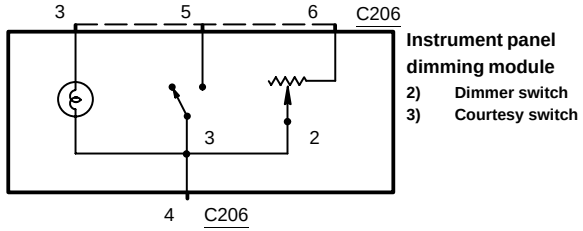

Instrument panel dimming module
2) Dimmer switch
3) Courtesy switch

Terminals

C206



Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Interior lamps Circuit	4 and 5	Interior lamps	Closed circuit
		Off	Open circuit
Illumination dimmer resistor	4 and 6	Rotate knob clockwise	Ohmmeter will show smoothly increasing resistance