Ignition Switch

SCHEMATIC

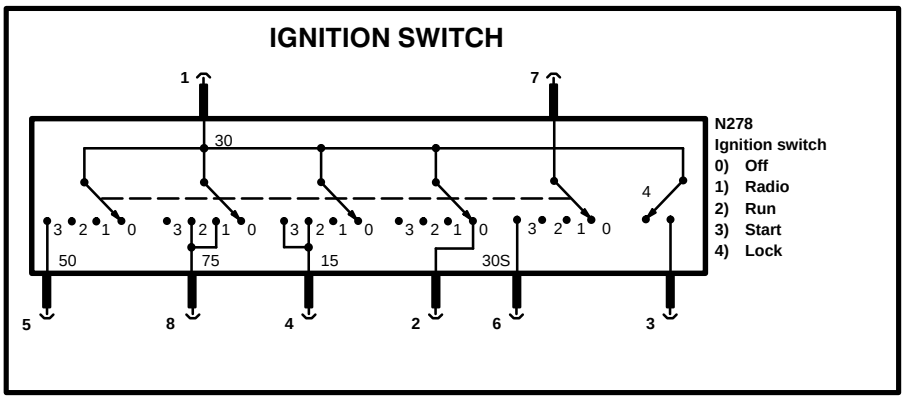

TERMINAL LOCATIONS

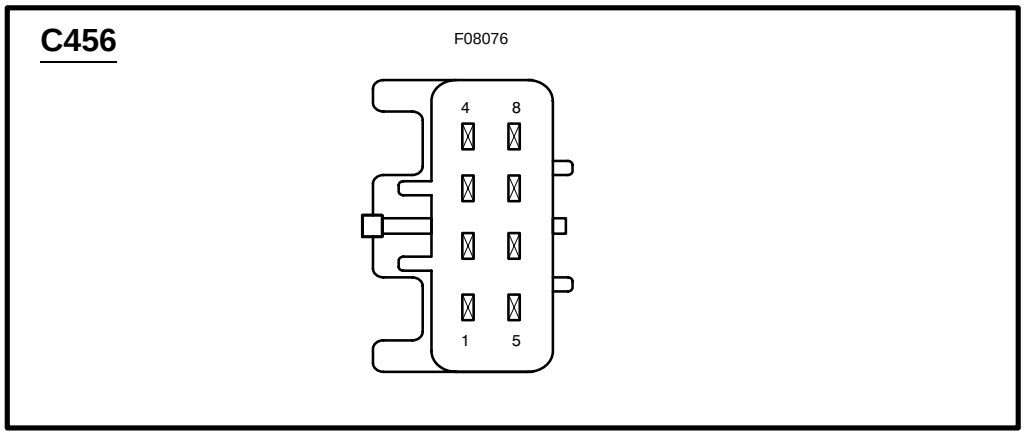

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Key to These Positions	A Good Switch Will Indicate
Starter Relay Circuit	1 and 5	Off	Open Circuit
		Radio	Open Circuit
		Run	Open Circuit
		Start	Closed Circuit
Run Power Circuit	1 and 4	Off	Open Circuit
		Radio	Open Circuit
		Run	Closed Circuit
		Start	Closed Circuit
Acc Power Circuit	1 and 8	Off	Open Circuit
		Radio	Closed Circuit
		Run	Closed Circuit
		Start	Open Circuit
Ignition Key Reminder Circuit	1 and 3	Key In	Closed Circuit
		Key Out	Open Circuit
Start Power Circuit	7 and 6	Off	Open Circuit
		Radio	Open Circuit
		Run	Open Circuit
		Start	Closed Circuit