Headlamp Switch, Autolamp Section

Schematic

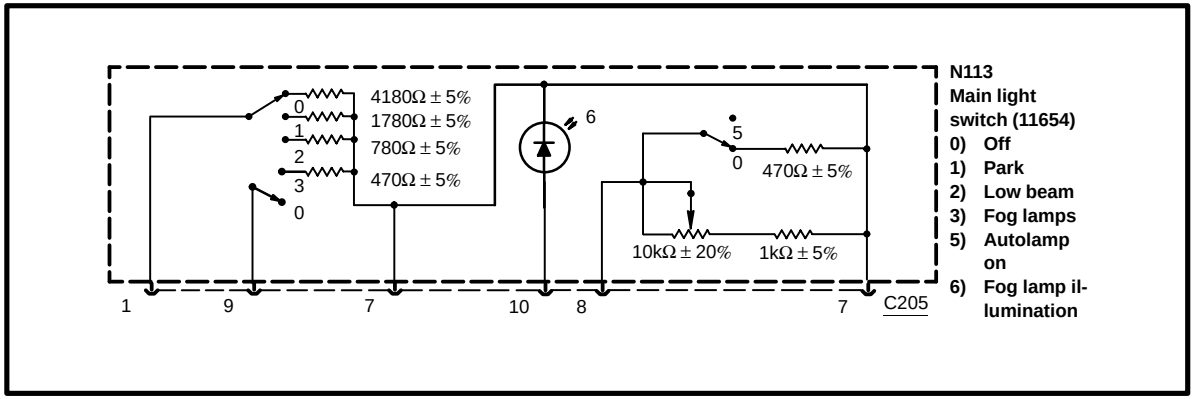

Terminals

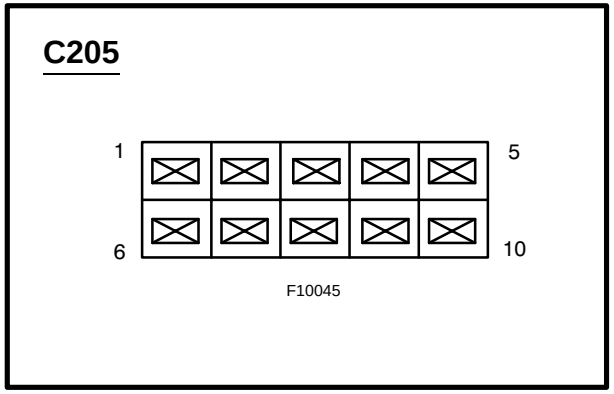

Component testing procedure

Circuit to test	Connect ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Park lamps	1 and 7	Park lamps	1780Ω
Low beam	1 and 7	Low beam	780Ω
Fog lamps	9 and 7	On	470Ω
		Off	8
Autolamp Circuit	7 and 8	Off	320–450Ω
		On	1k–11kΩ