Master window/door lock/unlock switch (continued)

Schematic

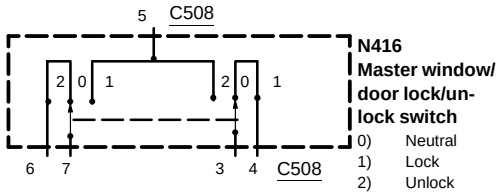

Terminals

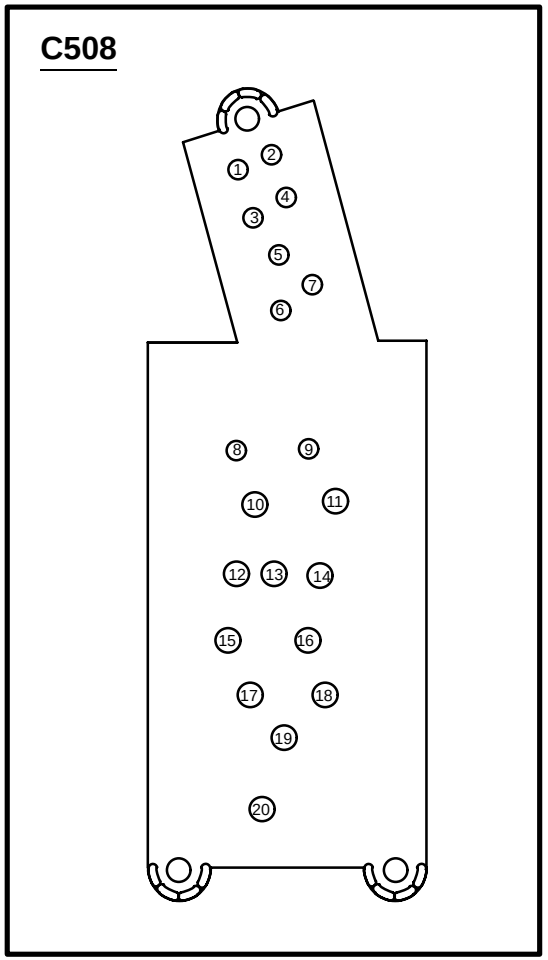

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	5 and 7	Lock	Closed circuit
		Unlock	Open circuit
	3 and 4	Lock	Closed circuit
		Unlock	Open circuit
Unlock Switch Circuit	5 and 3	Lock	Open circuit
		Unlock	Closed circuit
	6 and 7	Lock	Open circuit
		Unlock	Closed circuit