Driver front door lock switch

Schematic

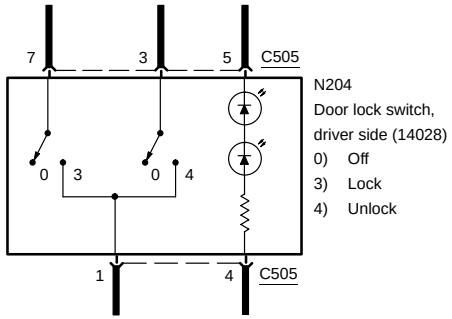

N204
Door lock switch, driver side (14028)
0) Off
3) Lock
4) Unlock

Terminals

C505



F08167

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	7 and 4	Lock	Closed circuit
		Neutral	Open circuit
Unlock Switch Circuit	3 and 4	Unlock	Closed circuit
		Neutral	Open circuit