C315

14B720



F02211

14716



F02042

C316

14A005

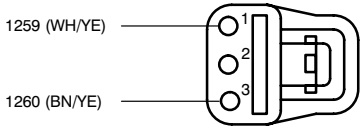

F03145

14716



F03062

C318

19A456

A219
Cellular phone
handset



F10072

Pin	Circuit	Circuit Function
1	1272 (YE/LG)	Cellular phone module, with telephone provisions
2	714 (GY)	Microphone, audio
3	712 (DG)	C–Data
4	713 (TN)	Microphone, Ground
5	711 (YE)	T–Data
6	717 (OG)	Handset, audio ground – not used
7	716 (RD)	R–Data
8	710 (LB)	External battery +
9	718 (BK)	Handset, logic ground
10	1271 (BK/LG)	Cellular phone module, with telephone provisions

C319

14A318

R42
Cigar lighter, front
(15055)



F03193

Pin	Circuit	Circuit Function
1	40 (LB/WH)	Voltage supplied at all times (overload protected)
2	19 (LB/RD)	Illumination
3	57 (BK)	Ground