Heated seats, Rear

Schematic

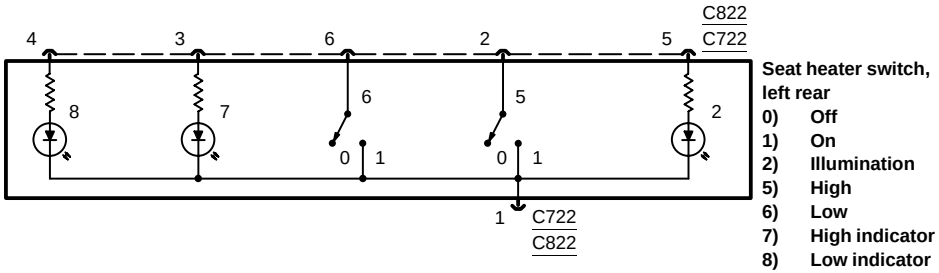

Seat heater switch, left rear

0) Off
1) On
2) Illumination
5) High
6) Low
7) High indicator
8) Low indicator

Terminals

C722
C822



F06301

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
heater Circuit	2 and 1	High	Closed circuit
		Low	Open circuit
	6 and 1	High	Open circuit
		Low	Closed circuit