# Multifunction switch

## Schematic

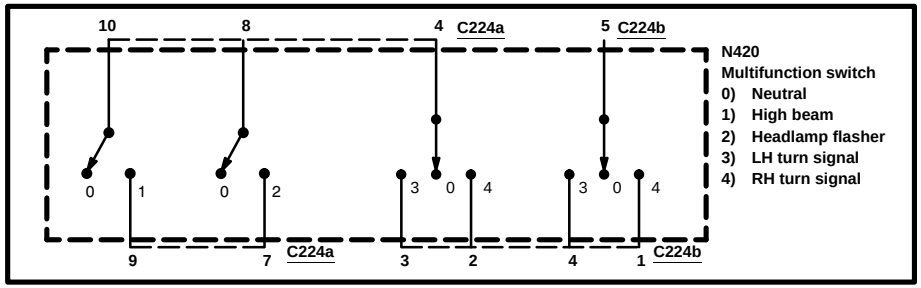


## Component testing procedure

| Circuit to test | Connect self–powered test light or ohmmeter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| **High beam** | 10, C224a and 9, C224a | Neutral | Open circuit |
| | | High beam | Closed circuit |
| **Headlamp flasher** | 8, C224a and 7, C224a | Neutral | Open circuit |
| | | Headlamp flasher | Closed circuit |
| **RH turn signal** | 4, C224a and 2, C224b | Neutral | Open circuit |
| | 5, C224b and 1, C224b | RH turn signal | Closed circuit |
| **LH turn signal** | 4, C224a and 3, C224b | Neutral | Open circuit |
| | 5, C224b and 4, C224b | LH turn signal | Closed circuit |

## Terminal locations
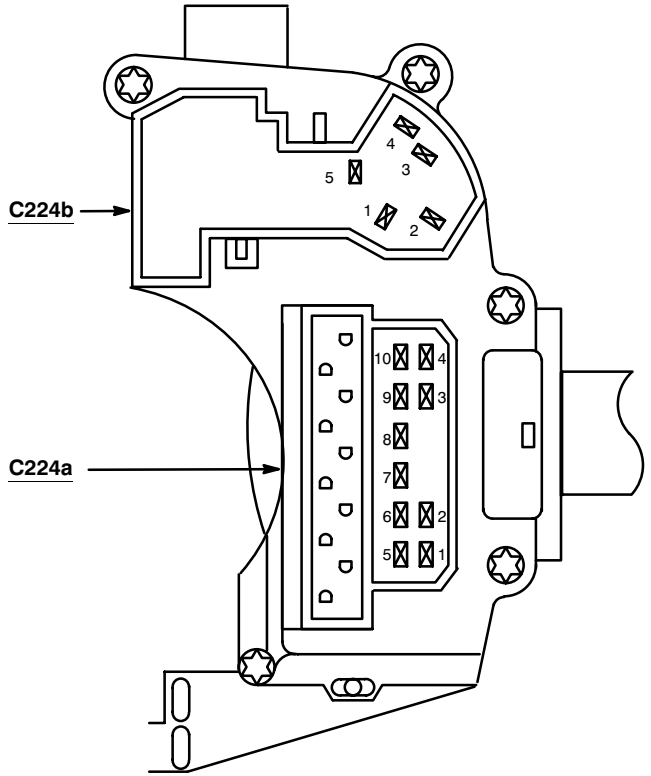
**C224a, C224b**