Door lock switch, passenger side (14028)

Schematic

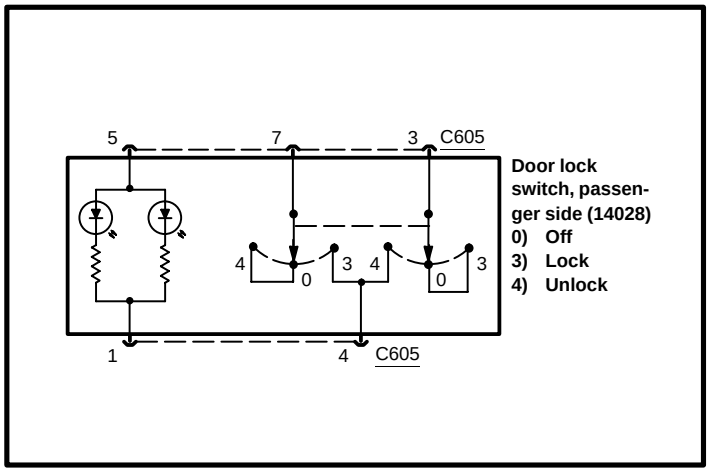

Terminals

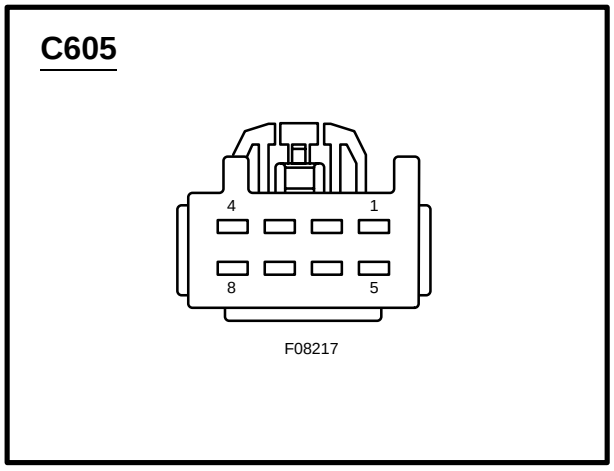

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	3 and 4	Unlock	Closed circuit
		Rest	Open circuit
Unlock Switch Circuit	4 and 7	Lock	Closed circuit
		Rest	Open circuit