Ignition switch -2

Schematic

Ignition switch

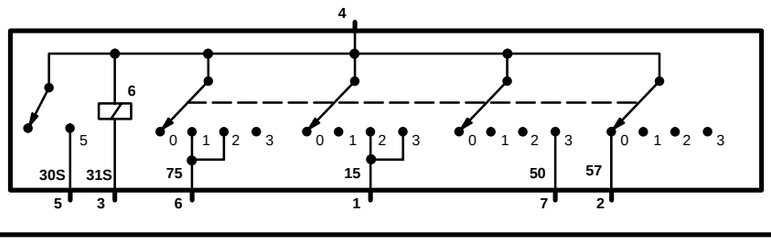

N278
Ignition switch
0) Off
1) Acc
2) Run
3) Start
5) Key in ignition switch
6) Key removal inhibit solenoid

Terminal locations

C456

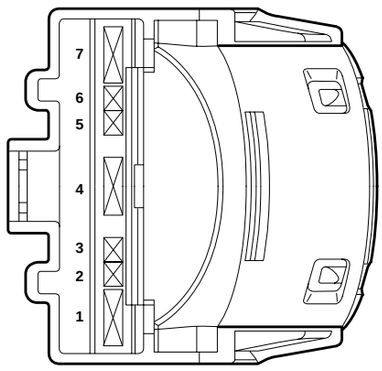

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Starter relay circuit	4 and 7	Off	Open circuit
		Acc	Open circuit
		Run	Open circuit
		Start	Closed circuit
Run power circuit	4 and 1	Off	Open circuit
		Acc	Open circuit
		Run	Closed circuit
		Start	Closed circuit
Acc power circuit	4 and 6	Off	Open circuit
		Acc	Closed circuit
		Run	Open circuit
		Start	Open circuit
Key reminder circuit	4 and 5	Key In	Closed circuit
		Key Out	Open circuit
Key removal inhibit circuit	4 and 3		65–75 Ω