Power window switch, RH side front – Expedition

Schematic

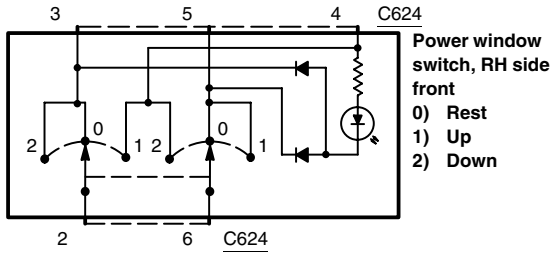

Power window switch, RH side front
0) Rest
1) Up
2) Down

Terminals

C624



F08207

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Right front window circuit	2 and 3	Up	Open circuit
		Rest	Closed circuit
		Down	
	2 and 4	Up	Closed circuit
		Rest	Open circuit
		Down	
	6 and 4	Up	Open circuit
		Rest	
		Down	Closed circuit
	6 and 5	Up	Closed circuit
		Rest	
		Down	Open circuit