C290a

19B107

A220
Audio unit (18808)

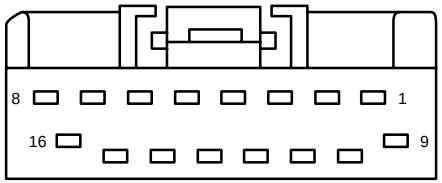

F16071

Pin	Circuit	Circuit function
1	19 (LB/RD)	Instrument illumination, feed
2	57 (BK)	Ground
3	306 (TN/LB)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	956 (OG/LG)	Voltage supplied at all times (overload protected)
10	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
11	57 (BK)	Ground
12	801 (TN/YE)	Speaker, left rear (18808) +
13	800 (GY/LB)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	Ground

C290b

19B107

A220
Audio unit (18808)



F08187

Pin	Circuit	Circuit function
1	172 (LB/RD)	Radio (18806) – Subwoofer, Low –
2	169 (LG/BK)	Radio (18806) – Subwoofer, Low +
3	1205 (BK)	Shield
4	174 (GY/BK)	Radio (18806) – Subwoofer, Low, mute
5	–	not used
6	–	not used
7	–	not used
8	–	not used

C293

14401

M204
Front blower motor
resistor assembly



F04249

Pin	Circuit	Circuit function
1	752 (YE/RD)	Blower switch speed control, to resistor
2	57 (BK)	Ground
3	261 (OG/BK)	Blower motor, to switch – High
4	754 (LG/WH)	Blower switch speed control, to resistor