149-1 COMPONENT TESTING: INTRODUCTION/MAIN LIGHT SWITCH

INTRODUCTION

Component testing procedures are provided to determine whether a component is good or bad.

Testing information for each component includes a schematic with component terminal locations and step-by-step test procedures. Component terminals are identified:

1. by the circuit number of the wires that connect to that terminal;
2. by the wire insulation color; and
3. by letters or numbers that may be marked on the component.

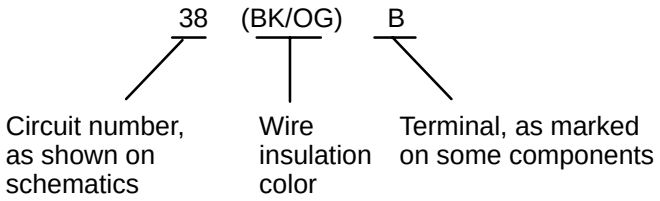

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Lamps or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Headlamp Circuit	8 and 9	Off Park Head	Open Circuit Open Circuit Closed Circuit
Park Lamp Circuit	11 and 12	Off Park Head	Open Circuit Closed Circuit Closed Circuit
Interior Lamp Circuit	2 and 4	Knob rotated fully counterclockwise (In Detent) Knob rotated fully clockwise (Out of Detent)	Closed Circuit Open Circuit
Panel Lamp Dimmer Circuit	6 and 1	Knob rotated left from full right position	Ohmmeter will show smoothly decreasing resistance