C290b

14401

A11
Radio (18806)

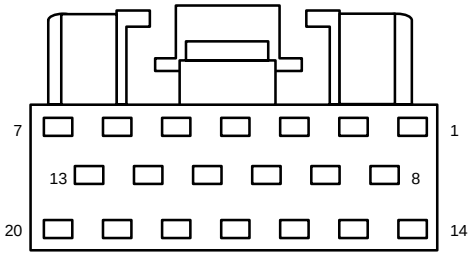

F20023

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	1068 (LG/BK)	Audio System ON (ASYSON)
6	832 (LB/PK)	Audio corporate protocol A
7	833 (TN)	Audio corporate protocol B
8	–	not used
9	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	595 (LB/RD)	Steering wheel radio switch, Radio (18806)
15	–	not used
16	48	Shield
17	690 (GY)	Radio (18806), to CD changer, Right +
18	799 (OG/BK)	Radio (18806), to CD changer, Right –
19	856 (VT)	Radio (18806), to CD changer, Left +
20	798 (LG/RD)	Radio (18806), to CD changer, Left –

C290c

14401

A11
Radio (18806)



F08231

Pin	Circuit	Circuit function
1	168 (RD/BK)	radio to sub–woofer high audio –
2	167 (BN/OG)	radio to sub–woofer high audio +
3	48	Shield
4	173 (DG/VT)	radio to sub–woofer high audio, mute
5	–	not used
6	–	not used
7	–	not used
8	–	not used

C303

14A504

A226
Passenger safety belt retractor pretensioner



F02042

Pin	Circuit	Circuit function
1	1081 (YE/RD)	Passenger safety belt retractor pretensioner, feed
2	1082 (YE/BK)	Passenger safety belt retractor pretensioner, return