Power window switch, RH side front

Schematic

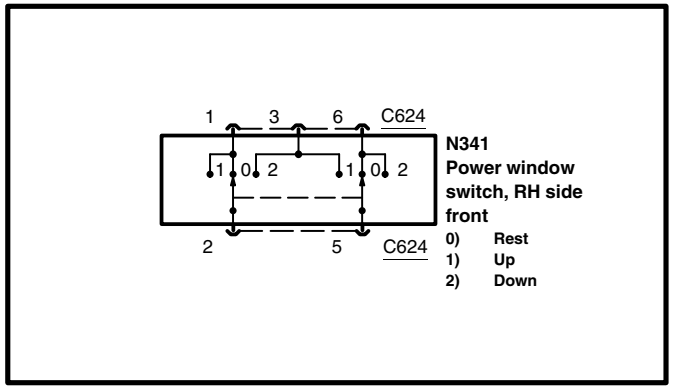

Terminals

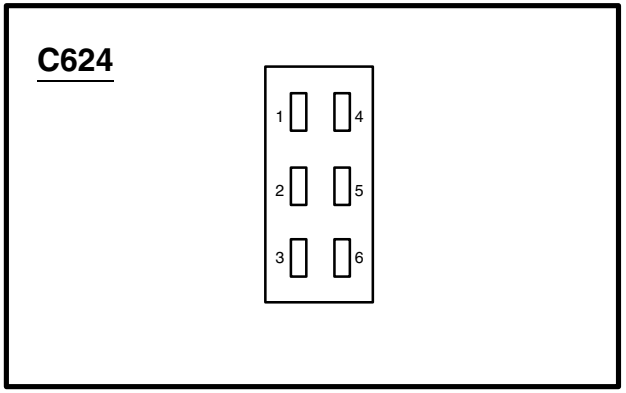

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Window regulator circuit, Up	3 and 5	Up	Closed circuit
	1 and 2	Up	Closed circuit
Window regulator circuit, Down	2 and 3	Down	Closed circuit
	5 and 6	Down	Closed circuit
Master window control switch	1 and 2	Rest	Closed circuit
	5 and 6	Rest	Closed circuit