C292 (WH)

14N104

N49
Hazard flasher switch

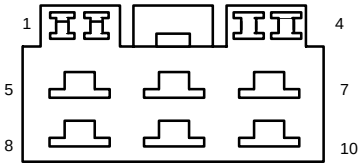

F10047

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	IJ93 (PK/BK)	Illumination, Ground
4	IJ03 (PK)	Illumination, feed
5	LB01 (PK/BU)	Voltage supplied in Start and Run (overload protected)
6	LB03 (OG)	Hazard flasher switch, switch sense
7	LB02 (GN/YE)	Voltage supplied at all times (overload protected)
8	LB17 (RD/WH)	Turn lamps, Right, switched power
9	LB04 (VT)	Turn Signal and Hazard Lamps, switched power
10	LB18 (RD/GN)	Turn lamps, Left, switched power

C293 (BK)

14A664

N54
Horn switch



F02157

Pin	Circuit	Circuit function
1	(LB/BK)	Horn relay, control
2	(WH)	Ground