-107

C1007

14K733

K4
Fuel pump relay

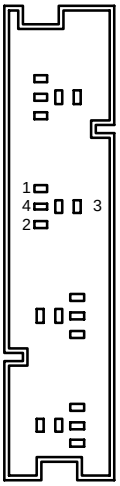

F20012

Pin	Circuit	Circuit Function
1	15-RH6 (GN/RD)	Voltage, ignition switch in Start or Run (not overload protected)
2	91-RH5 (BK/BU)	Ground
3	30-RH6 (RD)	Voltage supplied at all times (not overload protected)
4	–	not used
5	15-RP3 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected)

C1008

14K733

K13
Power hold relay

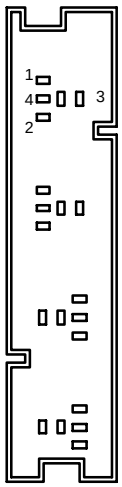

F20012

Pin	Circuit	Circuit Function
1	15-RH9 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected)
2	91-DA4 (BK/GN)	Ground
3	30-FA12 (RD/BU)	Battery voltage, hot at all times (not overload protected)
4	–	not used
5	15S-FA6 (GN/YE)	Battery voltage, hot in Start and Run only (not overload protected), switched
	15S-FA7 (GN/BU)	Battery voltage, hot in Start and Run only (not overload protected), switched