149-7 COMPONENT TESTING: EXTERIOR REAR VIEW MIRROR SWITCH

TERMINALS

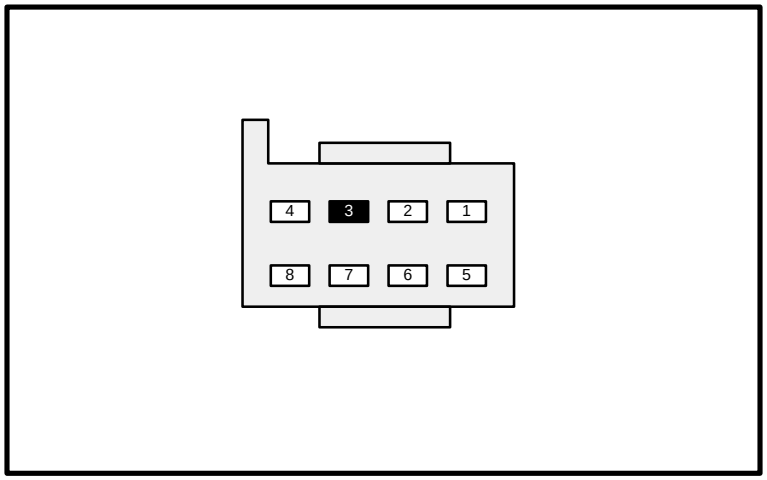

SCHEMATIC

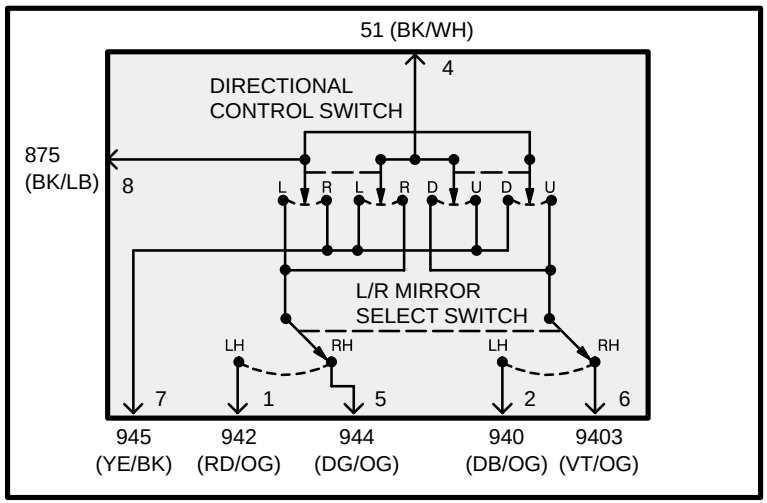

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Lamp or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Left Mirror Up Circuit	4 and 7 3 and 2	Select Switch to Left and Control Switch to Up	Closed Circuit Closed Circuit
Left Mirror Down Circuit	4 and 2 8 and 7	Select Switch to Left and Control Switch to Down	Closed Circuit Closed Circuit
Left Mirror Left Circuit	4 and 7 8 and 1	Select Switch to Left and Control Switch to Left	Closed Circuit Closed Circuit
Left Mirror Right Circuit	4 and 1 5 and 7	Select Switch to Left and Control Switch to Right	Closed Circuit Closed Circuit
Right Mirror Up Circuit	4 and 7 3 and 6	Select Switch to Right and Control Switch to Up	Closed Circuit Closed Circuit
Right Mirror Down Circuit	4 and 6 5 and 7	Select Switch to Right and Control Switch to Down	Closed Circuit Closed Circuit
Right Mirror Left Circuit	4 and 7 8 and 5	Select Switch to Right and Control Switch to Left	Closed Circuit Closed Circuit
Right Mirror Right Circuit	4 and 5 8 and 7	Select Switch to Right and Control Switch to Right	Closed Circuit Closed Circuit