Power seat switch, right – Expedition

Schematic

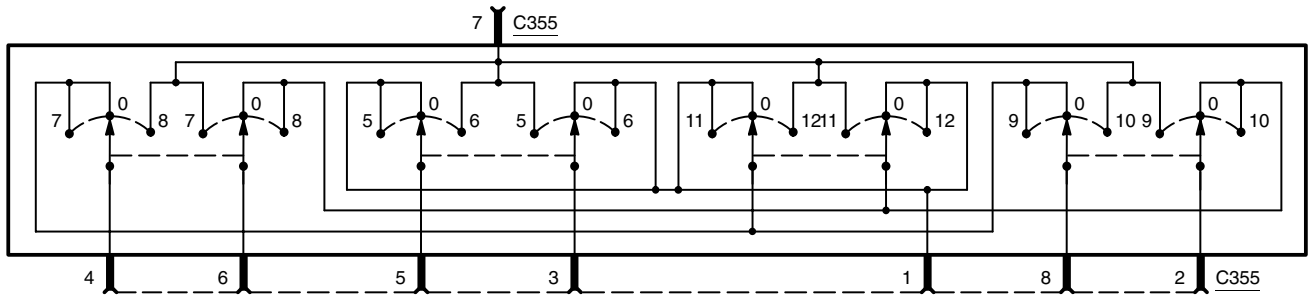

Power seat switch, right
0) Rest
5) Seat forward
6) Seat rearward
7) Front up
8) Front down
9) Rear up
10) Rear down
11) Seat up
12) Seat down

Terminals

C355



F08273

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Forward/rearward circuit	7 and 3	Forward	Closed circuit
		Rest	Open circuit
		Rearward	
	7 and 5	Forward	Open circuit
		Rest	
		Rearward	Closed circuit
	1 and 3	Forward	Open circuit
		Rest	Closed circuit
		Rearward	
	1 and 5	Forward	Closed circuit
		Rest	
		Rearward	Open circuit