Multifunction Switch, Wiper/Washer Portion

Schematic

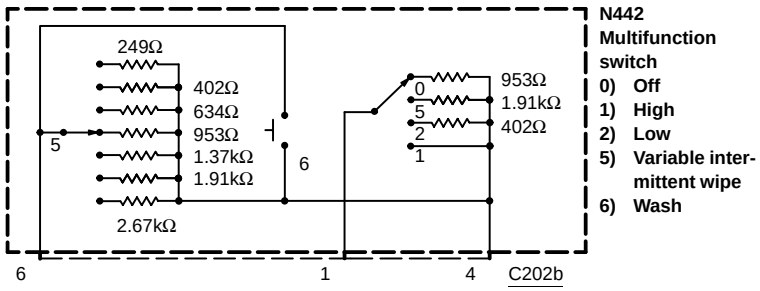

N442
Multifunction switch
0) Off
1) High
2) Low
5) Variable intermittent wipe
6) Wash

Terminals

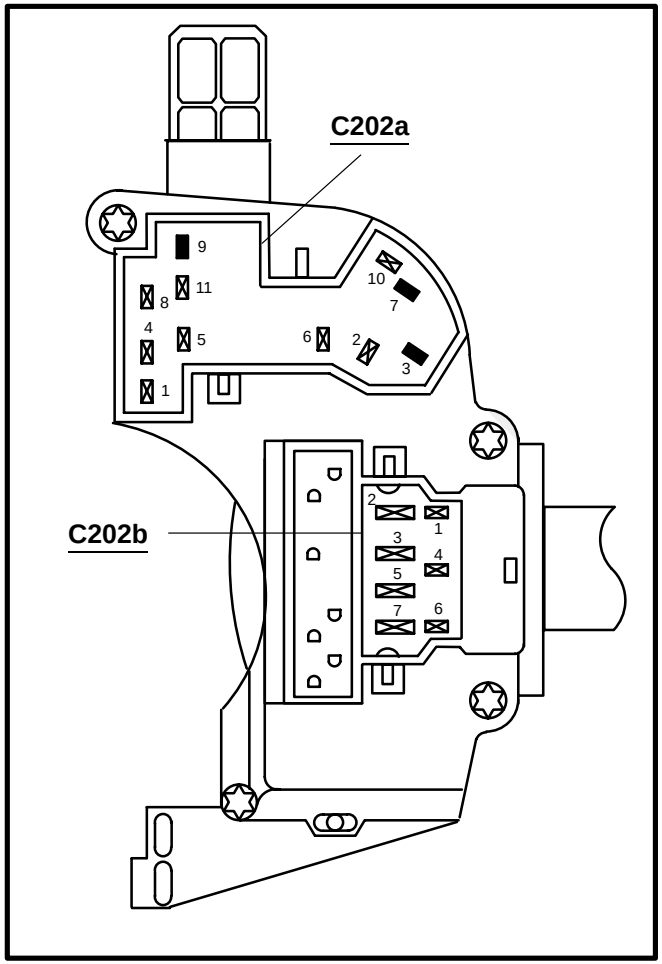

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Washer switch circuit	4 and 6	Washer switch depressed	Closed circuit
		Washer switch normal	Open circuit
Wiper switch circuit	1 and 4	Off	953Ω
		Intermittent	1.91kΩ
		Low	402Ω
		High	Closed circuit
Intermittent wiper circuit	4 and 6	#1 Detent	2.67kΩ
		#2 Detent	1.91kΩ
		#3 Detent	1.37kΩ
		#4 Detent	953Ω
		#5 Detent	634Ω
		#6 Detent	402Ω
		#7 Detent	249Ω