Adjustable pedal switch – with memory

Schematic

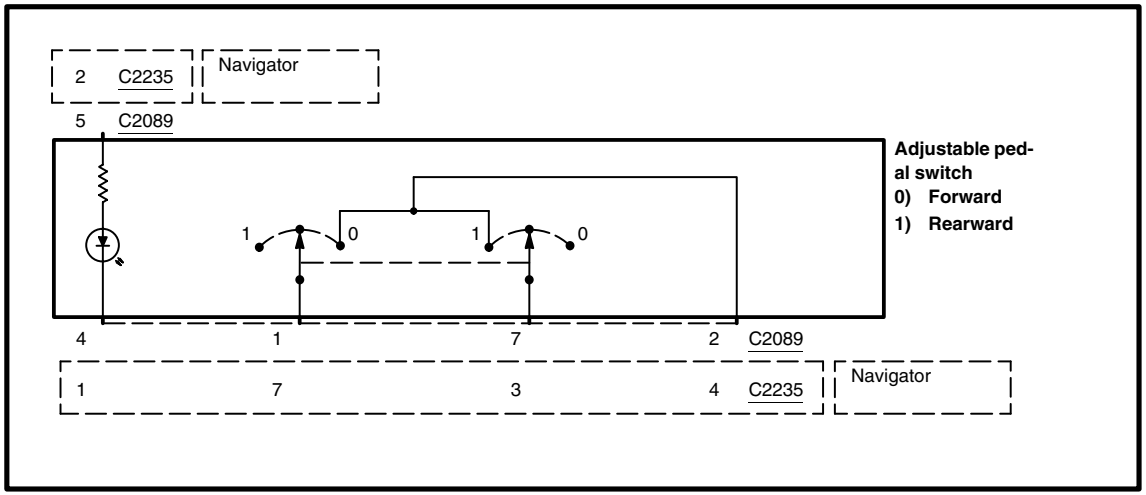

Terminals

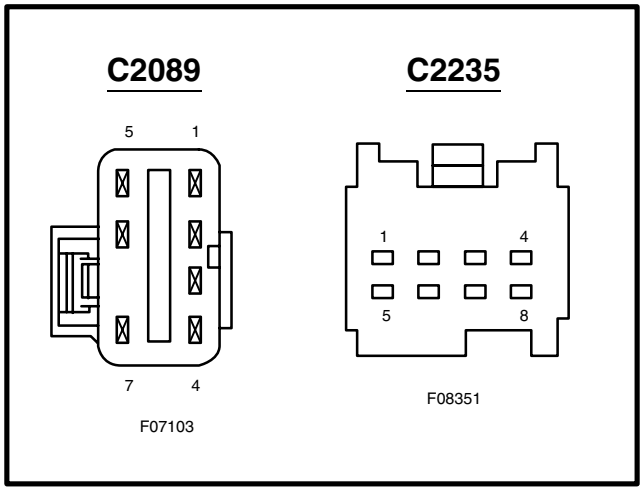

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Forward/rearward circuit	1 and 2, C2089 7 and 4, C2235	Forward	Closed circuit
		Rest	Open circuit
		Rearward	
	7 and 2, C2089 3 and 4, C2235	Forward	Open circuit
		Rest	
		Rearward	Closed circuit