# Door lock switch, Driver side

## Schematic

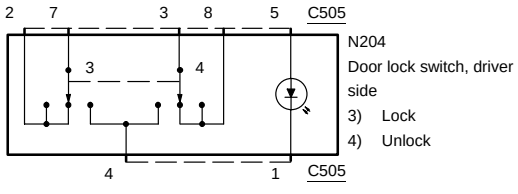


## Terminals




## Component testing procedure

| Circuit to test | Connect self–powered test light or ohm-meter to terminals | Move switch to these positions | A good switch will indi-cate |
|---|---|---|---|
| **Door lock switch** | 7 and 4 | Lock | Closed circuit |
| | | Unlock | Open circuit |
| | | Neutral | Open circuit |
| | 3 and 4 | Lock | Open circuit |
| | | Unlock | Closed circuit |
| | | Neutral | Open circuit |