149-1 COMPONENT TESTING: INTRODUCTION/IGNITION SWITCH

INTRODUCTION

Component testing procedures are provided to determine whether a component is good or bad.

Testing information for each component includes a schematic with component terminal locations and step-by-step test procedures. Component terminals are identified by:

1. the circuit number of the wires that connect to that terminal,
2. the wire insulation color, and
3. letters or numbers that may be marked on the component.

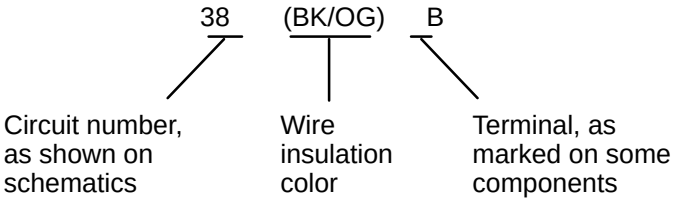

The component connector MUST BE REMOVED before testing. To test a single circuit within the component, select that circuit under the column TO TEST. If you wish to test the complete component, perform all tests.

Connect the tester to the terminals shown in the second column and operate the component as shown in the third column.

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Lamp or Ohmmeter to Terminals	Move Key to These Positions	A Good Switch Will Indicate
Starter Relay Circuit	B1 and ST	Lock Acc Run Start	Open Open Open Closed
"Acc" Circuit	B2 and Acc	Lock Acc Run Start	Open Closed Closed Open
IG1 Circuit	B2 and IG1	Lock Acc Run Start	Open Open Closed Closed
IG2 Circuit	B1 and IG2	Lock Acc Run Start	Open Open Closed Open
Internal Connections	B1 and B2	Lock Acc Run Start	Closed Closed Closed Closed

SCHEMATIC

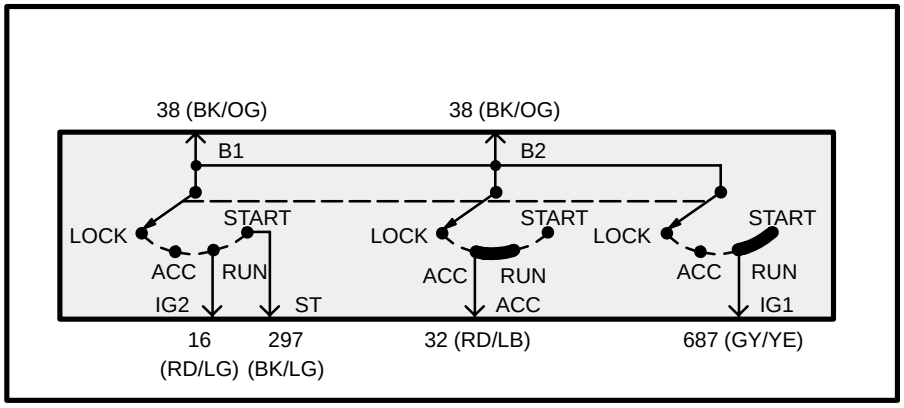
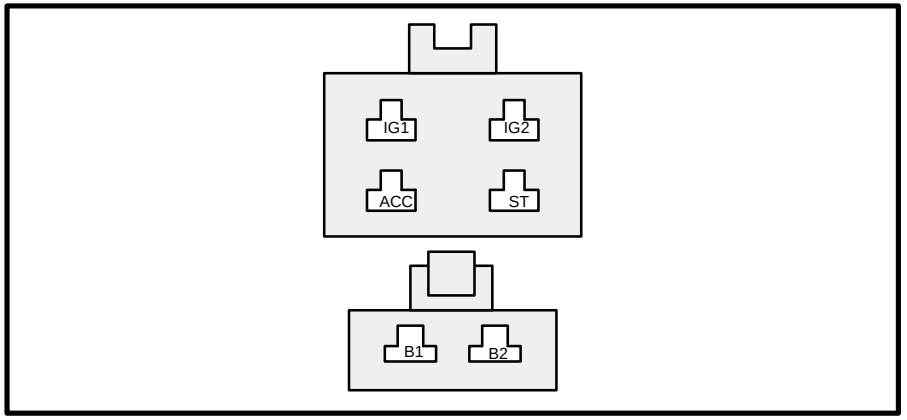
TERMINALS