C310a (BK)

14A005

Restraints control module (14B321)

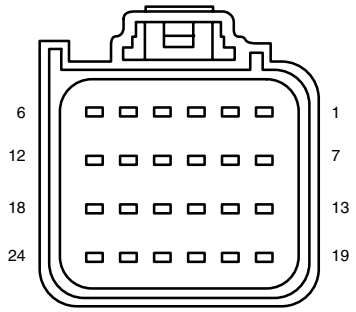

F24023

Pin	Circuit	Circuit function
1	614 (GY/OG)	Driver air bag, feed 1
2	615 (GY/WH)	Driver air bag, return 1
3	607 (LB/OG)	Passenger air bag, feed 1
4	616 (PK/BK)	Passenger air bag, return 1
5	1516 (YE/WH)	Driver air bag, feed 2
6	1517 (RD/OG)	Driver air bag, return 2
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	70 (LB/WH)	ISO Bus
12	609 (OG/YE)	Voltage supplied in Start and Run (overload protected)
13	1518 (RD/WH)	Passenger air bag, feed 2
14	1519 (LG/RD)	Passenger air bag, return 2
15	–	not used
16	649 (BK/OG)	Ground
17	–	not used
18	–	not used
19	608 (BK/YE)	Air bag indicator, control
20	–	not used
21	609 (OG/YE)	Voltage supplied in Start and Run (overload protected)
22	1083 (LB/BK)	Air bag/safety belt status tone control
23	–	not used
24	–	not used