COMPONENT TESTING: RF SEAT CONTROL SWITCH 149-16

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Recline Circuit	7 and 5	Forward	Closed Circuit
	7 and 4	Back	Closed Circuit
Horizontal Movement	7 and 8	Forward	Closed Circuit
	7 and 10	Back	Closed Circuit
Rear Tilt Circuit	7 and 6	Down	Closed Circuit
	7 and 11	Up	Closed Circuit
Front Tilt Circuit	7 and 2	Down	Closed Circuit
Front Tilt Circuit (con't)	7 and 1	Up	Closed Circuit
Check Power and Ground Before Any Other Tests	12 and all others except 7	All four switches at rest	Closed Circuit
	7 and 12	All four switches at rest	Open Circuit

TERMINALS

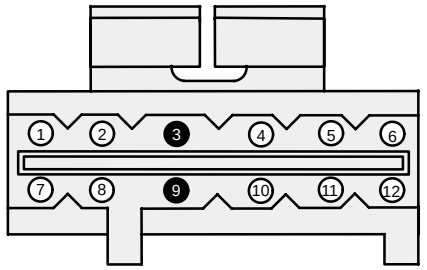

C609

(SIGNATURE AND CARTIER)
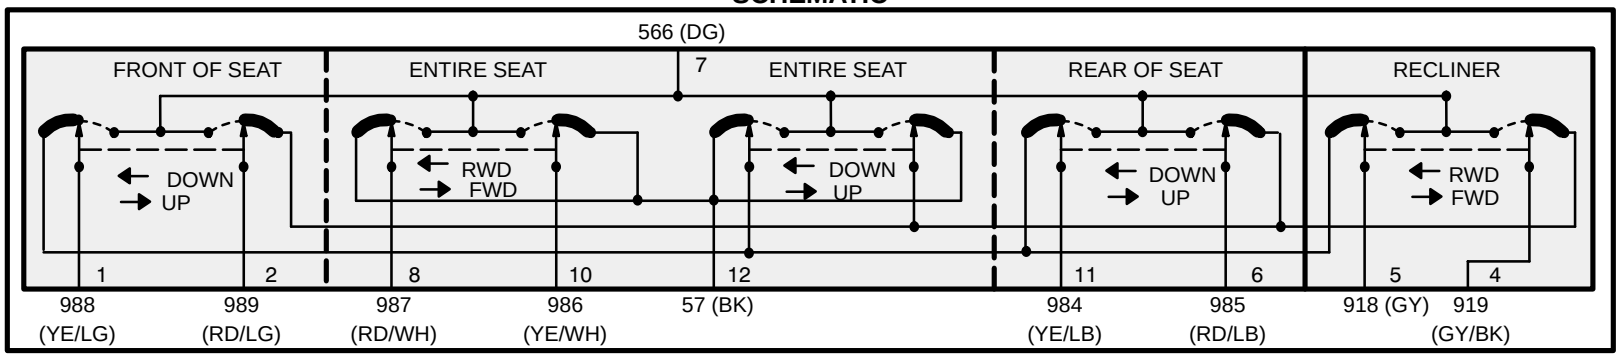
SCHEMATIC