Power seat switch, right – Navigator

Schematic

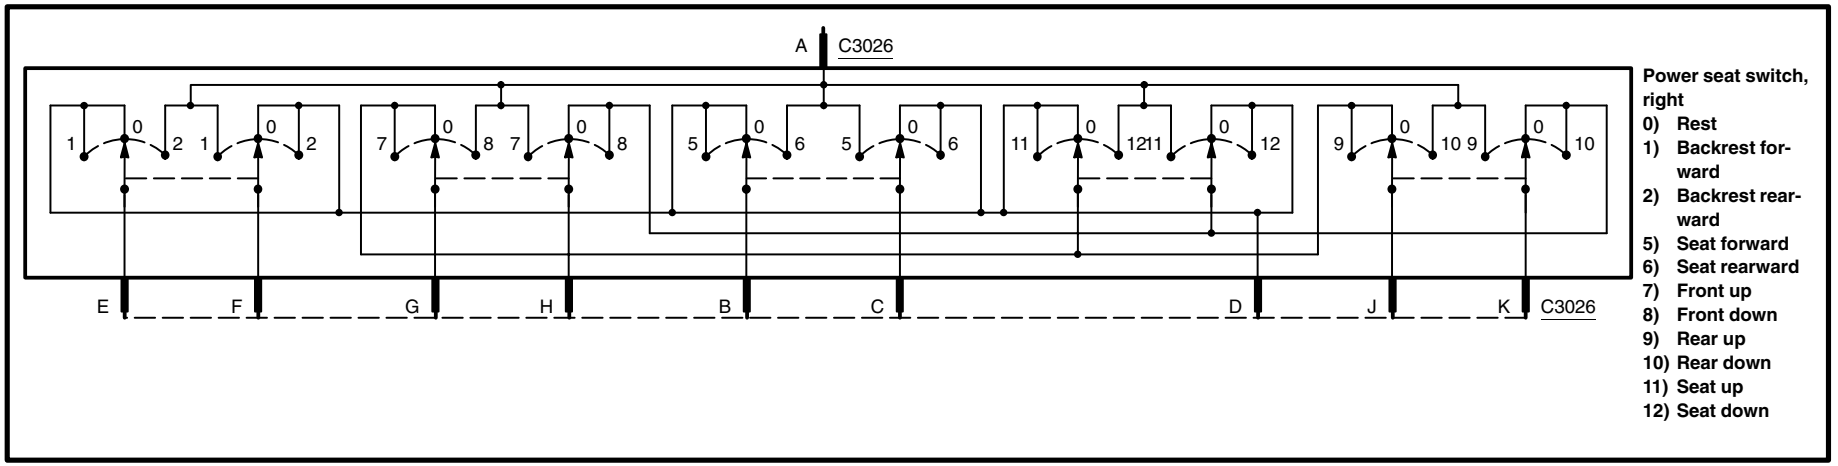

Terminals

C3026

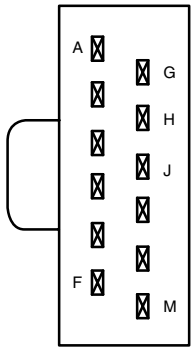

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Backrest circuit	A and F	Forward	Closed circuit
		Rest	Open circuit
		Rearward	
	A and E	Forward	Open circuit
		Rest	
		Rearward	Closed circuit
	D and F	Forward	Open circuit
		Rest	Closed circuit
		Rearward	
	D and E	Forward	Closed circuit
		Rest	
		Rearward	Open circuit