Wiper/washer switch

Schematic

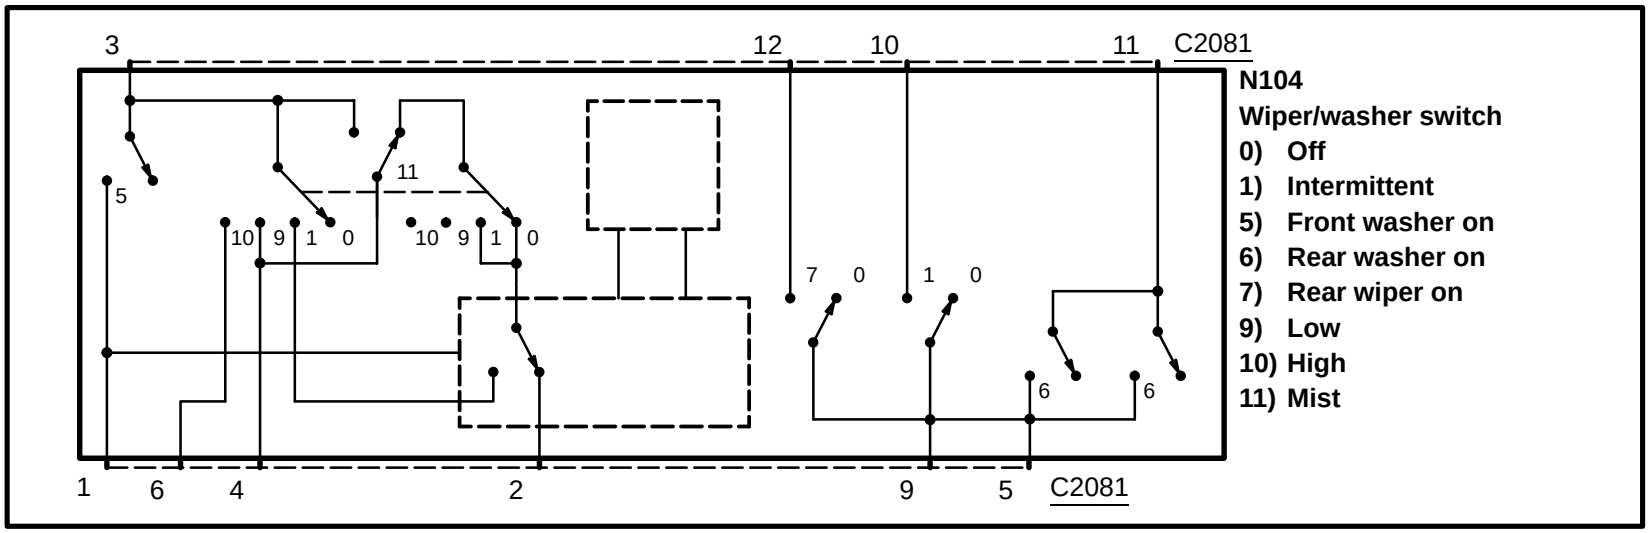

Terminals

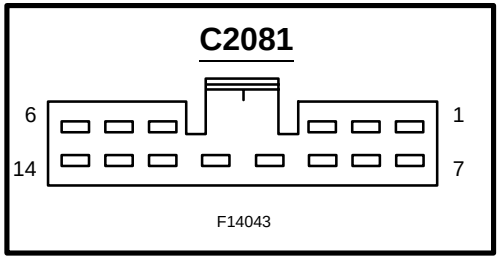

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Front washer switch circuit	3 and 1	On	Closed circuit
		Off	Open circuit
Front wiper switch circuit	3 and 4	Off	Open circuit
		Intermittent	Closed circuit
		Low	Open circuit
		Mist	Closed circuit
	3 and 6	High	Closed circuit
Rear washer switch circuit	11 and 5 11 and 9	On	Closed circuit
		Off	Open circuit
Rear wiper switch circuit	12 and 9 12 and 5	Off	Open circuit
		On	Closed circuit
	10 and 9 10 and 5	Intermittent	Closed circuit