Door lock switch, Passenger side

Schematic

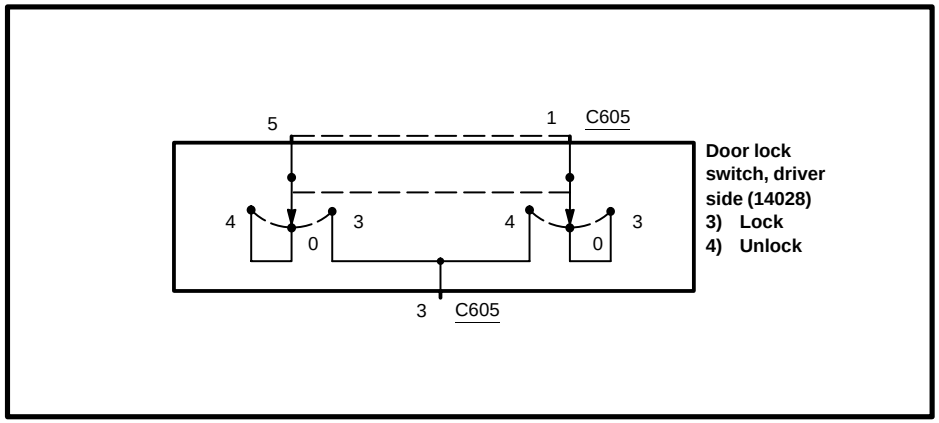

Terminals

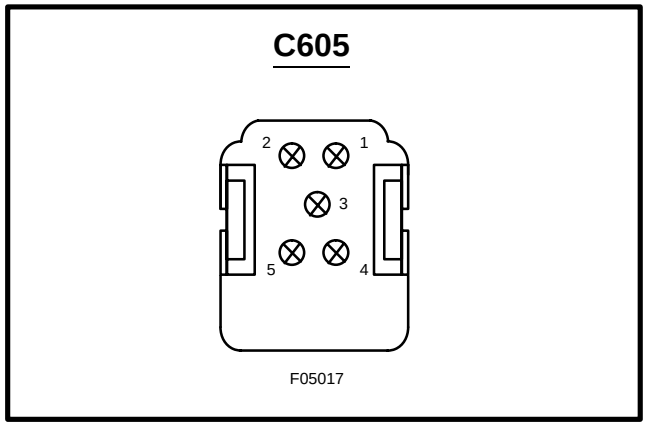

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indi-cate
Door lock switch	5 and 3	Lock	Closed circuit
		Unlock	Open circuit
		Neutral	Open circuit
	1 and 3	Lock	Open circuit
		Unlock	Closed circuit
		Neutral	Open circuit