C3140b

A190
Remote keyless
entry module
(15K602)

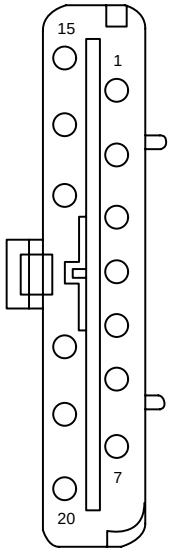

F20051

Pin	Circuit	Circuit function
1	–	not used
2	884 (YE/BK)	Hot at all times
3	118 (PK/OG)	Door lock relay, control
4	163 (RD/OG)	Driver door unlock relay, switched power
5	117 (PK/BK)	Door lock, output
6	121 (YE/BK)	Key pad common
7	53 (BK/LB)	Interior lamp relay, switched power, output
15	–	not used
16	884 (YE/BK)	Hot at all times
17	118 (PK/OG)	Door lock relay, control
18	117 (PK/BK)	Door lock, output
19	121 (YE/BK)	Drain wire, Lock, output
20	53 (BK/LB)	Interior lamp relay, switched power, output

C3141

14A200

N85
Door ajar switch,
right front



F03261

Pin	Circuit	Circuit function
1	–	not used
2	54 (LG/YE)	Voltage supplied at all times (overload protected)
3	53 (BK/LB)	Interior lamp relay, switched power, output