C925

14334

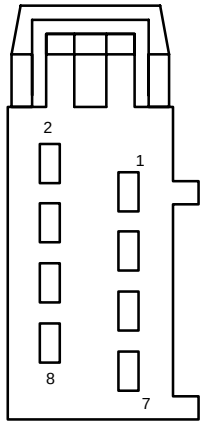

F08112

PIA

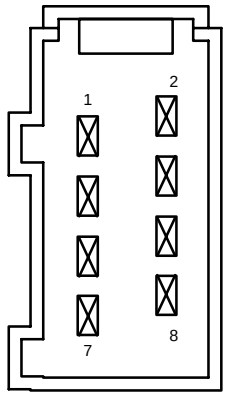

F08114

(1) 705 (LG/OG)
(2) 53 (BK/LB)
(3) 1175 (TN/RD)
(4) –
(5) –
(6) 1174 (WH/RD)
(7) –
(8) 1205 (BK)

C928

PIA

Homelink module



F03329

Pin	Circuit	Circuit function
1	705 (LG/OG)	Battery saver relay, switched power
2	–	not used
3	1205 (BK)	Ground

C929 (GY)

14335

Interior/map lamps assembly, front



F03173

Pin	Circuit	Circuit function
1	53 (BK/LB)	Interior lamp relay, switched power, output
2	1205 (BK)	Ground
3	705 (LG/OG)	Battery saver relay, switched power

C927 (GY)

14335

Cargo lamp assembly



F03173

Pin	Circuit	Circuit function
1	53 (BK/LB)	Interior lamp relay, switched power, output
2	1205 (BK)	Ground
3	705 (LG/OG)	Battery saver relay, switched power

C931 (BK)

14334/PIA

Interior/map lamps assembly, front



F04289

Pin	Circuit	Circuit function
1	705 (LG/OG)	Battery saver relay, switched power
2	1205 (BK)	Ground
3	53 (BK/LB)	Interior lamp relay, switched power, output
4	705 (LG/OG)	Battery saver relay, switched power