

College Physics 2

Capacitor Electrical Energy Storage and Dielectric

MPS Department | FEU Institute of Technology



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

College Physics 2

Parallel Plate Capacitor and Dielectric

MPS Department | FEU Institute of Technology



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

OBJECTIVES

- Describe the nature of parallel-plate capacitors
- Discuss dielectric materials.
- Determine the effects of adding dielectrics in a capacitor.
- Calculate the amount of energy stored in a capacitor



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

CAPACITOR

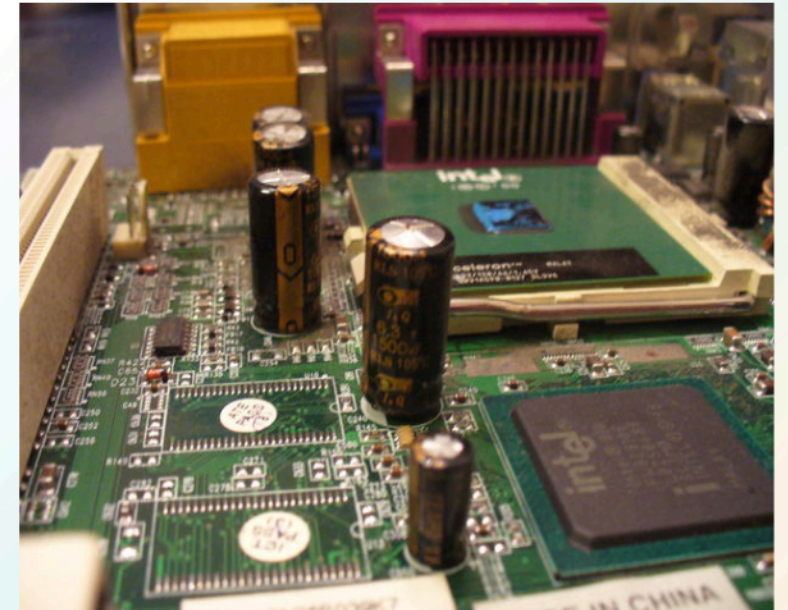
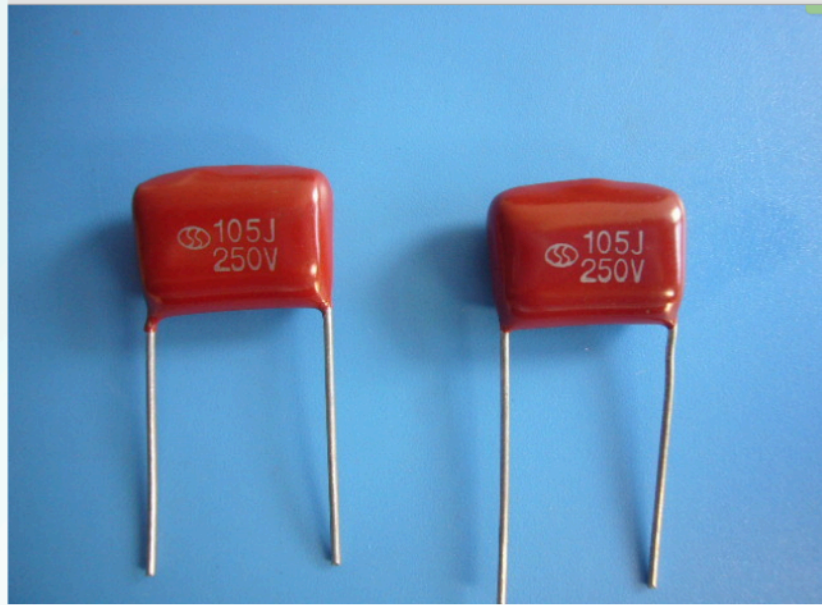


Figure 1 Types of Capacitors Source: Retrieved from <http://www.aliexpress.com> and <http://www.instructables.com>

CAPACITOR AND ITS FUNCTION

A **capacitor** is a passive two terminal electrical component that stores potential energy in an electric field.



Figure 2. Assorted commercially available capacitors.. From. *Sear's & Zemansky's University Physics With Modern Physics* (pp 793) by Young, H. D., Freedman, R. A. & A. Lewis Ford(2016). England: Pearson.

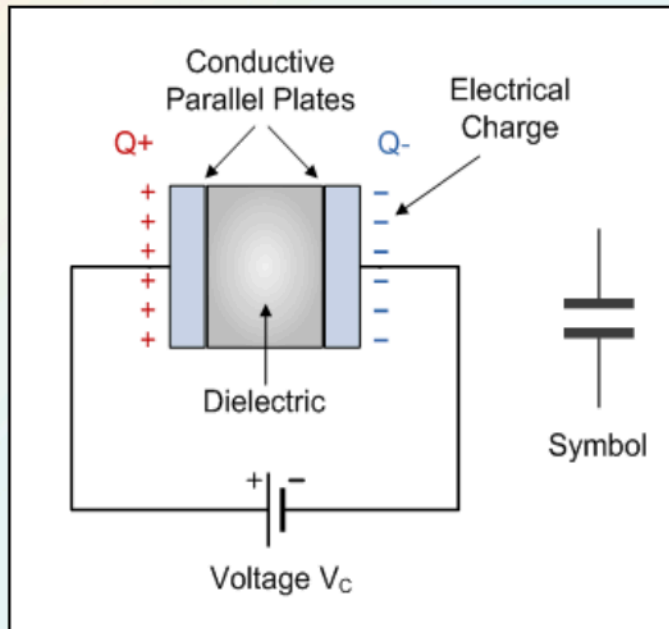


Figure 3. Conductive parallel plates. From <https://www.electronics-tutorials.ws/wp-content/uploads/2018/05/capacitor-cap1.gif>

It consists of two **conductors** separated by a **dielectric**.

It is **charged** when connected to a voltage source and **discharged** when connected to a load.



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

DIELECTRICS

A **dielectric** is a non-conducting material between the conducting plates of a capacitor.

FUNCTIONS OF A DIELECTRIC

- allows very small separation between conducting plates w/o actual contact
- increases the maximum possible potential difference between the capacitor plates
- increases the capacitance of the capacitor

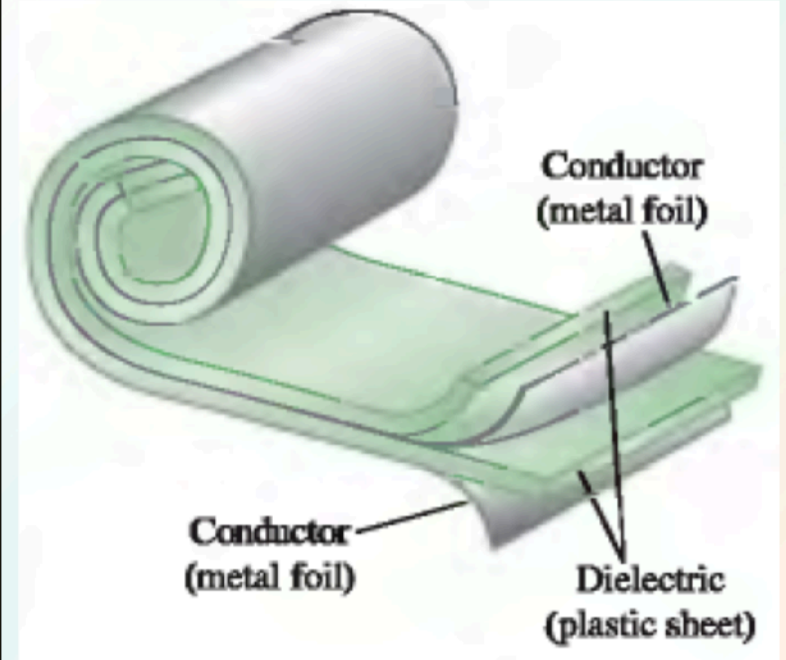


Figure 4. A common type of capacitor uses dielectric sheets to separate the conductors.. From. Sear's & Zemansky's University Physics With Modern Physics (pp 800) by Young, H. D., Freedman, R. A. & A. Lewis Ford(2016). England: Pearson.



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

CAPACITANCE


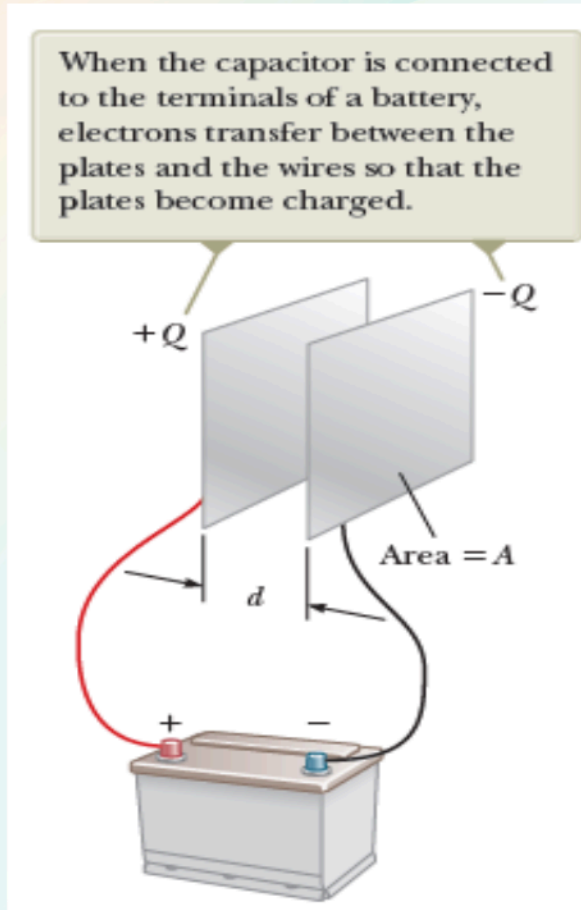


Figure 5. Parallel plate capacitor . From. *Physics for Scientists and Engineers with Modern Physics*(pp 778) by Serway, R. A., & Jewett, J. W. (2019). Australia: Cengage Learning.

- the plates have charges of equal magnitude but opposite signs Q and $-Q$
- there's uniform electric field E between the plates
- there's potential difference V_{ab} between the plates



CAPACITANCE

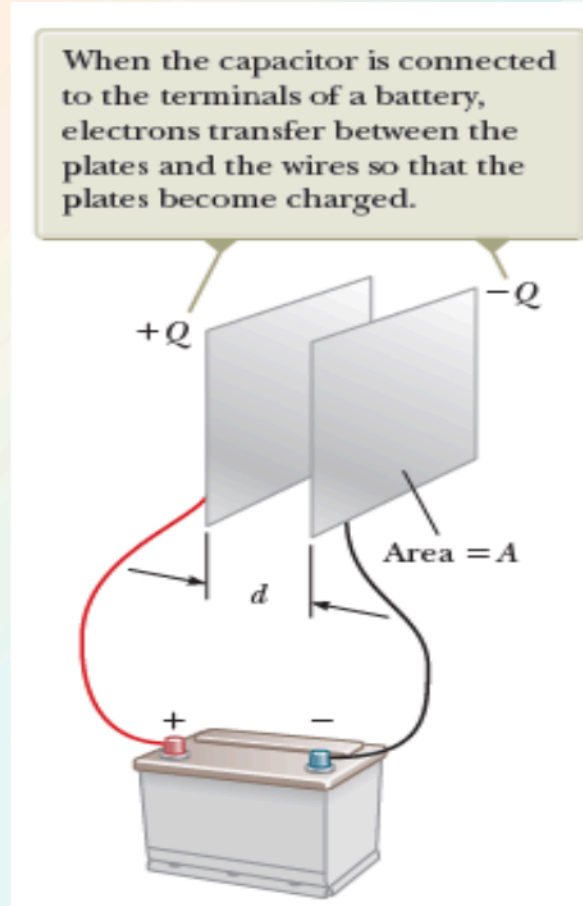

The amount of charge that must be stored in the conductors to produce a certain potential difference is called the **capacitance** and is given by:

$$C = \frac{Q}{V_{ab}}$$

where:

C is the capacitance in **farads (F)**

Q is the charge in **coulombs (C)**


V_{ab} is the potential difference in **volts (V)**

Figure 5. Parallel plate capacitor . From. *Physics for Scientists and Engineers with Modern Physics*(pp 778) by Serway, R. A., & Jewett, J. W. (2019). Australia: Cengage Learning.



FACTORS AFFECTING CAPACITANCE

C is directly proportional with A

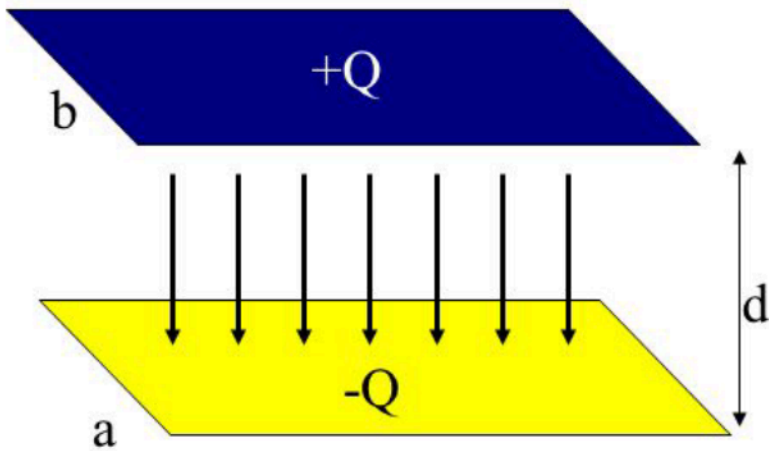

C is inversely proportional with d

For a parallel-plate capacitor consists of two plates each with area A and separated by a distance d , the capacitance is given by:

$$C = \epsilon_0 \frac{A}{d}$$

where:

C is the capacitance in **farads (F)**

A is the area of the plates in square meters **m²**

d is the separation distance of the plates in **meters (m)**

$$\epsilon_0 = 8.85 \times 10^{-12} \text{ F/m}$$

CAPACITANCE

Conceptual Question

Many computer keyboard buttons are constructed of capacitors as shown in the figure. When a key is pushed down, the soft insulator between the movable plate and the fixed plate is compressed. What happens to the capacitance when the key is pressed?

Ans: It increases.


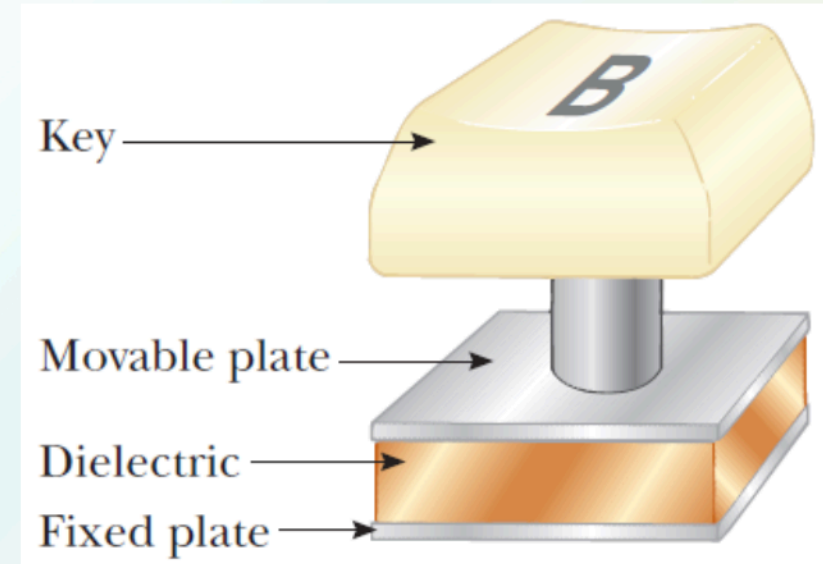


Figure 7. Computer Keyboard Button. From. *Physics for Scientists and Engineers with Modern Physics*(pp 780) by Serway, R. A., & Jewett, J. W. (2019). Australia: Cengage Learning.

Parallel Plate Capacitor

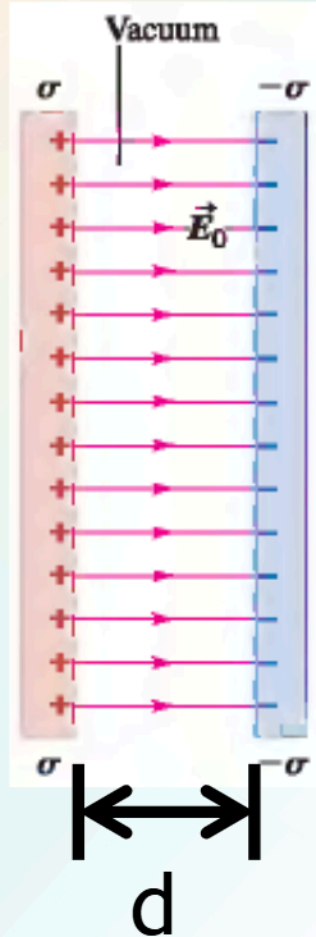

A

$$E = \frac{\sigma}{\epsilon_0} \rightarrow \sigma = \frac{Q}{A} \rightarrow E = \frac{Q}{\epsilon_0 A}$$

$$V_{ab} = Ed \rightarrow V_{ab} = \frac{Qd}{\epsilon_0 A} \rightarrow C = \frac{Q}{V_{ab}}$$

$$C = \epsilon_0 \frac{A}{d}$$

Depends only on
the geometry

- ↑ A, ↑ C
- ↑ d, ↓ C

- ↓ A, ↓ C
- ↓ d, ↑ C

Figure 8. Electric Field Lines with Vacuum between Plates .. From. Sear's & Zemansky's University Physics With Modern Physics (pp 801) by Young, H. D., Freedman, R. A. & A. Lewis Ford(2016). England: Pearson.



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

Values of Dielectric Constant at 20°C

Material	K	Material	K
Vacuum	1	Polyvinyl chloride	3.18
Air (1 atm)	1.00059	Plexiglas [®]	3.40
Air (100 atm)	1.0548	Glass	5–10
Teflon	2.1	Neoprene	6.70
Polyethylene	2.25	Germanium	16
Benzene	2.28	Glycerin	42.5
Mica	3–6	Water	80.4
Mylar	3.1	Strontium titanate	310

Table 1. Values of Dielectric Constant. From. Sear's & Zemansky's University Physics With Modern Physics (pp 801) by Young, H. D., Freedman, R. A. & A. Lewis Ford(2016). England: Pearson.



Parallel Plate Capacitor

for other Dielectric Material

$$C = k \epsilon_0 \frac{A}{d}$$

where: k = dielectric constant



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

Sample Problems

1. A parallel plate capacitor has a capacitance of 1.0 F. If the plates are 1.0mm apart, what is the area of the plates?

ANSWER: $1.1 \times 10^8 \text{ m}^2$

2. The plates of a parallel plate capacitor in vacuum are 5.0mm apart and 2.0 m^2 in area. A potential difference of 10,000 V is applied across the capacitor. Compute (a) the capacitance (b) the charge on each plate; and (c) the magnitude of electric field

ANSWER: (a) $0.00354 \mu\text{F}$ (b) $35.4 \mu\text{C}$ (c) $2.0 \times 10^6 \text{ N/C}$



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

ENERGY STORAGE IN CAPACITORS

The electric potential energy stored in a charged capacitor is just equal to the amount of work required to charge it. It is given by:

$$U = \frac{1}{2} CV_{ab}^2 = \frac{1}{2} QV_{ab}$$

where:

U is the electric potential energy in **joules (J)**

C is the capacitance in **farads (F)**

Q is the charge of the capacitor in **coulombs (C)**

V is the potential difference (voltage) in **volts (V)**



Sample Problems

3. A $5.80\ \mu\text{F}$, parallel-plate, air capacitor has a plate separation of $5.00\ \text{mm}$ and is charged to a potential difference of $4.00 \times 10^2\ \text{V}$. Calculate the energy stored in the capacitor.

ANSWER: $0.464\ \text{J}$

4. How much charge does a battery have to supply to a $5.0\ \mu\text{F}$ capacitor to create a potential difference of $1.5\ \text{V}$ across its plates?

ANSWER: $7.5\ \mu\text{C}$



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

REFERENCES

Serway, R. A., & Jewett, J. W. (2019). Physics for Scientists and Engineers with Modern Physics Tenth Edition. Australia: Cengage Learning.

Young, H. D., & Freedman, R. A. (2016). Sear's & Zemansky's University Physics With Modern Physics. England: Pearson.

<https://www.electronics-tutorials.ws/wp-content/uploads/2018/05/capacitor-cap1.gif>



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

College Physics 2

Capacitors in Series and Parallel

MPS Department | FEU Institute of Technology



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

OBJECTIVES

- Analyze capacitors connected in a network
- Calculate the total capacitance of capacitors in a network



FEU ALABANG




FEU DILIMAN



FEU TECH

Technology Driven by Innovation

CIRCUIT SYMBOLS

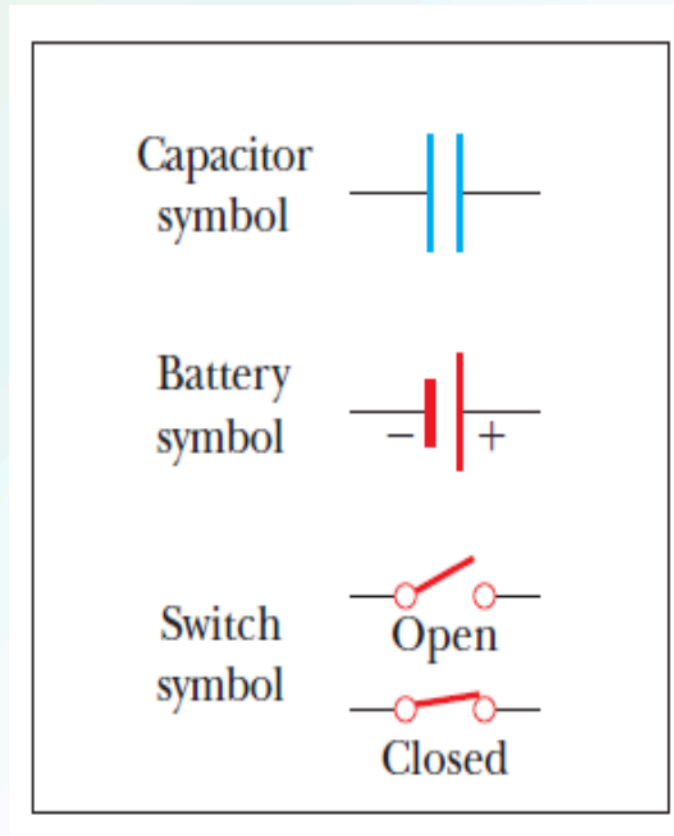

Circuit symbols for capacitors, batteries, and switches.

Figure 9 Computer Keyboard Button. From. *Physics for Scientists and Engineers with Modern Physics*(pp 782) by Serway, R. A., & Jewett, J. W. (2019). Australia: Cengage Learning.



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

CAPACITORS IN SERIES AND PARALLEL CONNECTION

For capacitors in series:

$$Q_T = Q_1 = Q_2 = Q_3$$

$$V_{ab} = V_1 + V_2 + V_3$$

$$\frac{1}{C_T} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3}$$

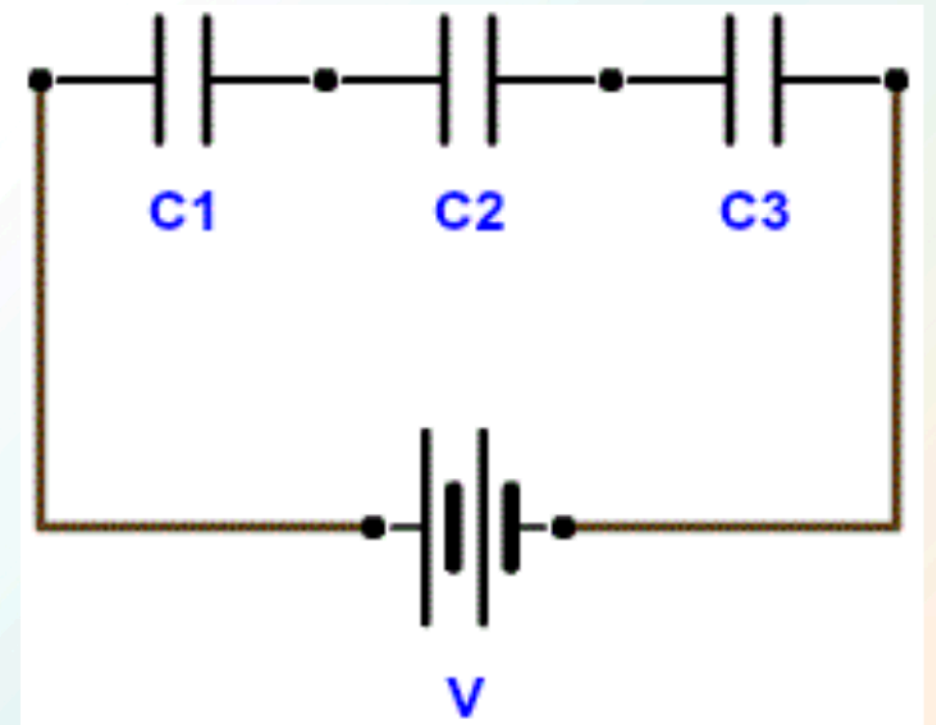


Figure 10. Capacitors in series. From.
https://cdn.shortpixel.ai/client/q_glossy,ret_img,w_228,h_183/https://electronicspani.com/wp-content/uploads/2014/11/Capacitors-in-Series.gif



CAPACITORS IN SERIES AND PARALLEL CONNECTION

For capacitors in parallel:

$$V_{ab} = V_1 = V_2 = V_3$$

$$Q_T = Q_1 + Q_2 + Q_3$$

$$C_T = C_1 + C_2 + C_3$$

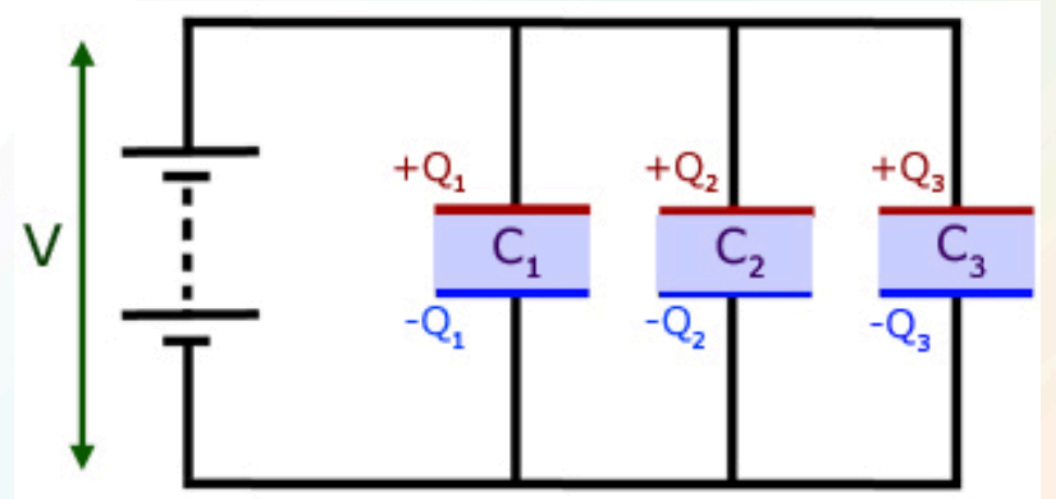


Figure11. Capacitors in parallel..From.https://tse3.mm.bing.net/th?id=OIP.90fBunwr_gzrkznVZBk1DCQAAAA&pid=Api&P=0&w=322&h=158

CAPACITORS IN SERIES AND PARALLEL CONNECTION

Conceptual Question

You want to connect a $4\ \mu F$ capacitor and an $8\ \mu F$ capacitor. What type of connection will the $4\ \mu F$ capacitor have a greater potential difference across it than the $8\ \mu F$ capacitor?

Ans: series connection



FEU ALABANG



FEU DILIMAN



FEU TECH

Technology Driven by Innovation

Sample Problems

1. Two capacitors, $C_1 = 6.0 \mu F$ and $C_2 = 3.0 \mu F$ are connected to a $18.0 V$ battery. Find the total capacitance and find the charge and potential difference for each capacitor when the two capacitors are connected (a) in series and (b) in parallel

ANSWER: (a) $2 \mu F$ (b) $9 \mu F$

2. Two capacitors, $C_1 = 5.0 \mu F$ and $C_2 = 12.0 \mu F$ are connected in parallel to a $9.0 V$ battery. Find (a) the total capacitance and (b) the potential difference across each capacitor.

ANSWER: (a) $17 \mu F$ (b) $9.0 V$



Sample Problem

Find the (a) total capacitance, (b) potential difference and (c) charge across each capacitor for the combination shown in the figure. Potential difference between pt. a and b is $V_{ab} = 28 \text{ V}$.

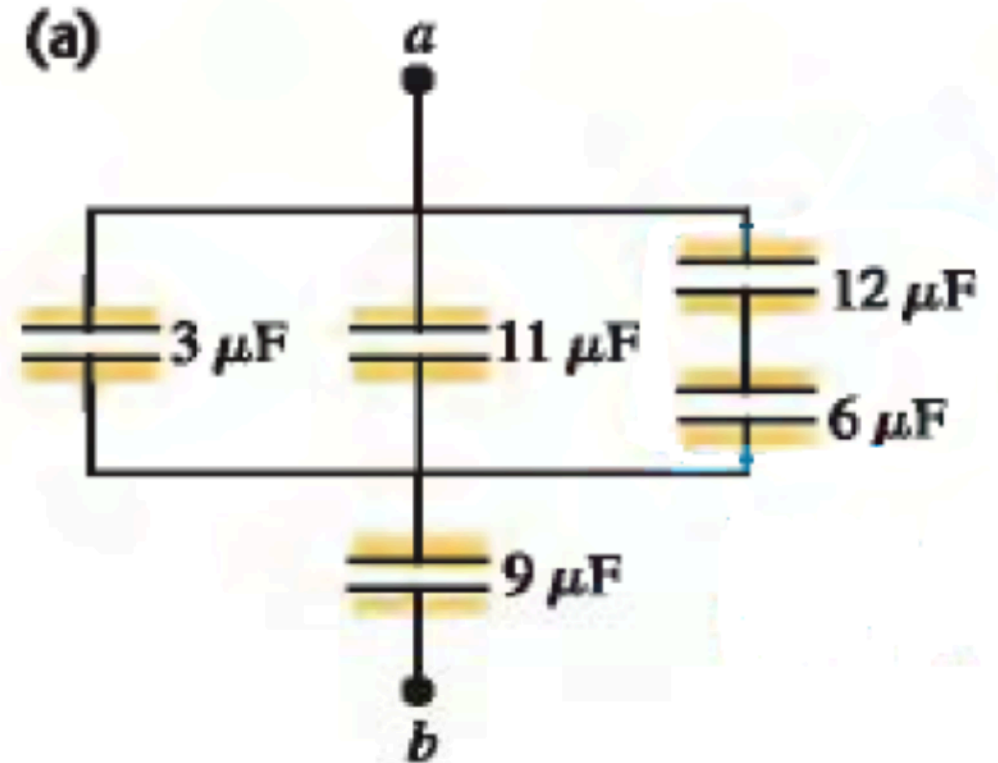


Figure 12. Capacitors in series and parallel. From: Sear's & Zemansky's University Physics With Modern Physics (pp 796) by Young, H. D., Freedman, R. A. & A. Lewis Ford(2016). England: Pearson



APPLICATIONS OF CAPACITORS



Figure 13. Application of capacitors. From.
<https://magazine.odroid.com/article/odroid-c2-power-off-wake-using-simple-gpio-button/>



Figure 14. TV Remote control.
From.<https://tse3.mm.bing.net/th?id=OIP.J5mtsttLmDjNQI17QLBHpwHaHa&pid=Api&P=0&w=300&h=300>



Figure 15. Camera with flash. From.
https://c.pxhere.com/photos/68/0e/camera_digital_equipment_female_girl_isolated_lens_people-1260303.jpg!d

protection when there are power surges

provides charge at a greater rate

REFERENCES

Serway, R. A., & Jewett, J. W. (2019). Physics for Scientists and Engineers with Modern Physics Tenth Edition. Australia: Cengage Learning.

Young, H. D., & Freedman, R. A. (2016). Sear's & Zemansky's University Physics With Modern Physics. England: Pearson.

https://cdn.shortpixel.ai/client/q_glossy,ret_img,w_228,h_183/https://electronicspani.com/wp-content/uploads/2014/11/Capacitors-in-Series.gif

<https://tse3.mm.bing.net/th?id=OIP.9OfBunwrgzrkznVZBk1DCQAAAA&pid=Api&P=0&w=322&h=158>

<https://tse3.mm.bing.net/th?id=OIP.J5mtsttLmDjNQI17QLBHpWHaHa&pid=Api&P=0&w=300&h=300>

https://c.pxhere.com/photos/68/0e/camera_digital_equipment_female_girl_isolated_ins_people-1260303.jpg!d

