BM20BC module

File: LeoPatch_MCU.kicad_sch

Power

File: LeoPatch_Power.kicad_sch

USB-C

File: LeoPatch_USB.kicad_sch

ECG front end

File: LeoPatch_ECG.kicad_sch

LEDs + button

File: LeoPatch_UI.kicad_sch

4xAA -> on/off -> reverse-polarity diode -> MCP1703A 3.3 V LDO -> BM20BC + AD8232 (USB-C 5 V also feeds the LDO)

ECG electrodes -> 3.5 mm jack -> AD8232 -> ECG_OUT -> nRF54LM20B AIN4 (P1.06)

Result LEDs, EXPORT button, SWD header (first flash), USB-C (updates + data). 4-layer, standard vias.

Rice ELEC 494 — LeoPatch

Sheet: /
File: LeoPatch_v2.kicad_sch

Title: LeoPatch v2 — newborn CCHD ECG screening (BM20BC, 4-layer, USB-


Size: A4	Date: 2026-11-03	**Rev: 2.0**
KiCad E.D.A. 9.0.7		Id: 1/6

MCU: Fanstel BM20BC module — nRF54LM20B (Arm M33 + Axon NPU), 32 MHz + 32 kHz crystals, DC/DC, chip antenna


Antenna end of the module sits at the board edge over a copper keep-out (Fanstel mounting guideline).

USB: VBUS (H7), D− (G6), D+ (G7) go to the USB-C sheet. SWDIO, RESET and USB use vias between module pads.


Decoupling, reset, SWD (as Fanstel EV-BM20)

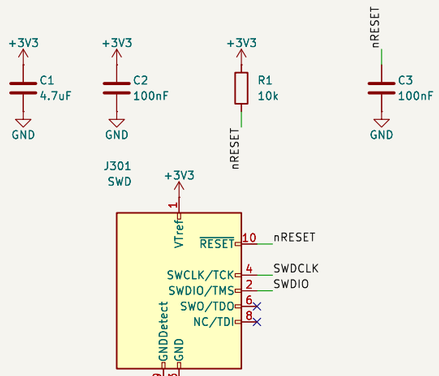

First flash only (MCUboot bootloader) with the nRF54LM20 DK "Debug out" 10-pin cable; after that, update over USB-C or BLE.

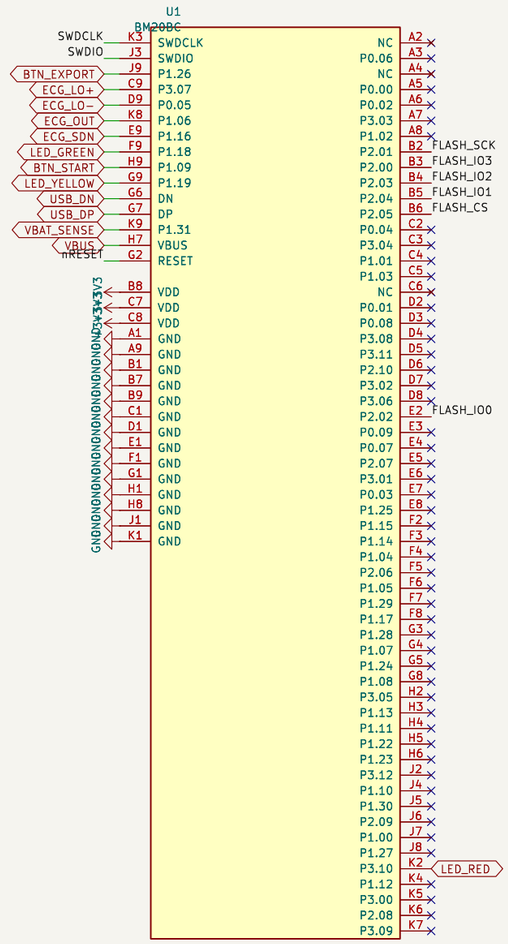


External flash: GD25WQ64E (8 MB) on P2.00–P2.05, same pins as the nRF54LM20 DK flash.
Place C4 next to U2 pin 8.



R2 keeps the flash deselected while the MCU pins float (reset, programming).



Test points (1 mm pads on the top side)



SW303 pulls nRESET low. R1 (10k) and C3 (100nF) are the pull-up and debounce.




Rice ELEC 494 — LeoPatch	
Sheet: /BM20BC module/	
File: LeoPatch_MCU.kicad_sch	
Title: LeoPatch v2 — Fanstel BM20BC (nRF54LM20B + NPU)	
Size: A3	Date: 2026-10-25
KiCad E.D.A. 9.0.7	Id: 2/6

POWER: 4xAA pack -> on/off switch -> reverse-polarity diode -> 3.3 V LDO

4xAA = 3.6 V (depleted) .. 6.4 V (fresh alkaline). MCP1703A: 16 V max in, 2 uA Iq, 250 mA.

USB-C 5 V joins VBAT through D102 (diode-OR with the battery path); D101 blocks it from the cells.


Battery input + regulator

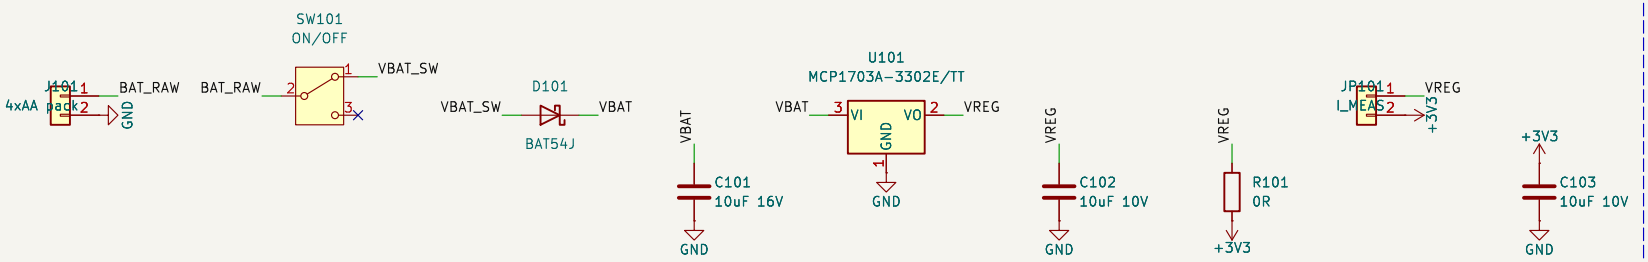


Current measurement: remove R101, connect PPK2 across JP101.

J103 VIN: external supply in, in parallel with the batteries and USB (
so it cannot back-feed either). 3.6 – 6 V. Clip the supply's minus to


Battery voltage monitor -> BM20BC K9 P1.31 (AIN1)

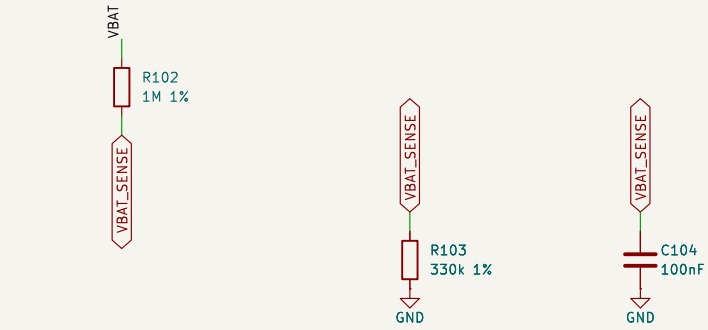

VBAT_SENSE = VBAT x 0.248 (6.4 V -> 1.59 V). ~4.8 uA divider load.



ERC power flags

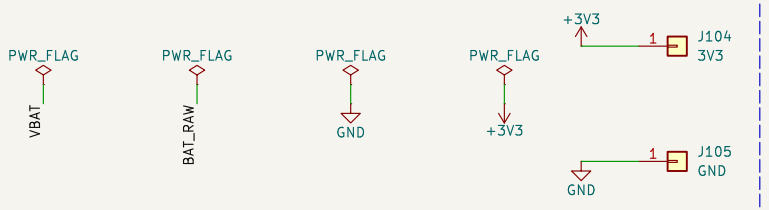

J104 3V3: 3.3 V rail out (or in from a bench supply: pull the JP101


Rice ELEC 494 – LeoPatch		
Sheet: /Power/		
File: LeoPatch_Power.kicad_sch		
Title: LeoPatch – Power (4xAA -> 3.3 V)		
Size: A4	Date: 2026-10-25	**Rev: 2.0**
KiCad E.D.A. 9.0.7		Id: 3/6

ECG FRONT END: AD8232 — component values copied 1:1 from SparkFun AD8232 Heart Rate Monitor (CC BY-SA 4.0)


Same circuit as the red AD8232 breakout modules the team is testing; their on-board heartbeat LED (D1/R16/SJ4) is omitted.

Lead cable: 3.5 mm TRS plug, Tip = RL (yellow), Ring = LA (green), Sleeve = RA (red) — same as module.

Input bias / protection / right-leg drive

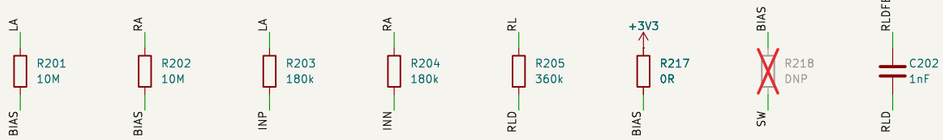


Electrode connectors






J202 = backup solder pads (same as module RA/LA/RL holes)

BM20BC pins: ECG_OUT -> K8 P1.06 (AIN4) LO+ -> C9 P3.07 LO- -> D9 P0.05 SDN -> E9 P1.16 (10k pull-up = always on)

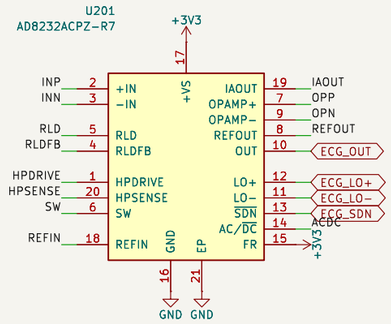

High-pass (0.5 Hz) / low-pass (~145 Hz) filter network, total gain ~200, reference, control




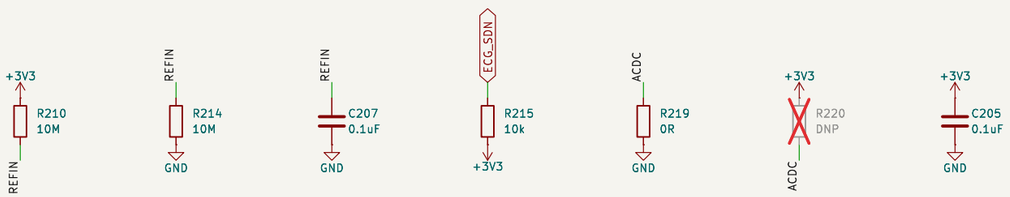

R219 fitted = AC lead-off mode (as SparkFun). R217 fitted / R218 DNP = inputs biased as SparkFun.

Rice ELEC 494 — LeoPatch		
Sheet: /ECG front end/		
File: LeoPatch_ECG.kicad_sch		
Title: LeoPatch — ECG front end (AD8232, SparkFun SEN-12650 circuit)		
Size: A3	Date: 2026-10-25	**Rev: 2.0**
KiCad E.D.A. 9.0.7		Id: 4/6

Result LEDs (active high)

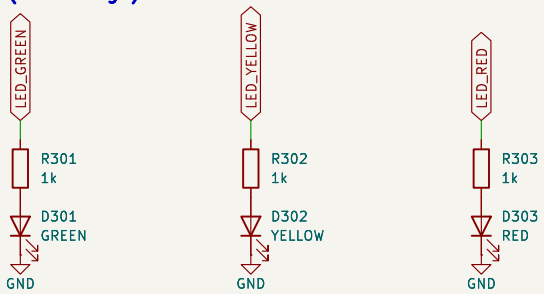


Green = signal OK / normal, Yellow = needs review, Red = abnormal / bad signal

Export button



Export the recording over BLE (P1.26, internal pull-up)




Rice ELEC 494 – LeoPatch		
Sheet: /LEDs + button/ File: LeoPatch_UI.kicad_sch		
Title: LeoPatch v2 – Result LEDs and export button		
Size: A4	Date: 2026-10-25	**Rev: 2.0**
KiCad E.D.A. 9.0.7		Id: 5/6

USB-C: USB 2.0 device to the nRF54LM20B USB controller, plus 5 V into the regulator

5.1k on CC1/CC2 = sink (device). USBLC6-2SC6 ESD on D+/D-/VBUS, right at the connector.


SAFETY: do not plug into a mains-powered computer while electrodes are on a patient (IEC 60601).

Connector, CC pull-downs, ESD, VBUS

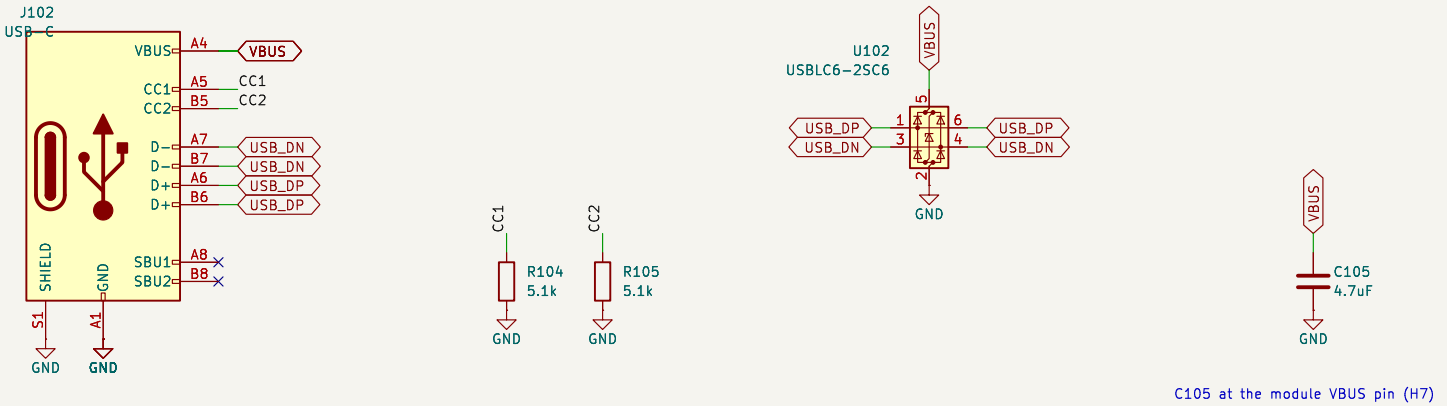

C105 at the module VBUS pin (H7)

ERC power flag



Rice ELEC 494 – LeoPatch

Sheet: /USB-C/
File: LeoPatch_USB.kicad_sch

Title: LeoPatch v2 – USB-C (update, data export, 5 V power)

Size: A4	Date: 2026-10-25	**Rev: 2.0**
KiCad E.D.A. 9.0.7		Id: 6/6