




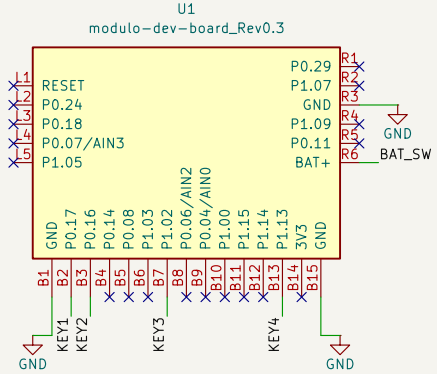

Power: AAA cell -> SW5 (2 = common, 3 = BAT+, 1 = NC) -> U1 R6 BAT+
U1 has reverse-polarity protection; no over-discharge cut-off in hardware



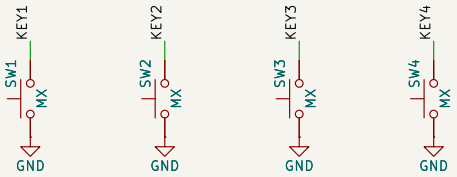

Keys: direct pin, nRF5340 internal pull-up (no resistors, no diodes)
KEY1 = B2 P0.17 / KEY2 = B3 P0.16 / KEY3 = B7 P1.02 / KEY4 = B13 P1.13

Sheet: /		
File: modulo-meishi-3.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/1