

NOTE

1 TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2

2 ALL DIMENSIONS ARE IN mm

3 VIEWING ANGLE: 6°CLOCK

4 POLARIZER: REFLECTIVE, POSITIVE

5 MULTIPLEX LEVEL: 1/4DUTY, 1/3BIAS

6 LCD DRIVING VOLTAGE(Vop) 3.3 V

7 OPERATING TEMP: -40°C~80°C

8 STORAGE TEMP: -40°C~90°C

9 DISPLAY TYPE: HTN


10 CONNECTOR: PIN

11 GLASS THICKNESS: FRONT--1.1 BACK--1.1

12 MATERIAL CONFORM TO THE ROHS STANDARD


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
COM1	COM1				湿度	6A		7A	P2	8A	%	9A	RH	10A	5D	°C	4D		3D	P1	2D	1D	温度	
COM2		COM2			6F	6B	7F	7B	8F	8B	9F	9B	10F	10B	5C	5E	4C	4E	3C	3E	2C	2E	1C	1E
COM3			COM3		6G	6C	7G	7C	8G	8C	9G	9C	10G	10C	5B	5G	4B	4G	3B	3G	2B	2G	1B	1G
COM4				COM4	6E	6D	7E	7D	8E	8D	9E	9D	10E	10D	5A	5F	4A	4F	3A	3F	2A	2F	1A	1F


VIEWING DIRECTION

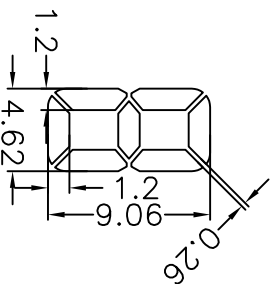

Dalian Good Display.,Ltd

Eff.Data	Rev.	Change Description
2015-01-27	A	new
2015-03-21	B	11版改反射

Dalian Good Display.,Ltd			
DESIGN MODEL		GDC03849	
REV.	B	DATE	2015.03.21
CUSTOMER MODEL		APPROVED BY	SY ZHAO
		CHECKED BY	SY ZHAO
PAGE 1/3		DRAWN BY	LJ WANG

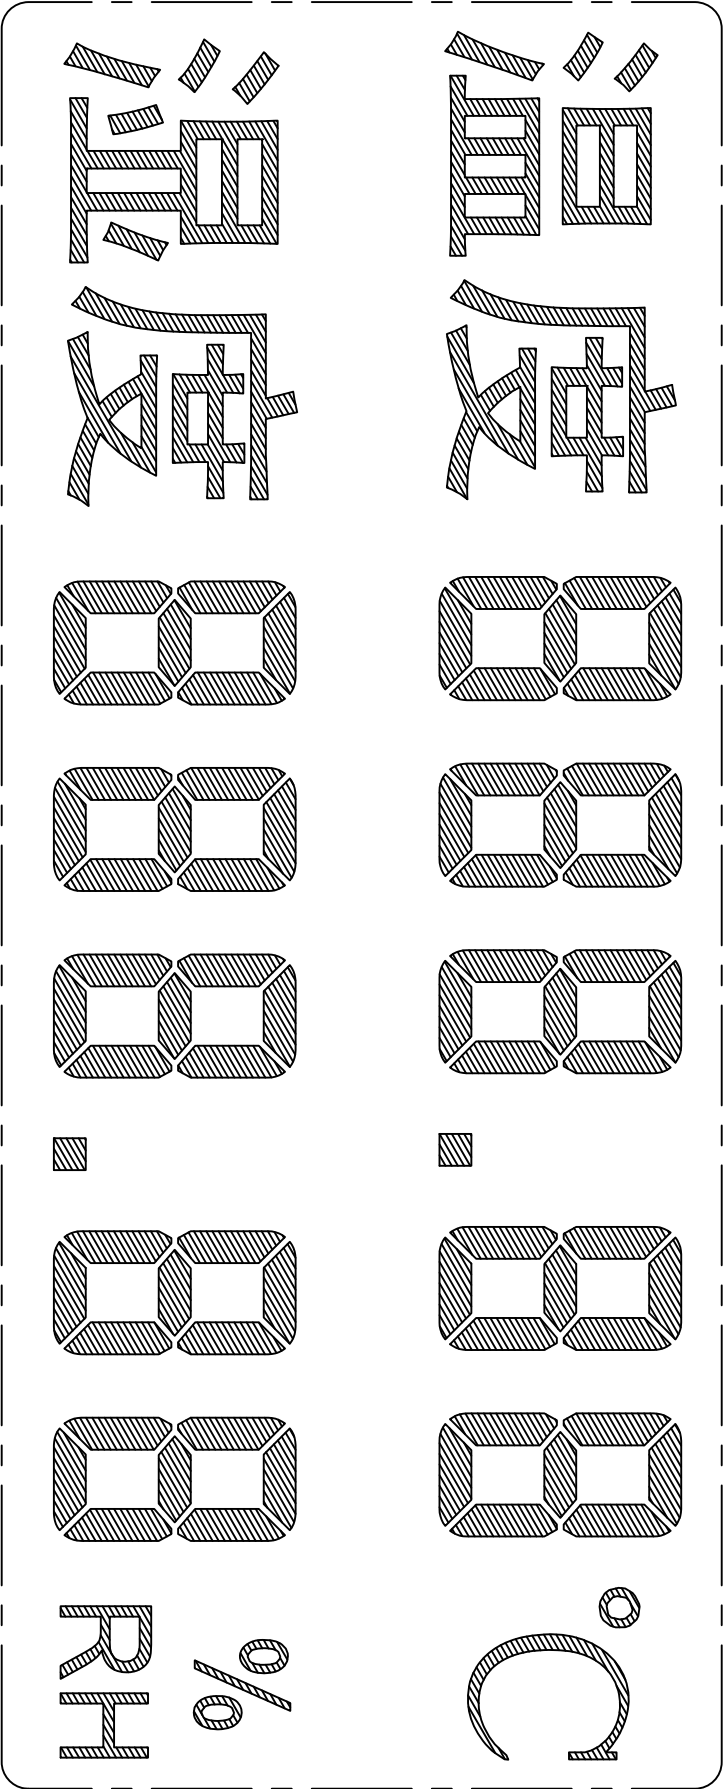

1

12

全显示效果图

Dalian Good Display.,Ltd

Eff.Date	Rev.	Change Description
2015-01-27	A	new
2015-03-21	B	11版改反射

DESIGN MODEL		GDC03849	
REV.	B	DATE	2015.03.21
CUSTOMER MODEL		APPROVED BY	SY ZHAO
		CHECKED BY	SY ZHAO
PAGE 2/3		DRAWN BY	LJ WANG

