
70 cm (430–440 MHz) harmonic filter, 7th-order Chebyshev low-pass, 50 ohm

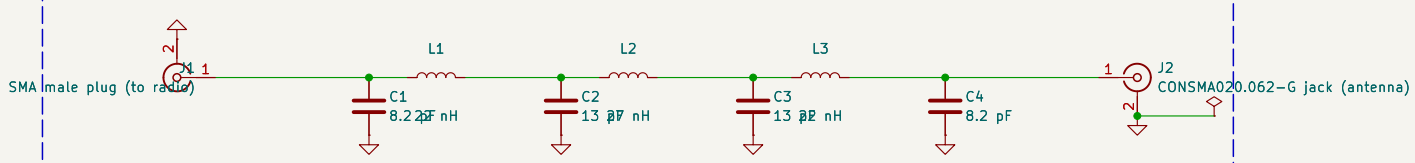

Passband 70 cm (430–440 MHz). Values chosen with a part-loss simulation (see ../uhf/uhf-response.svg).
C: C0G/NP0 0402, 50 V. L: high-Q air-core or ceramic 0402 chip inductors, 2–5 %.
Shunt-C first: C1–L1–C2–L2–C3–L3–C4. Max about 2 W (this is a harmonic filter for the radio's 1 W).
J1 is an SMA male plug (threaded coupling nut) that mates with the carrier's SMA jack; J2 is a jack for the antenna's plug.

Simulated, not yet measured
Harmonic filter for the 70 cm (430–440 MHz) band

Sheet: /
File: rdio-filter-uhf.kicad_sch

Title: rdio – 70 cm low-pass filter (430–440 MHz)

Size: A4	Date: 2026-11-05	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1