
2 m (144–146 MHz) harmonic filter, 7th-order Chebyshev low-pass, 50 ohm

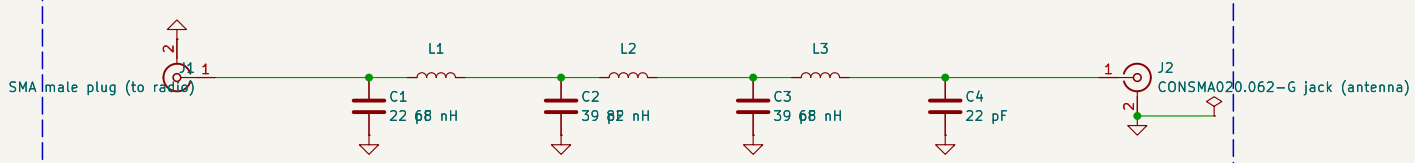

Passband 2 m (144–146 MHz). Values chosen with a part-loss simulation (see ../vhf/vhf-response.svg).
C: C0G/NP0 0402, 50 V. L: high-Q air-core or ceramic 0603 chip inductors, 2–5 %.
Shunt-C first: C1–L1–C2–L2–C3–L3–C4. Max about 2 W (this is a harmonic filter for the radio's 1 W).
J1 is an SMA male plug (threaded coupling nut) that mates with the carrier's SMA jack; J2 is a jack for the antenna's plug.

Simulated, not yet measured
Harmonic filter for the 2 m (144–146 MHz) band

Sheet: /
File: rdio-filter-vhf.kicad_sch

Title: rdio – 2 m low-pass filter (144–146 MHz)

Size: A4	Date: 2026-11-05	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1