
POWER INPUT, PROTECTION & 5 V REGULATION

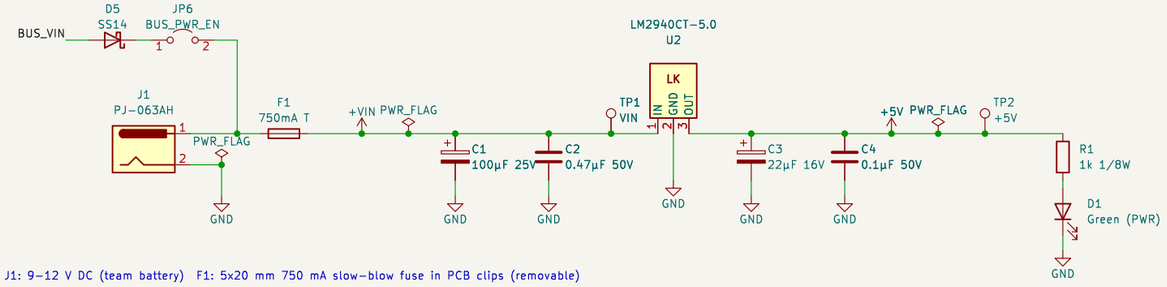


J1: 9–12 V DC (team battery) F1: 5x20 mm 750 mA slow-blow fuse in PCB clips (removable)

JP6 + D5: optional power from the team bus (J3 pin 7). Fit JP6 only if J1 is not used.

U2: 1 A LDO, 1 V max dropout, reverse-battery protected; C2 / C3 per datasheet (0.47 µF in, 22 µF out)

Heatsink on U2: ~3.9 W at 12.6 V in and 487.5 mA. D1 = power-on indicator.

LIDAR INTERFACE – WAVESHARE D500 (JST PH 2.0 mm, 4-pin)

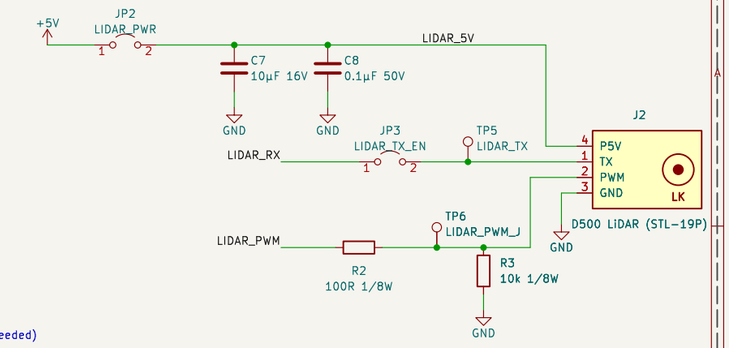


D500: 5 V / 290 mA, UART 230400 8N1, 3.3 V logic (no level shifter needed)

R3 holds PWM low = D500 internal 10 Hz speed control; RC6 PWM is optional


JP2 isolates LiDAR power, JP3 isolates LiDAR TX (sniff / inject data)

R2 limits current into the D500 PWM input

DEBUG LEDs & PUSHBUTTON

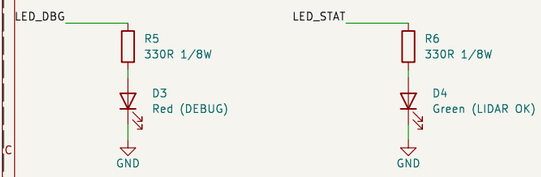

LED current: (3.3 – 2.0) / 330 ≈ 4 mA

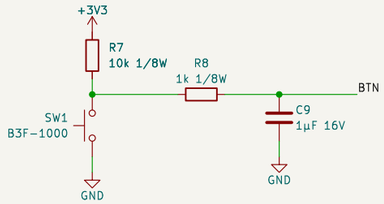


SW1 active-low. Hardware debounce:

(R7 + R8) x C9 = 11 ms release, R8 x C9 = 1 ms press

BTN pin uses Schmitt-trigger input (INLVL)

MICROCONTROLLER – PIC18F57Q43 CURIOSITY NANO

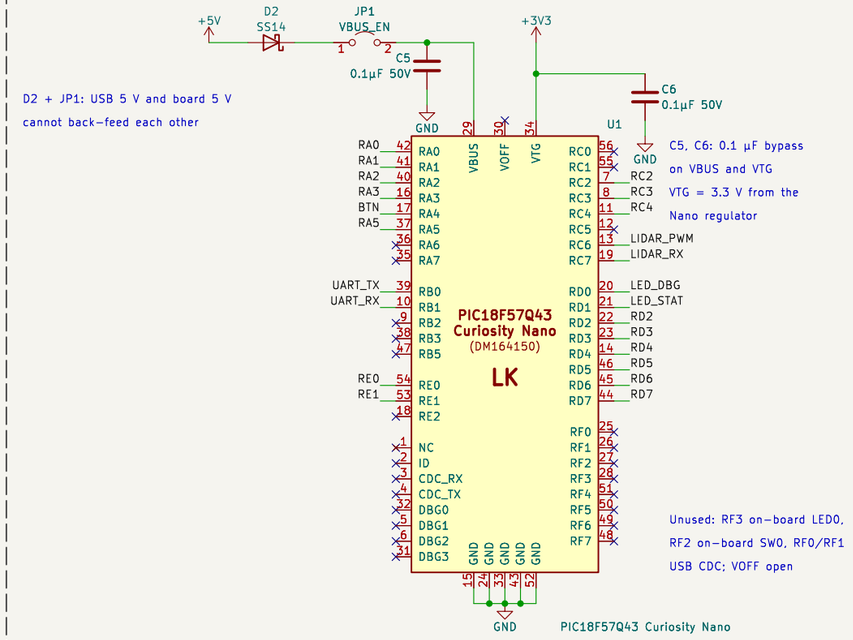

D2 + JP1: USB 5 V and board 5 V cannot back-feed each other


C5, C6: 0.1 µF bypass on VBUS and VTG

VTG = 3.3 V from the Nano regulator

Unused: RF3 on-board LED0, RF2 on-board SW0, RF0/RF1 USB CDC; VOFF open


PIC18F57Q43 Curiosity Nano

TEAM BUS – RIBBON CABLE TO MASTER

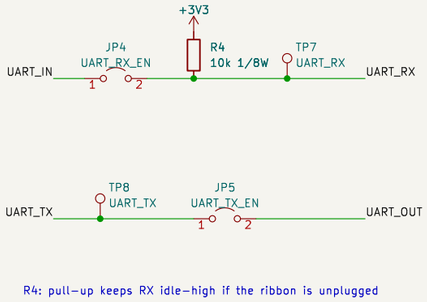

R4: pull-up keeps RX idle-high if the ribbon is unplugged

JP4 / JP5 isolate the team bus for debugging




J3 pin 1 = UART in (master TX -> RB1 / U2RX)

J3 pin 2 = UART out (RB0 / U2TX -> master RX)

J3 pin 7 = BUS_VIN (optional), pin 8 = GND, 3–6 reserved

EXPANSION HEADERS & TEST POINTS

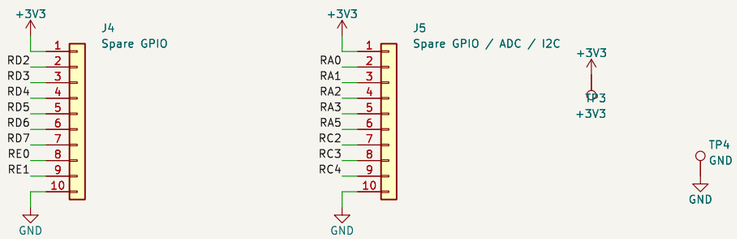

Other test points: TP1 VIN, TP2 +5V, TP5–TP8 on LiDAR / UART signals

DESIGN NOTES

LiDAR subsystem of OpenField (Team 1): reads the D500 360° DTOF LiDAR on UART1 (230400 baud) and reports to the MASTER board on UART2 via the ribbon.

Pin map: RC7 LIDAR_RX (U1RX), RC6 LIDAR_PWM, RB1 UART_RX (U2RX), RB0 UART_TX (U2TX), RD0 LED_DBG, RD1 LED_STAT, RA4 BTN

Power: +5V load 390 mA (LiDAR 290 + Nano 100) -> 487.5 mA with 25% margin; LM2940 rated 1 A -> 512.5 mA headroom

Ratings: all resistors 0805 1/8 W (>= 50% margin); capacitor voltages >= 25% above the rail they sit on

Custom symbols with initials (LK): U1 Curiosity Nano, J2 D500 LiDAR, U2 VReg

Analog sensor / actuator requirement is met at the system level (wheel encoders, cliff sensors), per the instructor.

Waveshare D500 LiDAR + PIC18F57Q43 Curiosity Nano

Landon Kuhman (LK)

RAS 304 Embedded Systems – Team 1 (OpenField)

Sheet: /

File: LiDAR_Subsystem_LK.kicad_sch

Title: LiDAR Subsystem Schematic

Size: A3	Date: 2026-10-21	**Rev: 1.0**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1