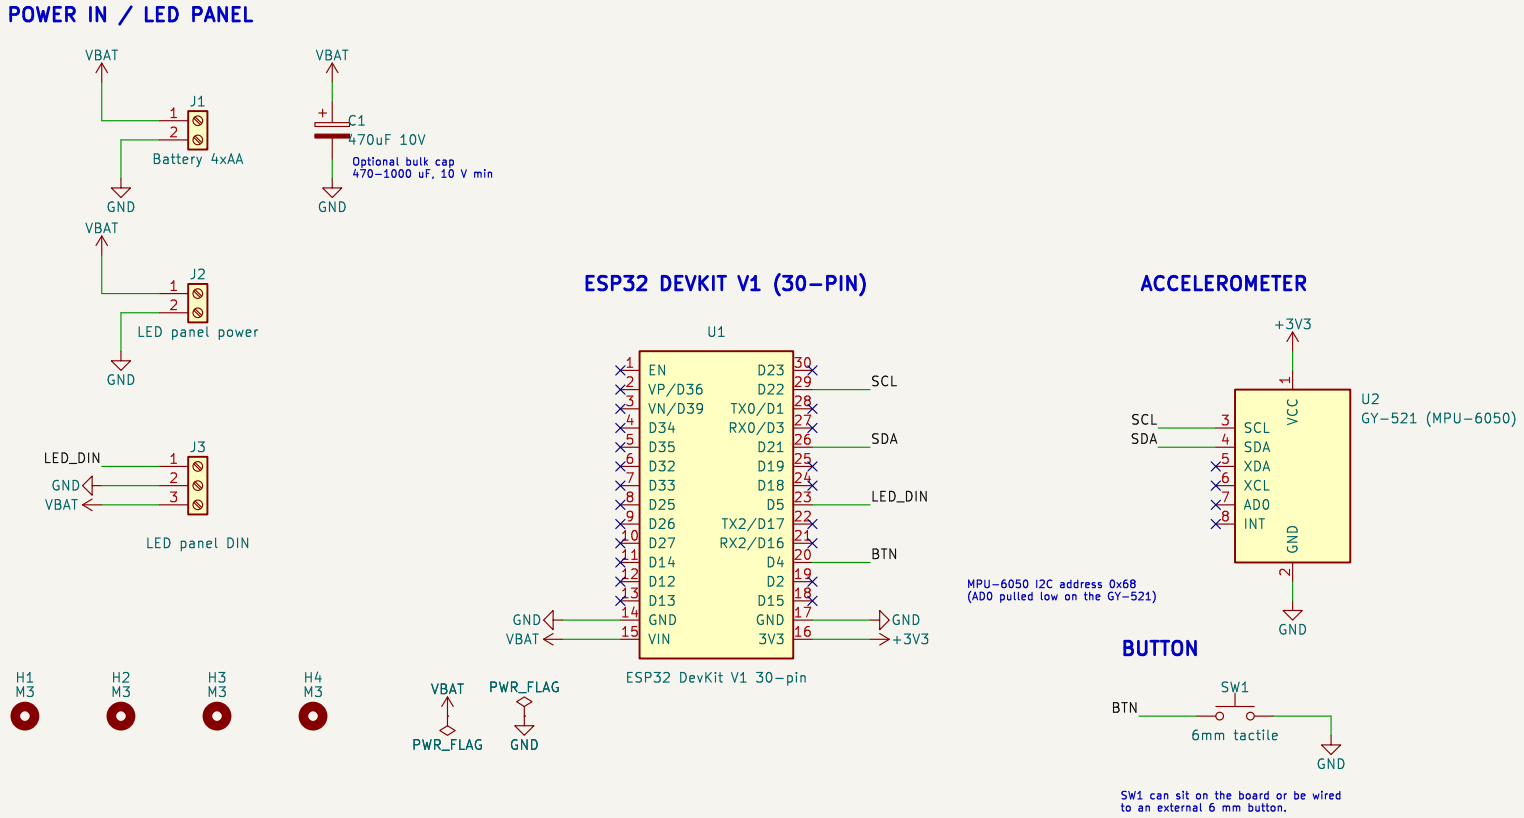


NOTES
1. Same connections as the kit's point–to–point wiring diagram:
   D5 (GPIO5) –> LED panel DIN, D4 (GPIO4) –> button to GND,
   D21/D22 –> MPU–6050 SDA/SCL, 3V3 –> MPU–6050 VCC.
2. The 4xAA pack (J1, has its own switch) feeds the LED panel's extra red/white
   power wires (J2) directly; the ESP32 runs from the same rail through VIN and
   its on–board 3.3 V regulator.
3. U1 accepts 30–pin ESP32 DevKit boards with 0.9 in (22.86 mm) or
   1.0 in (25.4 mm) header spacing; header 1 has both rows of holes.
4. J1–J3 accept 3.5 mm screw terminals or wires soldered straight in.

ESP32 DevKit V1 30–pin, GY–521 MPU–6050, WS2812B 8x8 panel, 4xAA
Replaces the point–to–point wiring of the PrintKits Digital Sand kit

Sheet: /
File: digital_sand.kicad_sch

Title: Digital Sand Toy – ESP32 Carrier

Size: A4	Date: 2026–10–19	**Rev: 1.0**
KiCad E.D.A. kicad–cli 7.0.7		Id: 1/1