

Illustrated Assembly Guide

Front is -Y, rear is +Y, left/right radiators are -X/+X, and +Z points toward the microphones. All torque values are ENGINEERING_ESTIMATE until the selected insert/process is pull-tested.

Exploded parts identification

Removal directions match the service sequence; official mechanics are shown in grey.



FRONT = -Y | TOP = +Z | units: mm


Exploded part identification

Exploded-view part key

Exact part name	Qty	Material
anti_slip_ring	1	TPU 95A
outer_shell	1	ASA
main_cabinet	1	ASA
pressure_divider	1	ASA
electronics_shroud	1	ASA
active_driver_clamp_ring	1	ASA
passive_radiator_clamp_ring	2	ASA
divider_gasket	1	2 mm closed-cell EPDM


Exact part name	Qty	Material
driver_gasket	1	2 mm closed-cell EPDM
passive_radiator_gasket	2	2 mm closed-cell EPDM
cable_gland	1	TPU 95A
base_skirt	1	ASA
bottom_service_plate	1	ASA
ballast_cartridge	1	ASA
ballast_cartridge_lid	1	ASA

Fastener identification - proportional dimensions




F01

M3 × 6 ISO 4762 socket cap



F02 / F06 / F08 / F09

M3 × 8 ISO 7380-1 button head; F09 adds washer



F03 / F04 / F05 / F07

M3 × 10 ISO 4762 socket cap

All screws: M3 × 0.5, A2-70 stainless. Use a 2.0 mm hex tool. Torque 0.35 N m target; never exceed 0.45 N m. Use stated dimensions, not printed-page scale.


Fastener identification

Step 1: Identify and inspect the hardware

- Parts: Batch 1 Core rev4.1, HAT rev4.1, official Squiracle upper stack
- Fasteners: none
- Tools: bright light; calipers
- Gasket/seal: none
- Action: Confirm the board revision labels. Reject Batch 2 / Satellite1.1 for this release. Inspect every printed sealing face and remove strings without rounding an edge.
- Pass: Correct Batch 1 hardware is present; no crack, warp, blocked bore, or damaged gasket land.
- Warning: Do not force or approximately place the Core. Its exact stack placement requires the physical official hardware.

Assembly stage 1

Confirm Batch 1 hardware and inspect every printed sealing land.

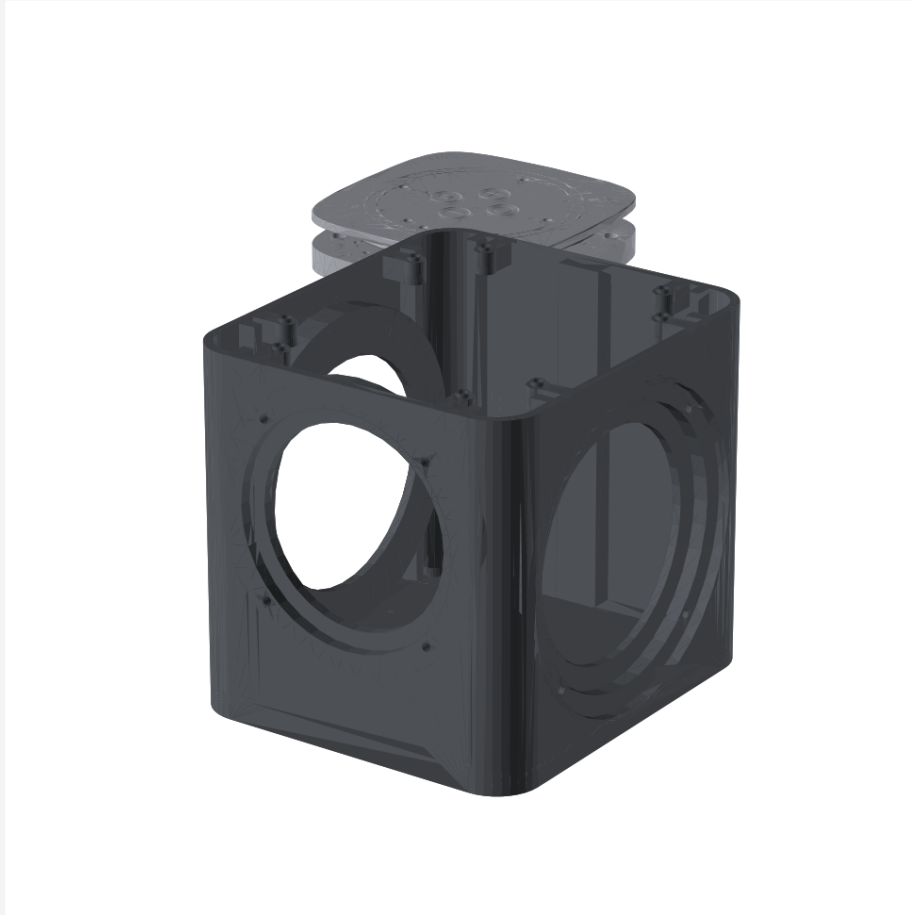

FRONT = -Y | TOP = +Z | units: mm

Step 1 - Identify and inspect the hardware

Step 2: Install and cold-check all M3 inserts

- Parts: main_cabinet, pressure_divider, base_skirt, ballast_cartridge, outer_shell
- Fasteners: H01 inserts
- Tools: temperature-controlled iron; M3 insert tip; square
- Gasket/seal: none
- Action: At 250-270 C, press each insert into its labeled blind bore until flush and square. Let every insert cool for five minutes. Thread an M3 screw by hand for three turns.
- Pass: No insert spins, tilts, protrudes, or blocks before three turns.
- Warning: Do not torque a hot insert. Fumes and the iron can burn; ventilate and use eye protection.

Assembly stage 2

Install every insert square in its blind bore; let it cool before checking.



FRONT = -Y | TOP = +Z | units: mm


Step 2 - Install and cold-check all M3 inserts

Step 3: Wire and clamp the active driver

- Parts: main_cabinet, Dayton ND91-4, driver_gasket, active_driver_clamp_ring, JST-XH lead
- Fasteners: F04, 4 screws
- Tools: 2.0 mm hex; crimper or soldering iron; polarity tester
- Gasket/seal: G02
- Action: Mark the red conductor positive. Connect red to the terminal marked + and black to -. Face the terminals upward. Center G02, seat the driver from the -Y/front side, fit the clamp ring, and tighten F04 in two diagonal passes to 0.35 N m; never exceed 0.45 N m.
- Pass: Ring bottoms evenly; gasket is not visible in the bore; cone moves outward on a brief 1.5 V positive polarity pulse.
- Warning: Use only a brief low-voltage polarity pulse. Never connect a loose driver to the powered HAT.

Assembly stage 3

FRONT is -Y. Red wire to +; tighten F04 diagonally to 0.35 N m.

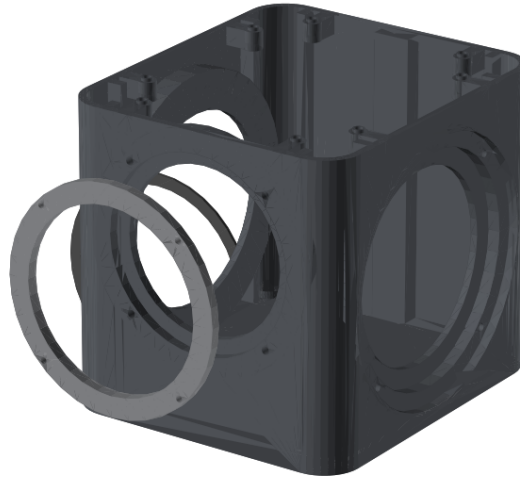

FRONT = -Y | TOP = +Z | units: mm

Step 3 - Wire and clamp the active driver

Step 4: Mass-match and clamp both passive radiators

- Parts: 2 SB12PACR-00, 2 passive_radiator_gaskets, 2 clamp rings, matched M6 washer stacks
- Fasteners: F05, 8 screws total
- Tools: 0.01 g scale; 2.0 mm hex
- Gasket/seal: G03, one per side
- Action: Weigh two identical tuning stacks to the value in reports/acoustics/summary.json. Secure one to each M6 post. Install radiators on +/-X with matching orientation, then tighten each F05 crosswise to 0.35 N m; never exceed 0.45 N m.
- Pass: Added masses match within 0.02 g; both rings bottom evenly; surrounds move freely and do not touch the shell keep-out.
- Warning: Unequal mass defeats reaction-force cancellation. Do not press on either cone.

Assembly stage 4

Install equal measured mass on both $\pm X$ radiators; cross-tighten F05.



FRONT = -Y | TOP = +Z | units: mm

Step 4 - Mass-match and clamp both passive radiators

Step 5: Route the cable, close the divider, and leak-check

- Parts: pressure_divider, divider_gasket, leak_test_adapter, cable_gland
- Fasteners: F03, 8 screws
- Tools: 2.0 mm hex; hand bulb; 0-500 Pa gauge; leak-detection solution
- Gasket/seal: G01; temporary adapter then G04
- Action: Pass both conductors through the divider. Fit the temporary adapter over them, place G01 without twists, and tighten F03 in a star pattern to 0.35 N m. Apply only 100-250 Pa with a hand bulb. Brush leak solution on external gasket seams; no bubbles are allowed. Vent, pull the adapter upward, and install G04 with its flange toward the electronics bay.
- Pass: No growing bubbles, abnormal diaphragm displacement, or audible leak; final gland cannot rotate or lift by finger force.
- Warning: Never use shop air, never exceed 250 Pa, and keep liquid away from electronics. This is a gross-leak screen, not an acoustic-Q measurement.

Assembly stage 5

Close G01, gross-screen at only 100–250 Pa, then fit G04 flange-up.



FRONT = -Y | TOP = +Z | units: mm


Step 5 - Route the cable, close the divider, and leak-check

Step 6: Install the base and retained ballast

- Parts: base_skirt, ballast_cartridge, 2 steel plates, ballast lid, bottom_service_plate
- Fasteners: F06, F07, F08
- Tools: 2.0 mm hex; scale
- Gasket/seal: none
- Action: Attach the base skirt with F07. Place both deburred dry plates flat in the cartridge; there must be no rocking. Install the lid with F06, insert the cartridge from below, and capture it with the bottom service plate using F08.
- Pass: Cartridge mass is approximately 1054 g; no plate moves when shaken gently; all four lid screws engage at least 3 mm.
- Warning: The steel stack is heavy. Keep fingers clear and do not operate the unit without the retained lid and service plate.

Assembly stage 6

Two 110 × 122 × 5 steel plates are enclosed by the four-screw lid.

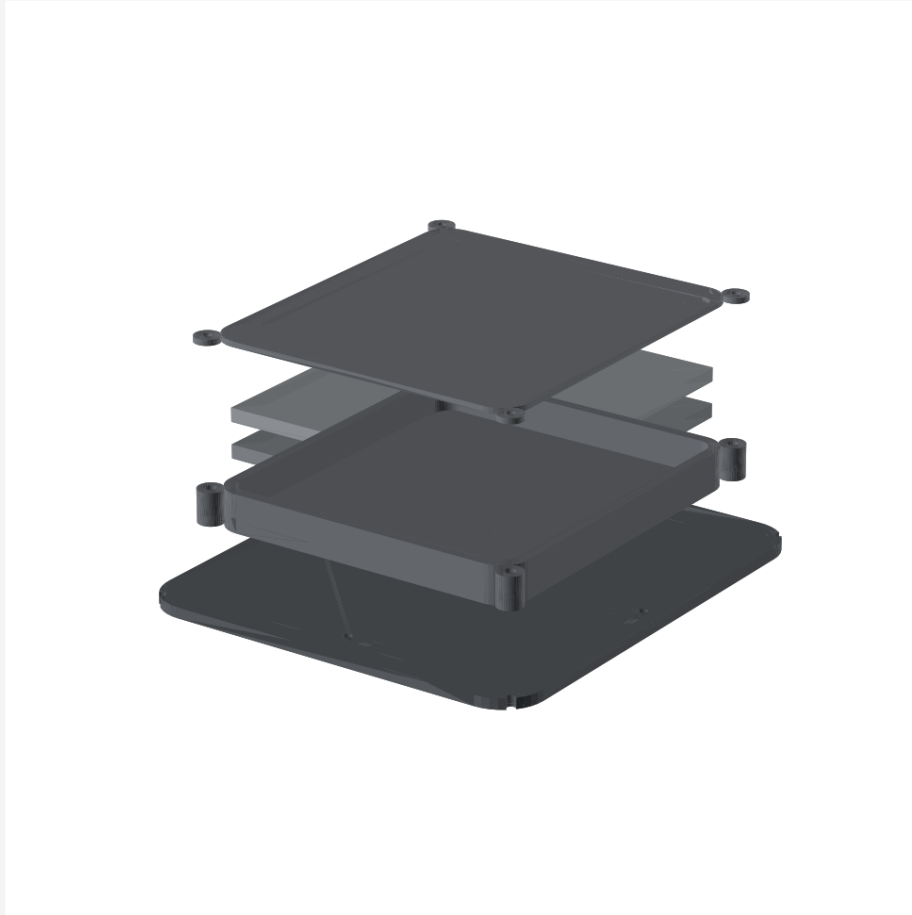

FRONT = -Y | TOP = +Z | units: mm


Step 6 - Install the base and retained ballast

Step 7: Install and lock the outer shell

- Parts: outer_shell; lower assembly
- Fasteners: F09, 4 screws with nylon washers
- Tools: 2.0 mm hex
- Gasket/seal: none
- Action: Align FRONT with -Y and slide the shell downward without touching either surround. Invert on a soft mat and install F09 through the bottom service plate into the shell bosses.
- Pass: Every slot is clear; shell has an even reveal and at least 2 mm moving-part clearance; no wire is visible near a cone.
- Warning: Stop if the shell contacts a clamp ring or surround. Do not flex the shell over an obstruction.

Assembly stage 7

Align FRONT=-Y and lower the shell without contacting a surround.

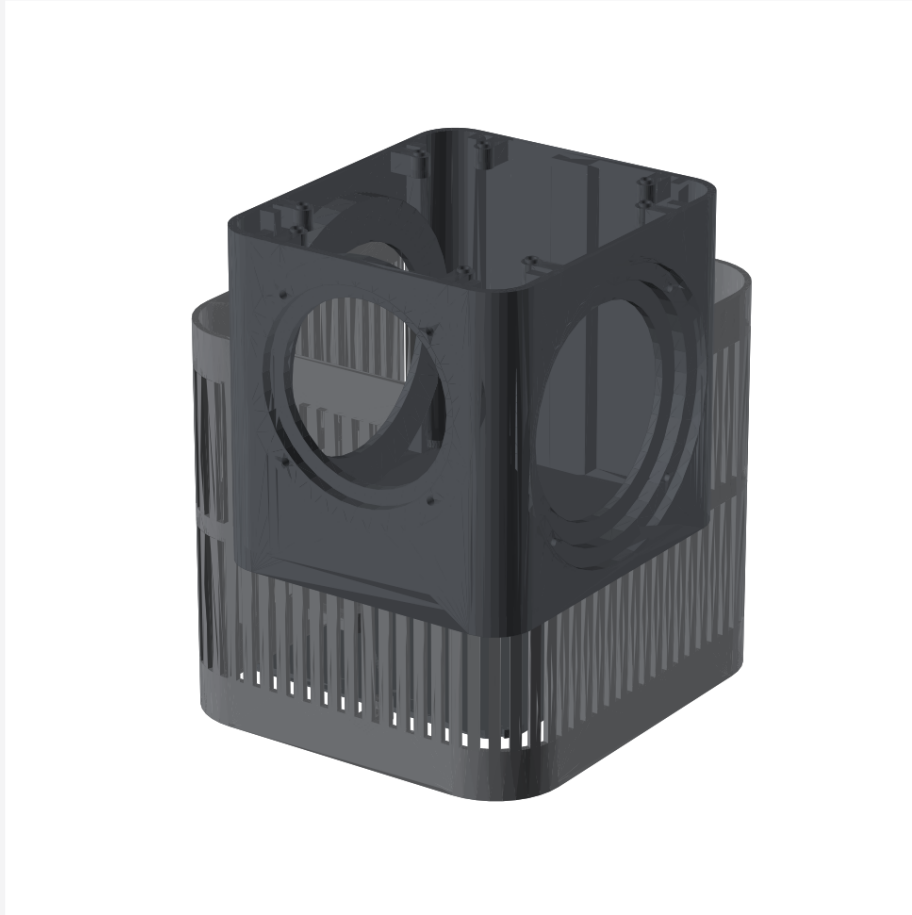

FRONT = -Y | TOP = +Z | units: mm

Step 7 - Install and lock the outer shell

Step 8: Install the shroud and official Batch 1 upper stack

- Parts: electronics_shroud; official mid-plate, threads, PCB spacer, HAT/Core, top plate, buttons/diffuser, lock ring
- Fasteners: F01 and F02
- Tools: 2.0 mm hex; ESD-safe bench
- Gasket/seal: none; electronics bay is outside the acoustic chamber
- Action: Bolt the shroud to its four outboard bosses with F02. Seat the official mid-plate on the four measured divider bosses and install F01. Assemble the official Batch 1 PCB spacer, HAT/Core, top plate, buttons/diffuser, and lock ring in the official order. Connect the keyed JST-XH speaker plug before the top closes.
- Pass: Mid-plate sits on all four bosses; USB-C remains reachable; cable has service slack and cannot enter a moving-part envelope; buttons click and diffuser/LED apertures remain clear.
- Warning: Core placement is REQUIRES_PHYSICAL_VALIDATION. Follow the official Batch 1 instructions and stop at any collision; do not improvise a transform from the CAD envelope.

Assembly stage 8

Mount the official mid-plate to the measured four-point interface; preserve USB-C.



FRONT = -Y | TOP = +Z | units: mm

Step 8 - Install the shroud and official Batch 1 upper stack

Step 9: Fit the anti-slip ring and complete inspection

- Parts: anti_slip_ring; complete assembly
- Fasteners: none
- Tools: hands; flashlight
- Gasket/seal: inspect G01-G04
- Action: Stretch the TPU ring evenly around the bottom rim. Set the unit upright and inspect all seams, fastener heads, slots, cable exits, buttons, and moving components.
- Pass: Unit stands without rocking; no rattle is heard during gentle handling; every fastener is present and every seal is continuously compressed.
- Warning: Do not power the unit until the commissioning checklist is ready.

Assembly stage 9

Final inspection: all seams even, all openings clear, no loose hardware.



FRONT = -Y | TOP = +Z | units: mm

Step 9 - Fit the anti-slip ring and complete inspection

Source commit 45cfb9dd3357. No physical validation has been performed.