

Implementation and Verification of a CAN/CAN FD Protocol Controller in VHDL

Mads Richardt (s224948)

May 18, 2026

Abstract

This thesis describes the design, implementation, and verification of a CAN/CAN FD protocol controller in VHDL, targeting high-reliability engine controller applications at Everllence. The controller complies with ISO 11898-1 and supports the CB, CE, FB, and FE frame formats with dual bit rate switching and Transmitter Delay Compensation (TDC) for the FD data phase. The design is structured around the ISO 11898-1 layered reference model, with the MAC, PCS, and FCE sub-layers implemented as independently testable modules and the LLC sub-layer specified but deferred. Of 38 derived requirements, 27 are verified against passing testbenches or code inspection. Of the remaining 11, eight fall outside the current scope pending `can_llc` integration, one is a lower-priority optional feature, and two represent identified future work: [REQ-021](#) (error-injection under passive error conditions) and [REQ-034](#) sub-claim 1 (lone-node bus re-integration). The design was synthesized on a Cyclone 10 LP FPGA target, using 4,608 logic elements (30% of device) with a worst-case fmax of approximately 127 MHz.

Approval

This thesis was prepared at the Department of Applied Mathematics and Computer Science (DTU Compute), Technical University of Denmark, in partial fulfilment of the requirements for the degree of Bachelor of Science in Engineering. The work was carried out in collaboration with Everllence, where the controller is intended for use in high-reliability engine controller applications.

It is assumed that the reader has a working knowledge of digital logic design and binary communication protocols. Familiarity with VHDL or a similar hardware description language is an advantage but is not strictly required to follow the architectural and verification discussions.

Mads Richardt (s224948)

Kgs. Lyngby, May 2026

Acknowledgements

Edward Alexandru Todirica, Associate Professor, DTU Compute. Thank you for supervision throughout the project and for valuable guidance and feedback.

Fredrik Kristensen, Everllence. Thank you for guidance throughout the project, code and report review, and feedback on the design and implementation.

Alex Fihl Hedegaard Nielsen, Everllence. Thank you for the sparring and advice, good company - and the many coffee machine trips that kept the work moving.

Contents

Approval	2
Acknowledgements	3
Abbreviations	7
List of Figures	9
Reading Guide	11
1 Introduction	12
1.1 Motivation	12
1.2 Existing CAN Controller	12
1.2.1 Limitations	12
1.2.2 Decision to Redesign	13
1.3 Existing CAN FD IP Cores	13
1.3.1 Open-Source Implementations	13
1.3.2 Commercial Implementations	13
1.3.3 Rationale for In-House Development	14
1.4 Problem Statement	15
1.5 Objectives	15
2 Background	15
2.1 CAN Classic	15
2.2 CAN FD	16
3 Requirements	17
3.1 Code Standard, Tooling, and Design Constraints	17
3.1.1 Tools and Language	17
3.1.2 Integration Requirements	17
3.1.3 VHDL Code Standard	17
3.2 From Specification to Structured Requirements	18
3.3 AI-Assisted Extraction: Utility and Limitations	19
4 CAN and CAN FD Protocol Overview	21
4.1 Layered Reference Model	21
4.2 Frame Types and Formats	22
4.3 Bit Timing	22
4.3.1 Synchronization	24
4.3.2 Transmitter Delay Compensation	24
4.4 Bit Stuffing	25
4.5 Cyclic Redundancy Check	25
4.6 Error Detection and Fault Confinement	25
5 Verification Plan	26
5.1 Layer	26
5.2 Side	27

5.3	Format Applicability	27
5.4	Observability	27
5.5	Requirement Distribution	27
5.6	Verification Plan Data Structure	28
5.6.1	Verification Method	29
5.6.2	Traceability: Label and File	29
5.6.3	Status	29
6	Design and Architecture	29
6.1	Adopting the ISO 11898-1 Sub-layer Model	29
6.2	Combined vs. Separated TX/RX Paths	30
6.3	Per-Field FSM Granularity	30
6.4	LLC Frame Format	30
6.4.1	Host-LLC Interface Format	30
6.4.2	Internal LLC Frame Format	30
6.5	System Overview	31
7	Implementation	32
7.1	Interface Conventions	32
7.2	can_mac_fsm	33
7.2.1	FSM Structure and Mode Flag	33
7.2.2	TX Mode: Frame Transmission	33
7.2.3	RX Mode: Frame Reception	33
7.2.4	Error-Frame States	35
7.3	can_mac_ser	35
7.4	can_mac_bs	35
7.5	can_mac_crc	36
7.6	can_fce	37
7.7	can_pcs	39
7.7.1	Resynchronization	39
7.7.2	Dual Bit Rate Switching	39
7.7.3	Transmitter Delay Compensation	39
8	Verification and Results	41
8.1	Testbench Results Summary	44
9	Synthesis	44
9.1	Resource Utilization	44
9.2	Timing Results	45
10	Discussion	45
10.1	Objectives Assessment	47
10.2	Future Work	47
11	Conclusion	48
12	References	49

A	Accompanying Digital Materials	50
B	Complete CAN Node Signal Interface	50
C	Verification Plan	53

Abbreviations

Table 1: Abbreviations used in this report.

Abbreviation	Meaning
ACK	Acknowledgment
AD	ACK Delimiter
AEF	Active Error Flag
AI	Artificial Intelligence
BRS	Bit Rate Switch
CAN	Controller Area Network
CANH	CAN High bus wire
CANL	CAN Low bus wire
CB	Classic Base (frame format)
CBFF	Classic Base Frame Format
CC	CAN Classic
CD	CRC Delimiter
CE	Classic Extended (frame format)
CEFF	Classic Extended Frame Format
CRC	Cyclic Redundancy Check
DF	Data Frame
DLC	Data Length Code
DMA	Direct Memory Access
DUT	Device Under Test
ED	Error Delimiter
EOF	End of Frame
ESI	Error State Indicator
FB	FD Base (frame format)
FBFF	FD Base Frame Format
FCE	Fault Confinement Entity
FD	Flexible Data Rate
FDF	FD Frame bit
FE	FD Extended (frame format)
FEFF	FD Extended Frame Format
FPGA	Field-Programmable Gate Array
FSB	Fixed Stuff Bit
FSM	Finite State Machine
FTYP	Frame Type
HDL	Hardware Description Language
IDB	Identifier Base field (11-bit base ID)
IDE	Identifier Extension bit
IEXT	Identifier Extension field (18-bit extended ID)
IFS	Inter Frame Space
INT	Intermission
IP	Intellectual Property

Abbreviation	Meaning
ISO	International Organization for Standardization
LLC	Logical Link Control
LLM	Large Language Model
MAC	Medium Access Control
MIT	Massachusetts Institute of Technology (license)
MSB	Most Significant Bit
OD	Overload Delimiter
OF	Overload Flag
OSVVM	Open Source VHDL Verification Methodology
PCS	Physical Coding Sublayer
PE	Phase Error
PEF	Passive Error Flag
PS	Propagation Segment (PROP_SEG)
PS1	Phase Segment 1 (PHASE_SEG1)
PS2	Phase Segment 2 (PHASE_SEG2)
RF	Remote Frame
RRS	Reserved Remote Request Substitution bit (FD frames)
RTL	Register Transfer Level
RTR	Remote Transmission Request
RX	Receiver / Receive
SB	Stuff Bit
SBC	Stuff Bit Count
SJW	Synchronization Jump Width
SOF	Start of Frame
SP	Sample Point
SRR	Substitute Remote Request
SS	Sync Segment (SYNC_SEG)
SSP	Secondary Sample Point
ST	Suspend Transmission
TDC	Transmitter Delay Compensation
TEC/REC	Transmit Error Counter / Receive Error Counter
TQ	Time Quantum
TX	Transmitter / Transmit

List of Figures

1	Four CAN nodes connected to a shared twisted-wire bus via CANH and CANL conductors. Each node comprises an application process, a CAN controller, and a transceiver IC. The bus is terminated with 120Ω resistors at each end.	16
2	Pipeline generating the <code>verification_plan.toml</code> artifact from the ISO 11898-1 standard.	18
3	ISO 11898-1 CAN node reference model showing the LLC, MAC, PCS sub-layers and cross-cutting FCE.	21
4	CAN frame formats (CB, CE, FB, FE) and the error and overload flags, with field widths annotated per ISO 11898-1. The bus waveform below each format indicates the level of fixed-polarity protocol bits. Hatched regions indicate variable-content fields.	23
5	CAN bit time segments (SS, PS, PS1, PS2) and Sample Point (SP). The two-node layout illustrates the round-trip propagation delay ($t_{\text{TRX}} + t_{\text{bus}}$ each way) that PS must cover for correct arbitration.	24
6	Resynchronization over two successive sync edges. PE is the phase error relative to SS. SJW is the Synchronization Jump Width.	24
7	Transmitter Delay Compensation. Top: the first data-phase bits have no valid SSP while the loopback is still in transit. Once the loopback returns, the SSP is placed at the measured transceiver delay plus a programmable offset, firing before the SP in each bit time. Bottom: the transceiver delay is measured from when the res bit goes dominant on TX to when the edge arrives on RX.	25
8	Dynamic and fixed bit-stuffing examples showing stuff bit placement for both encoding modes. The waveform below each row shows the resulting bus signal.	25
9	LLC frame format (71 bytes) at the host-LLC interface, with identifier byte mapping for base and extended IDs.	31
10	Internal LLC frame format at the <code>can_mac_ser</code> input, with identifier byte mapping for base and extended IDs.	31
11	Implementation module decomposition showing the five entities and their inter-module connections.	32
12	<code>can_mac_fsm</code> (19 states) controlling TX and RX for all in-scope frame formats. Arbitration loss clears <code>is_transmitter</code> in place without a state transition.	34
13	<code>can_mac_ser</code> FSM (four states) serializing the internal LLC frame to the MAC bit stream. Unused padding bits in the 32-bit ID field are skipped silently.	36
14	<code>can_mac_bs</code> operating in dynamic and fixed stuffing modes. A pending dynamic stuff bit at the rising edge of <code>fsb_en</code> is promoted to the initial FSB rather than suppressed.	37
15	<code>can_mac_crc</code> dataflow with three parallel CRC engines. The output mux is combinatorial to satisfy the ISO $\text{IPT} \leq 2 t_q$ constraint at minimum prescaler.	38
16	<code>can_fce</code> FSM governing the error active, error passive, and bus off node states per ISO 11898-1 sec. 8.1.4.4.	38
17	<code>can_pcs</code> bit-time FSM with concurrent resynchronization and TDC pipelines per ISO 11898-1 sec. 7.2-7.4.	40
18	<code>can_mac_pcs_fce_tb</code> integration testbench. Two <code>can_mac_pcs_fce</code> instances connect through a dominant-wins bus model. Avalon-ST VCs drive and sample the MAC interfaces. <code>p_test_ctrl</code> sequences test stimuli, injects bit errors via <code>dut_1_rx_recessive</code> , and reads pass/fail status from the TX-status and bus-off monitors.	41

19	Two-node simulation of a complete FD frame in <code>can_mac_pcs_fce_tb</code> , showing the full field sequence from <code>s_arbitration</code> through <code>s_eof</code> on both transmitter and receiver. Secondary sample point pulses confirm TDC is active during the data phase. Resynchronization events are visible on DUT 2 via <code>sync_applied</code>	42
20	Dynamic and fixed bit stuffing in <code>can_mac_pcs_fce_tb</code> . Dynamic stuff bits are inserted at A, B, and C in the <code>s_data</code> region. At D, <code>fixed_bit_stuffing_en</code> asserts and the stuffer switches to fixed mode for <code>s_sbc</code> and <code>s_crc</code> . Seven fixed stuff bits are inserted between D and E.	42
21	Dual bit rate switching and TDC measurement in <code>can_mac_pcs_fce_tb</code> . At A, the PCS begins counting the transceiver loopback delay in TQ increments. At B, the transmitted bit arrives on RX and the count stops at 19 TQ. At C, the first data-phase bit (ESI) is transmitted and the measured delay is counted down. When the countdown terminates at D, the SSP strobe activates and the TDC delay of 2 is signaled to the MAC. <code>next_bit_is_res</code> and <code>next_bit_is_brs</code> control the measurement window. <code>data_phase_stop</code> signals the end of the data phase.	42
22	Arbitration loss in <code>can_mac_pcs_fce_tb</code> . Both nodes enter <code>s_arbitration</code> as transmitters at A. DUT 1 loses arbitration at B after transmitting recessive and sampling dominant, and continues as receiver with <code>is_transmitter</code> cleared.	43
23	Error frame escalation in <code>can_mac_pcs_fce_tb</code> . A bit error on the SOF bit triggers the first error flag at A, incrementing TEC to 8. Each dominant bit of the error flag is also sampled as a bit error (bus held recessive), rapidly escalating TEC. At B, TEC reaches 128 and <code>fce_state</code> transitions to <code>s_error_passive</code> . At C, the node enters <code>s_suspend_transmission</code> after <code>s_intermission</code>	43
24	Bus-off recovery in <code>can_mac_pcs_fce_tb</code> . DUT 1 transmits the first active error flag at A. At B, TEC reaches 128 and the node transitions to error passive. At C, TEC reaches 256 and the node enters bus off. The FCE counts 128 idle condition strobes from the PCS and restores <code>s_error_active</code> at D. At E and F, DUT 2 acknowledges the first two frames transmitted after recovery.	43
25	Complete CAN node signal-level connectivity. The MAC sub-layer is expanded to show its four internal entities. The LLC interface block is the Avalon-ST boundary to the pending LLC implementation.	52

Reading Guide

The report is structured in two parts. The first establishes context: the Introduction motivates the project and states the objectives; the Background (Section [2](#)) and Protocol Overview (Section [4](#)) provide technical foundations on CAN and CAN FD. The second part is the technical contribution: Requirements, Verification Plan, Design and Architecture, Implementation, Verification and Results, and Synthesis form the core chapters, followed by Discussion and Conclusion.

Readers familiar with CAN and CAN FD may skip Section [2.1](#), Section [2.2](#), and Section [4](#).

Source files, testbenches, verification plan, and tooling accompanying this document are listed in Section [A](#).

1 Introduction

Industrial control systems for large marine engines demand communication protocols that combine fault tolerance, multi-master arbitration, and multi-decade service reliability. The Controller Area Network (CAN) meets these demands, but as control system data requirements grow the bandwidth and payload limits of CAN Classic have become a bottleneck.

1.1 Motivation

Everllence (formerly MAN Energy Solutions) is a provider of propulsion and decarbonization solutions for the marine and energy industries, designing large two-stroke and four-stroke combustion engines for ship propulsion and power generation. This thesis was written within the engine controller division, where FPGA-based control hardware is developed and maintained for integration into Everllence's engine platforms.

CAN, developed in the 1980s for automotive and industrial control, provides the fault-confinement properties that suit the reliability requirements of engine control applications [1]. Everllence's existing CAN infrastructure is built around a CAN Classic protocol controller deployed on an IO-extender board forming part of the Triton motor controller system. As control systems grow more data-intensive, the eight-byte payload and 1 Mbit/s ceiling of CAN Classic has become a practical constraint. CAN FD (Flexible Data Rate) extends the maximum payload to 64 bytes and raises the data-phase bit rate beyond 8 Mbit/s while preserving the CAN Classic arbitration and fault-confinement architecture [2]. Thus, CAN FD is the natural migration path for Everllence's existing CAN infrastructure .

1.2 Existing CAN Controller

The starting point for this project is an existing CAN Classic controller developed internally at Everllence. The controller is implemented in VHDL and has been integrated into a production IO-extender FPGA design. It supports CAN Classic frames with both 11-bit (base) and 29-bit (extended) identifiers at bit rates up to 500 kbit/s, and has been verified through hardware bring-up on physical CAN buses. The initial version was developed by the author of the present document during an internship at Everllence and has since been extensively modified by other engineers at the company.

The top-level wrapper for the module instantiates a combined TX/RX frame FSM, a bit timing generator, a dynamic bit stuffer, a CRC-15 engine, and two Avalon-ST converters for frame serialization and deserialization.

The central component is the orchestrating FSM that handles both transmission and reception in a single process. It manages frame arbitration, bit-level TX and RX, stuff-bit error checking, CRC validation, ACK handling, and error flag generation. Fault confinement (error active, error passive, bus off node state transition) is handled in a separate process within the main FSM entity.

1.2.1 Limitations

While the existing controller is functional for CAN Classic, several areas of the existing design would require significant rework to support CAN FD.

Single bit rate domain. CAN FD requires switching between a nominal bit rate (used during the arbitration phase) and a faster data bit rate (used during the data phase), with Transmitter Delay Compensation (TDC)

to account for the transceiver loop delay at the higher rate (Section 4.3). Adding dual bit rate support and TDC would require a fundamental redesign of the timing architecture.

Dynamic bit stuffing only. The bit stuffer implements the CAN Classic rule of inserting an inverse bit after five consecutive identical bits. CAN FD introduces a second stuffing mode - fixed bit stuffing - where a stuff bit is inserted at fixed intervals during the CRC field, and a Stuff Bit Count (SBC) field with Gray-coded parity is appended (Section 4.4). The existing stuffer has no mechanism for mode switching or SBC generation.

Single CRC engine. The controller has a single CRC engine. CAN FD requires three polynomials - CRC-15 for Classic frames, CRC-17 for FD frames with payloads up to 16 bytes, and CRC-21 for larger payloads (Section 4.5). A compliant receiver must run all three engines in parallel, since the correct polynomial depends on DLC and is not known until the control field is decoded. The data feed also differs between Classic and FD frames, requiring separate accumulation paths.

Coupled fault confinement. Error counting (TEC/REC) and node state transitions are implemented in the same source file as the frame FSM, with no clean sub-layer boundary between them (Section 4.6). ISO 11898-1 defines fault confinement as a distinct cross-cutting entity, and separating it as an independently testable module both conforms closer to the standard's reference model (Section 4.1) and simplifies verification.

Format-dependent frame structure. CAN Classic and CAN FD frames diverge in the control and data phases, where FD introduces format-specific fields with no Classic equivalent (Section 4.2). The existing FSM has no clean mechanism to handle this divergence across four frame variants.

1.2.2 Decision to Redesign

The rework required across bit timing, bit stuffing, CRC, and frame format complexity is large enough to justify a clean-slate redesign structured around the ISO 11898-1 layered architecture (LLC, MAC, PCS, FCE, Section 4.1) with independently testable subcomponents, rather than retrofitting FD support onto a design not originally built with those boundaries.

1.3 Existing CAN FD IP Cores

Before committing to an in-house redesign, the available CAN FD controller IP cores were evaluated. Table 2 summarizes the candidates, spanning both open-source and commercial offerings.

1.3.1 Open-Source Implementations

CTU CAN FD [3] is the only mature open-source CAN FD controller available as synthesizable HDL. Developed at the Czech Technical University in Prague, it is written in VHDL, licensed under MIT, and has been conformance-tested against ISO 16845-1 [4]. The controller includes a full TX and RX pipeline with up to four TX buffers, acceptance filtering, timestamping, and a register interface with DMA support.

1.3.2 Commercial Implementations

Bosch M_CAN [5] is the reference CAN FD controller developed by Bosch. M_CAN is the IP core embedded in most automotive micro controllers. It is licensed under a non-disclosure agreement with per-design royalty fees.

AMD/Xilinx CAN FD [6] is a soft IP core included in the Vivado Design Suite. It provides an AXI4-Lite register interface with up to 32 acceptance filters, TX mailboxes, and RX FIFOs. It is device-locked to

AMD/Xilinx FPGAs and cannot be ported to other targets.

Technology-independent RTL cores. CAST CAN FD [7] is a technology-independent CAN FD IP core licensed per-design with an upfront fee. Major EDA vendors including Synopsys (DesignWare) and Cadence offer similar ASIC-targeted cores under commercial licensing programs.

Table 2: Survey of available CAN FD controller IP cores.

Implementation	Source	License	Scope	Conformance Tested
CTU CAN FD [3]	VHDL (MIT)	MIT	Full node	Yes
Bosch M_CAN [5]	Closed	Per-design royalty	Full node	Yes (reference)
AMD CAN FD [6]	Closed	Vivado-included	Full node	Yes
CAST CAN FD [7]	Closed	Per-design fee	Full node	Yes

1.3.3 Rationale for In-House Development

None of these solutions satisfies Everllence’s combined requirements for safety-critical marine engine control. The disqualifying factors span IP ownership, verification authority, architectural scope, integration with existing infrastructure, and platform independence - each addressed in turn below.

IP ownership and supply chain independence. Everllence’s engine controllers carry service commitments of up to thirty years. Commercial IP cores introduce a licensing dependency on an external vendor over that full horizon - vendors may discontinue support, change licensing terms, or be acquired. Owning the RTL outright eliminates this exposure and ensures that the design can be maintained, ported, and modified without third-party approval for the full product lifetime. The open-source CTU CAN FD avoids the licensing risk, but using it still means adopting a codebase whose architecture, naming conventions, and design decisions were made for a different context.

Verification authority. In safety-critical domains, the verification evidence must be traceable from standard requirements to RTL assertions and testbench results. Adopting a third-party core means inheriting its verification artifacts rather than producing them. Everllence’s verification methodology requires full control over the verification plan, the testbench architecture, and the assertion coverage.

Architectural scope. All available IP cores implement a complete CAN node - TX and RX pipelines, message memory, acceptance filtering, buffer management, register interfaces, and in some cases DMA controllers. Everllence’s application requires only the protocol engine - the module that converts between byte-level frame data and the serial bus - which is exactly the scope of the existing CAN Classic controller. The higher-level buffering and filtering logic already exists in Everllence’s FPGA infrastructure. Adopting a full-node IP core would introduce unnecessary complexity and area overhead, and stripping the unused subsystems to fit the existing architecture offsets the benefit of using a pre-built core.

Integration with existing infrastructure. Everllence’s FPGA designs use a specific Avalon-ST streaming interface for inter-module communication and established conventions for signal naming and module boundaries. A third-party core would require an adaptation layer to bridge its native interface to the existing infrastructure. The in-house design uses Everllence’s interface conventions natively, eliminating this integration overhead.

Platform independence. The AMD/Xilinx CAN FD core is locked to Xilinx devices. The Bosch M_CAN and other commercial cores are delivered as technology-specific netlists or encrypted HDL for a particular

target. The in-house design is written in portable VHDL-93, synthesizable on any FPGA platform ensuring that the IP remains usable if Everllence changes FPGA vendors.

1.4 Problem Statement

The architectural limitations of the existing controller (Section 1.2.1) and the unsuitability of available third-party IP cores (Section 1.3.3) together motivate a clean-slate CAN FD protocol controller conforming to ISO 11898-1. No existing solution combines full IP ownership, a targeted data-link-layer scope matching Everllence’s integration requirements, and native compatibility with Everllence’s Avalon-ST interface conventions and VHDL Code Standard. The design described in this report addresses that gap directly.

1.5 Objectives

1. Implement a CAN/CAN FD protocol controller in VHDL, compliant with ISO 11898-1 [8].
2. Establish a structured requirements framework with traceability from ISO 11898-1 to testbench evidence, covering all implemented modules.
3. Produce an RTL design integrated via Avalon-ST interfaces into Everllence’s existing FPGA infrastructure.

2 Background

This section covers the CAN and CAN FD protocol at the level of motivation and architecture - the bus model, fault-confinement properties, and the bandwidth extensions introduced by CAN FD.

2.1 CAN Classic

CAN is a serial communication bus developed by Bosch in 1986 [1] to connect electronic control units in automotive environments without a central host computer. CAN uses a shared two-wire differential bus on which all nodes broadcast simultaneously and arbitrate access without any designated bus master. Any node may initiate a transmission at any time. Contention is resolved by a non-destructive bitwise arbitration in which the transmitter with the lower-priority identifier detects the collision and silently withdraws, leaving the winner’s frame intact. The bus uses two conductors, CANH and CANL, whose voltage difference encodes the bit value, see Figure 1. Twisting the conductors ensures that external electromagnetic interference couples equally onto both wires. Because the receiver measures only the differential voltage, this common-mode noise cancels - a practical necessity in the electrically harsh environment.

CAN’s error-handling architecture is a distinguishing feature relative to simpler serial protocols. Five complementary error detection mechanisms operate concurrently on every transmitted frame: transmitter bit monitoring, frame format checking, cyclic redundancy checking, acknowledgment checking, and bit stuffing violation detection. The residual error probability - the probability that a corrupted frame passes all detection mechanisms undetected - for an eight-byte frame in a ten-node network is on the order of 10^{-9} per frame, several orders of magnitude lower than contemporary automotive bus alternatives such as VAN and SCP [9]. A fault confinement mechanism tracks each node’s error history and automatically escalates from error active through error passive to bus off, electrically isolating a persistently faulty node from the bus without disrupting communication between healthy nodes. Together these properties made CAN the protocol of choice for safety-relevant in-vehicle networks.

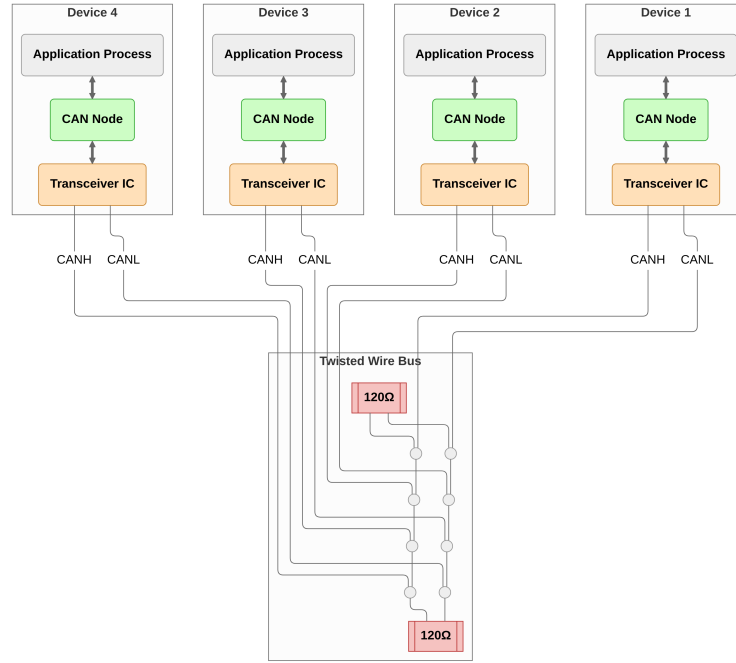


Figure 1: Four CAN nodes connected to a shared twisted-wire bus via CANH and CANL conductors. Each node comprises an application process, a CAN controller, and a transceiver IC. The bus is terminated with 120Ω resistors at each end.

2.2 CAN FD

The fault-confinement and multi-master properties that distinguished CAN from its contemporaries were deliberately preserved in CAN FD. The CAN FD protocol extension was introduced by Bosch in 2012 and incorporated in ISO 11898-1 in 2015. The design goal was to extend payload and bit rate while leaving the arbitration and fault-confinement architecture unchanged [2].

CAN's original data payload was capped at eight bytes per frame, limiting raw throughput to around 1 Mbit/s. As embedded control applications became more data-intensive, this ceiling became a practical constraint. CAN FD extends the maximum payload to 64 bytes and introduces a separate higher-speed data phase with bit rates of 8 Mbit/s or beyond, while preserving the CAN Classic arbitration phase and the fault-confinement architecture unchanged.

At high data-phase bit rates the transceiver's TX-to-RX loop delay (approximately 100 ns for a typical CAN FD transceiver such as the TCAN1042 [10]) may exceed one bit time. Since the fault confinement mechanism in CAN relies on transmitter nodes monitoring their own transmitted bits, this necessitates the Transmitter Delay Compensation (TDC) mechanism introduced in CAN FD, see Section 4.3. For data-phase to arbitration-phase bit rate ratios below approximately 9, CAN FD accepts the same oscillator tolerance as CAN Classic [11].

CAN FD also strengthens the error detection architecture. A CRC polynomial's Hamming distance guarantee holds only up to a certain frame length, making the CAN Classic CRC-15 insufficient for CAN FD's longer payloads. A 17-bit polynomial covers frames up to 16 data bytes and a 21-bit polynomial covers frames up to 64 bytes, both maintaining a Hamming distance of 6 - meaning any combination of five or fewer bit errors within a frame is guaranteed to be detected [2]. In CAN Classic, dynamic stuff bits are excluded from the CRC calculation, allowing errors that create or destroy stuff conditions to escape detection. CAN FD addresses this by including dynamic stuff bits in the CRC data feed and introducing the Stuff Bit

Count (SBC) field as an independent check on the number of dynamic stuff bits. Together, these changes significantly reduce the residual error probability compared to CAN Classic [12].

3 Requirements

This section establishes the constraints that bound the design before any architectural decisions are made. Everllence’s coding standard, tooling, and existing FPGA infrastructure set the implementation framework, while the protocol requirements derived from ISO 11898-1 define the functional obligations of the controller.

3.1 Code Standard, Tooling, and Design Constraints

These constraints fall into three categories: the tools and language dictated by Everllence’s synthesis and simulation environment, the integration requirements specific to this project, and the coding rules from Everllence’s VHDL Code Standard.

3.1.1 Tools and Language

The RTL source is implemented in VHDL-93. Everllence’s synthesis toolchain uses Quartus Prime [13], which does not fully support VHDL-2008 constructs in synthesis, making VHDL-93 the practical upper bound for synthesizable RTL. Testbenches are written in VHDL-2008 to support the OSVVM verification framework [14], which requires VHDL-2008 language features. SystemVerilog with UVM is the dominant industry alternative for RTL implementation and verification at this scale. The choice here follows company convention rather than a project-level technical comparison. Riviera-PRO [15] is used for simulation. Sigasi [16] is used for linting and language-aware editing. Waveform figures are captured in GTKWave [17], timing diagrams are drawn in WaveDrom [18], and architecture diagrams in Mermaid [19].

Claude Code [20] was used for prose editing and VHDL review. Technical content, design decisions, and all source files are the author’s own work.

3.1.2 Integration Requirements

1. **Avalon-ST user interface:** The CAN controller’s external interface to the host system must use the Avalon-ST streaming protocol [21] (data, valid, ready, sop, eop). The requirement applies specifically to the boundary between the CAN controller and its user.
2. **IP library CRC block:** Everllence maintains a reusable, parameterised CRC generator (`gen_crc`) in its IP library. This module must be used for all CRC computations.

3.1.3 VHDL Code Standard

1. **Entity port types:** Entity ports are restricted to `std_logic`, `std_logic_vector`, and records or arrays of these types. Modes are restricted to `in` and `out`.
2. **Naming conventions:** A mandatory prefix/suffix scheme applies to all VHDL identifiers: types (`t_`), constants (`c_`), generics (`gc_`), processes (`p_`), functions (`f_`), packages (`pk_`), state variables (`s_`), entity inputs (`_i`), and entity outputs (`_o`).
3. **RTL design rules:** Synchronous processes must be sensitive to the clock only. Reset must be synchronous and initialize all control registers. FSMs are preferably implemented as single-process designs where all signal assignments are derived from the current state.
4. **Testbench requirements:** Testbenches must follow a black-box testing model and test cases must be ordered as: reset tests first, then a normal-usage test, then all remaining tests.

3.2 From Specification to Structured Requirements

The requirements engineering process addressed two key objectives [22]:

1. Extracting a clear and actionable set of requirements that could serve as a starting point for the design phase.
2. Establishing a clear, traceable link between the ISO 11898-1 specification and the verification environment.

Both objectives are complicated by the source material: normative requirements are distributed across subsections, often restated from different perspectives, and interspersed with explanatory text. The standard compounds this by bundling multiple obligations into single clauses, interspersing normative *shall* statements with informative rationale prose, and repeating equivalent obligations from both transmitter and receiver perspectives.

The AI-augmented pipeline shown in Figure 2 was designed to address these extraction challenges systematically. The first step was converting the ISO 11898-1 PDF to Markdown - a format that can be efficiently searched and ingested by LLMs. The resulting Markdown file was then fed to a Claude Sonnet 4.6 LLM agent, which was prompted to extract all normative statements - sentences containing words like “shall”, “should”, “must”, and their corresponding negations.

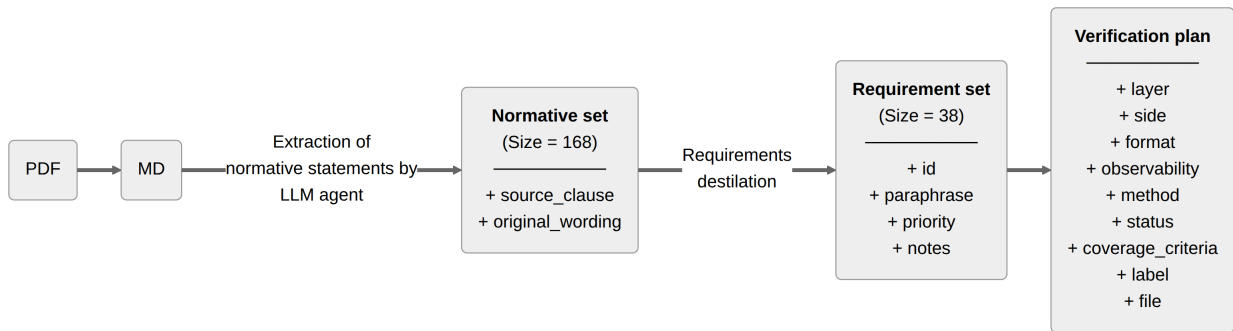


Figure 2: Pipeline generating the `verification_plan.toml` artifact from the ISO 11898-1 standard.

This process yielded a raw set of 168 normative statements linked to the ISO standard sections from which they were extracted. The normative set was then manually reviewed, consolidated, and distilled into a final set of 38 requirements (reproduced in Section C).

The requirements set is stored as a TOML file, one entry per requirement. Direct LLM editing of large structured files is unreliable - prone to silent entry deletion, field hallucination, and syntax corruption. To make iterative AI-assisted refinement of the plan viable, a custom Model Context Protocol (MCP) server was developed alongside it. The server exposes query, insert, update, and delete operations, together with bulk update and statistics utilities, as structured tool calls. Each write operation targets a single requirement entry and validates field values against the schema before committing. This bounds any model error to one requirement and prevents malformed data from reaching the file. Each requirement entry contains the following fields:

- **source_clause:** Links every requirement back to the ISO 11898-1 clause from which it was distilled, enabling the requirements set to be audited against the standard.
- **original_wording:** Verbatim ISO text for the relevant clauses. Preserving the source wording prevents paraphrase drift and provides a fallback for resolving ambiguity during implementation.
- **paraphrase:** A concise, implementer-facing restatement of the requirement. Where the ISO prose

bundles multiple obligations into a single clause, the paraphrase enumerates them as numbered sub-claims, each independently verifiable.

- **priority:** A three-level rating - P1 (need-to-have, derived from “shall” obligations and core correctness), P2 (verified in the normal cycle), or P3 (optional, derived from “should” clauses or implementation-dependent features). The priority drove the implementation sequence and scope decisions when the schedule was constrained.
- **notes:** Any residual clarifications not captured by the paraphrase - implementation constraints, out-of-scope markers, or known ambiguities. May be empty.

Of the 38 requirements, 32 are rated P1, four are P2, and two are P3. Each non-P1 rating reflects a deliberate scoping decision - the rationale for each is given in Table 3.

Table 3: Priority demotion rationale for all requirements not rated P1.

ID	Topic	Priority	Demotion rationale
REQ-002	LLC TX request and abort timing	P2	The 2-SOF processing window is a responsiveness guarantee, not a correctness constraint. A node that transmits eventually but outside this window sends valid frames.
REQ-011	Remote frame	P2	A data-only node is a valid CAN implementation. Remote frame support is a distinct feature subset not required for basic interoperability.
REQ-015	ESI bit transmission	P2	ESI communicates the node’s error state as an informational signal. Incorrect ESI does not abort a frame or trigger a protocol error at any receiver.
REQ-036	Error signaling enable	P2	Error signaling itself is covered by P1 requirements. This requirement concerns only the existence of a configurable disable mode, which is an optional operational feature.
REQ-004	Frame acceptance filtering	P3	ISO uses advisory “should” language. Also, acceptance filtering is absent from the existing controller, so no regression concerns. The only protocol-relevant filter - suppressing loopback of transmitted frames - is covered by the design.
REQ-037	DLC padding	P3	Padding with 0xCC applies only when the implementation exposes a configurable maximum-data-byte restriction. The feature may be waived entirely if that restriction is not implemented.

3.3 AI-Assisted Extraction: Utility and Limitations

The AI-assisted workflow delivered value in two distinct phases of the project, with very different characteristics in each.

In the extraction phase, the LLM agent earned its keep by bootstrapping and linking the initial normative statement set. Having a fully populated and linked starting point - even one requiring substantial revision - gave the manual review process a concrete artifact to work from. The time saving from the extraction itself was, however, marginal. The agent’s output had to be reviewed statement by statement, which is functionally similar to extracting requirements manually in the first place. The primary benefit of the AI-assisted approach in this phase was therefore not efficiency, but rather the increased consistency of an automated pass over the full standard text.

The distillation step that followed - consolidating 168 raw normative statements into 38 prioritized, independently verifiable requirements - required substantial manual effort that the AI could not replace. Deciding

which statements address the same underlying obligation, how to bound each requirement so that it is independently verifiable, and how to assign priority in a way that is defensible against the standard text are judgment calls that depend on understanding the protocol at an implementation level. [REQ-026](#) illustrates the challenge well - the corresponding extracted normative statements are:

1. *“Only one synchronization within one bit time (between two sample points) shall be allowed. After an edge is detected, synchronizations shall be disabled until the next time the bus state detected at the sample point is recessive.”*
2. *“An edge shall cause synchronization only if the bus state detected at the previous sample point was recessive. If a transmitter uses transmitter delay compensation, also the first detected edge from recessive to dominant after the sample point of the CRC delimiter shall cause synchronization. An edge with a positive phase error shall not cause synchronization in a node sending a dominant bit.”*
3. *“Hard synchronization shall be performed: on edges during inter-frame space (with the exception of the first bit of intermission); when a node is in bus-integration state; at the edge between the FDF bit and the following dominant res bit inside an FD frame; when a node is a receiver of an XL frame, at the edge between the XLF bit and the following dominant resXL bit; at the edge between the DH1 and DH2 bits and the DL1 bit; at the edge between the DAH or AH1 bit and the AL1 bit.”*
4. *“All other recessive-to-dominant edges fulfilling rules a) and b) shall be used for resynchronization with one exception: a node transmitting an FD frame or an XL frame shall not synchronize while it transmits the data phase of that frame.”*
5. *“After a hard synchronization, the bit time shall be restarted with Sync_Seg completed. Hard synchronization shall not be limited by the synchronization jump width.”*
6. *“When the magnitude of the phase error is less than or equal to the synchronization jump width, the effect of a resynchronization shall be the same as a hard synchronization.”*
7. *“When the magnitude of the phase error is larger than the synchronization jump width: if positive, Phase_Seg1 shall be lengthened by the synchronization jump width; if negative, Phase_Seg2 shall be shortened by the synchronization jump width.”*

Statements 3 and 4 each embed CAN XL elements within otherwise in-scope obligations, which must be excluded without dropping the surrounding CB, CE, FB, and FE rules. The remaining statements interleave hard sync and resync rules across four sub-clauses, requiring the two mechanisms to be separated and their interaction made explicit. The resulting paraphrase is presented below, with the remaining requirement fields in [Table 4](#).

Paraphrase:

1. Phase error: the time interval between a recessive-to-dominant edge and the Sync_Seg boundary of the current bit time. Positive when the edge falls after Sync_Seg (late), negative when before (early).
2. SJW (Synchronization Jump Width): the maximum amount by which Phase_Seg1 or Phase_Seg2 may be adjusted per resynchronization.
3. One synchronization per bit time, re-enabled after the next recessive sample point.
4. An edge qualifies only if the previous sample point was recessive and no positive phase error exists while sending dominant. The first recessive-to-dominant edge after the CRC delimiter also qualifies when TDC is active.
5. Hard synchronization: IFS edges (except the first intermission bit), bus-integration state, and the FDF-to-res transition. Bit time restarts with Sync_Seg completed, unconstrained by SJW.
6. All other qualifying edges cause resynchronization, except for the FD data-phase transmitter. Positive error: $\text{Phase_Seg1} += \text{SJW}$. Negative error: $\text{Phase_Seg2} -= \text{SJW}$. Error $\leq \text{SJW}$: same effect as hard

synchronization.

Table 4: REQ-026 distilled from seven extracted normative statements.

Field	Value
ID	REQ-026
Source	§7.3.5.1, §7.3.5.2, §7.3.5.3, §7.3.5.4, Figure 33
Priority	P1
Notes	RTL is stricter than ISO: <code>mac_i.transmitting</code> suppresses all sync unconditionally, not just resync on positive phase error. Safe since the transmitter is the timing source.

The MCP server interface proved genuinely useful throughout the design, implementation, and verification phases that followed extraction. As implementation decisions were made, requirements were refined - paraphrases sharpened, notes extended, observability classifications updated, and traceability fields populated. All updates were applied using the AI agent through dedicated schema-validated MCP tool calls, each targeting an individual requirement field. The narrow, validated interface made incremental AI-assisted maintenance of the verification plan safe and practical across all three project phases.

4 CAN and CAN FD Protocol Overview

The 38 requirements distilled in Section 3 define what must be implemented and verified - but they also function as a structured map to the protocol, since every requirement points to a mechanism that must be understood before implementation can begin. Those mechanisms - the sub-layer model, frame formats, bit timing, stuffing, CRC, and error handling - are covered here, each cross-referenced to the relevant REQ-NNN entries. Readers familiar with ISO 11898-1 may skip to Section 5.

4.1 Layered Reference Model

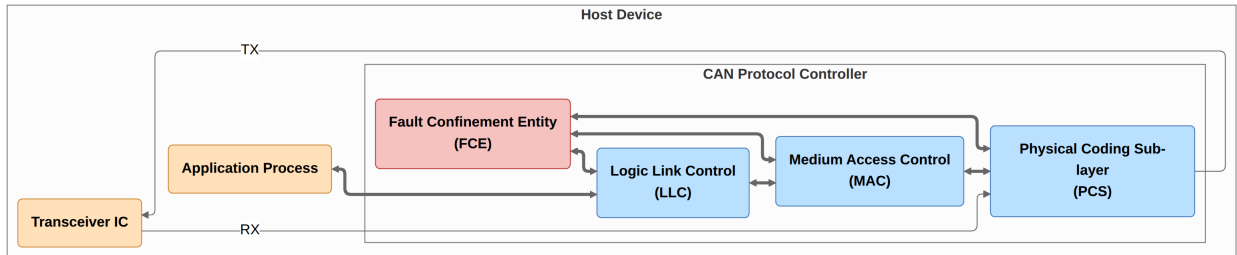


Figure 3: ISO 11898-1 CAN node reference model showing the LLC, MAC, PCS sub-layers and cross-cutting FCE.

ISO 11898-1 structures the CAN node reference model into three functional sub-layers - LLC and MAC in the data link layer, PCS in the physical layer - and a cross-cutting Fault Confinement Entity (FCE) [8, Fig. 4] (see Figure 3):

- **LLC (Logical Link Control):** acceptance filtering [P3, not implemented], overload notification [LLC-requested variant, optional per ISO], and recovery management - retransmission on error or lost arbitration, and supplying frames to the MAC.
- **MAC (Medium Access Control):** encodes and decodes the frame bit-by-bit, performing bit stuffing and destuffing, CRC generation and checking, error detection and signalling, acknowledgment handling, and medium access arbitration.

- **PCS (Physical Coding Sublayer):** bit timing and bus sampling, clock synchronization (including Transmitter Delay Compensation for the FD data phase), and the TX/RX interface to the physical transceiver.
- **FCE (Fault Confinement Entity):** maintains Transmit Error Counter (TEC) and Receive Error Counter (REC), escalating the node's error state from error active through error passive to bus off as error counts accumulate.

4.2 Frame Types and Formats

CAN defines two classes of frames: CAN Classic (CC) and CAN FD (FD). Within each class, frames may carry either an 11-bit base identifier or a 29-bit extended identifier, giving four frame formats: CB (Classic Base), CE (Classic Extended), FB (FD Base), and FE (FD Extended), as shown in Figure 4 and specified in REQ-038. Classic frames (CB and CE) additionally support remote frame variants, giving six bus frame types in total.

A CAN Classic frame opens with a dominant SOF bit that triggers hard synchronization (Section 4.3) in all receiving nodes, followed by the arbitration, control, data, and CRC fields, an ACK slot, and a seven-bit EOF delimiter. The RTR bit is dominant for data frames and recessive for remote frames. The IDE bit distinguishes base frames (dominant, 11-bit ID) from extended frames (recessive, 29-bit ID). Fixed-polarity form bits (SRR, r0, r1) carry no protocol instruction. The DLC encodes the number of data bytes in the payload (REQ-032). The ACK slot carries a dominant bit driven by every receiver that has validated the CRC. Each frame is followed by the interframe space - intermission (INT), suspend transmission (ST, error passive transmitters only), and bus idle (REQ-008).

A CAN FD frame shares the same arbitration phase structure, with the FDF bit signalling the FD format when recessive. The FD control field contains a reserved form bit (res) alongside BRS and ESI. The DLC retains its 4-bit width but uses a non-linear mapping above 8 bytes, extending the maximum payload to 64 bytes (REQ-032). The BRS (Bit Rate Switch) bit controls the transition to the data-phase bit rate: when BRS is recessive the bus switches to the faster data rate immediately after the BRS sample point and returns to the nominal rate at the CRC delimiter (REQ-031). The ESI (Error State Indicator) bit reflects the transmitting node's fault-confinement state: a node in error passive state shall transmit ESI recessive (REQ-015). The FD CRC field is additionally prefixed by a Stuff Bit Count (SBC) - a Gray-coded count of dynamic stuff bits with a parity bit (REQ-016).

4.3 Bit Timing

Every CAN bit period is divided into four non-overlapping time segments measured in Time Quanta (TQ), where one TQ equals the system clock period multiplied by a programmable integer prescaler, see Figure 5. CAN FD extends CAN Classic with an independently configured data-phase bit rate. A CAN FD node therefore maintains two independent sets of segment parameters, one for the nominal rate and one for the data rate (REQ-024):

- **Sync Segment (SS):** one TQ. The segment at which a recessive-to-dominant edge is expected when the node is synchronized.
- **Propagation Segment (PS):** guarantees that a bit driven by any node reaches all others before the sample point, enabling correct arbitration. PS shall be programmed to at least twice the one-way propagation delay: $2 \times (t_{\text{TRX}} + t_{\text{bus}})$, see Figure 5.
- **Phase Segment 1 (PS1):** immediately precedes the sample point. Can be lengthened by the resynchronization mechanism to absorb positive phase errors.

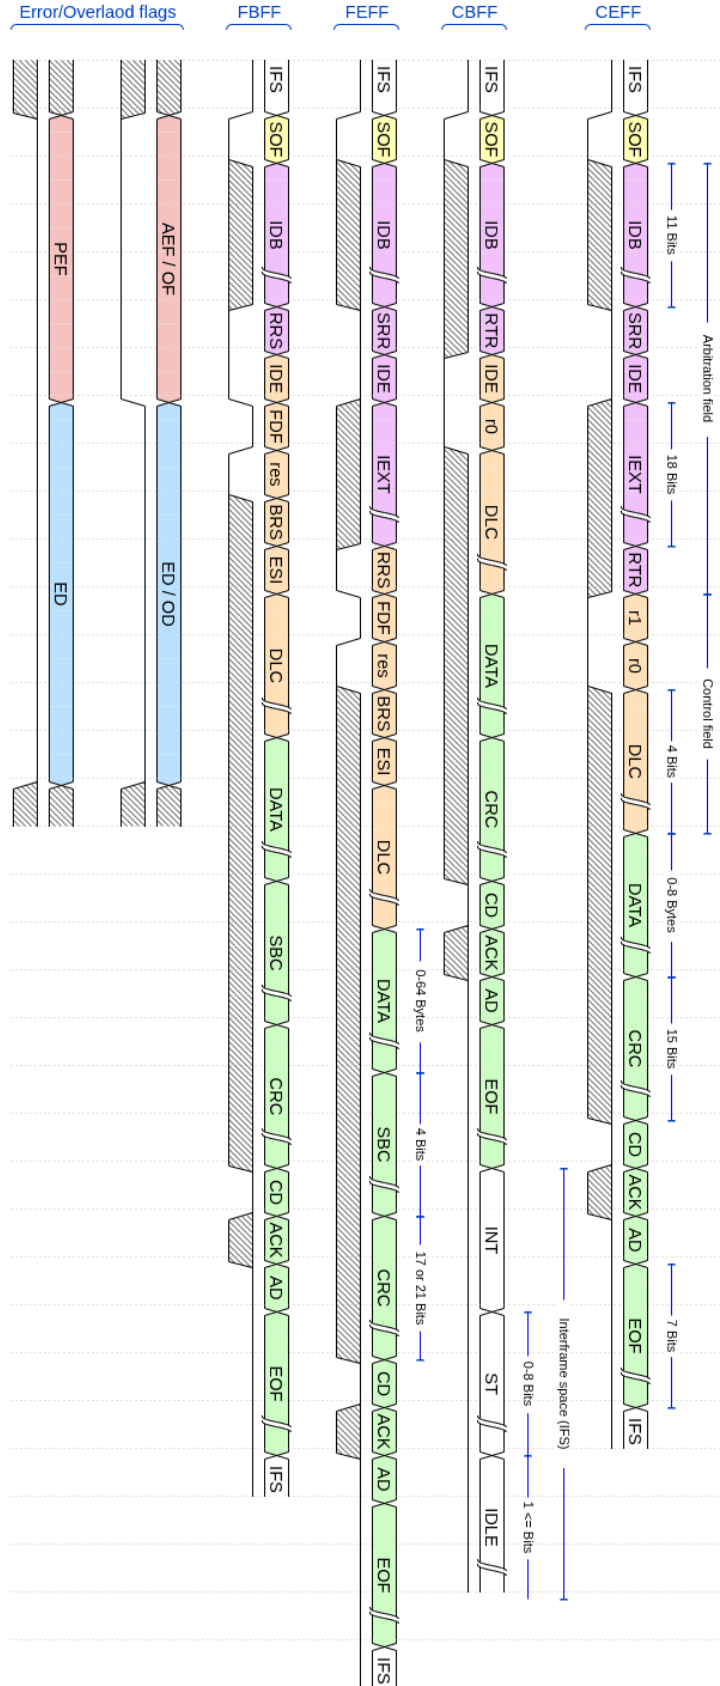


Figure 4: CAN frame formats (CB, CE, FB, FE) and the error and overload flags, with field widths annotated per ISO 11898-1. The bus waveform below each format indicates the level of fixed-polarity protocol bits. Hatched regions indicate variable-content fields.

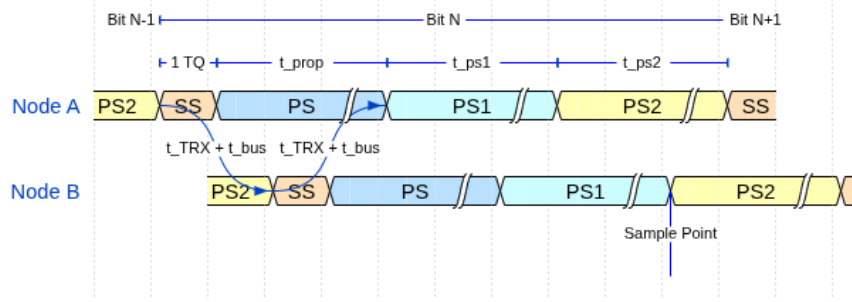


Figure 5: CAN bit time segments (SS, PS, PS1, PS2) and Sample Point (SP). The two-node layout illustrates the round-trip propagation delay ($t_{\text{TRX}} + t_{\text{bus}}$ each way) that PS must cover for correct arbitration.

- **Phase Segment 2 (PS2):** follows the sample point to the end of the bit. Can be shortened to absorb negative phase errors.

The **sample point** falls at the PS1 / PS2 boundary. Every receiver samples the bus exactly once per bit at this point. The sample point position - expressed as a percentage of the total bit time - is a configuration parameter traded off against bus length, node count, and oscillator tolerance.

4.3.1 Synchronization

In a synchronized receiving node, edges arrive within SS. An edge outside SS carries Phase Error (PE) and triggers synchronization to realign the sample point at the PS1/PS2 boundary. During the frame, resynchronization on each qualifying recessive-to-dominant edge adjusts the bit time based on the PE relative to SS: a positive PE lengthens PS1 by up to the Synchronization Jump Width (SJW), and a negative PE shortens PS2 by up to SJW. Hard synchronization, triggered by the SOF dominant edge and the FDF-to-res dominant edge, restarts the bit time with SS completed. Only one synchronization is permitted per bit time (REQ-026). Figure 6 illustrates how two consecutive mid-frame synchronization events align an unsynchronized receiving node to the transmitter on the bus.

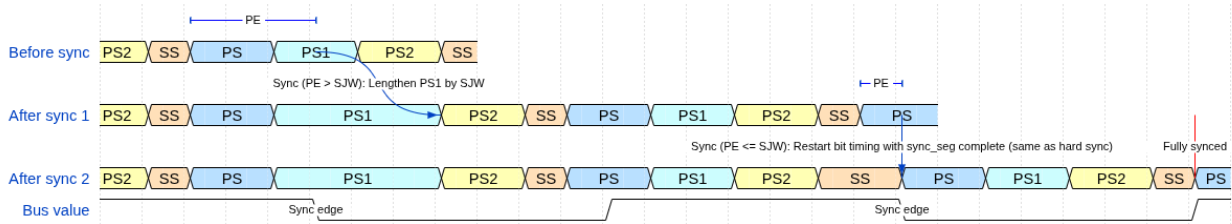


Figure 6: Resynchronization over two successive sync edges. PE is the phase error relative to SS. SJW is the Synchronization Jump Width.

4.3.2 Transmitter Delay Compensation

When the FD data phase begins, the transceiver loopback delay may span multiple data-phase bit times, necessitating a delay before sampling to compensate for in-flight bits (REQ-025). TDC measures this delay in the nominal-rate control field: from when the res bit goes dominant on TX to when the edge arrives on RX. The Secondary Sample Point (SSP) is then placed at the measured delay plus a programmable offset, firing before the SP in each bit time so that errors can be reacted upon at the SP. For the initial bits where the loopback has not yet returned, the SSP is suppressed. From the first valid SSP onward, SSP monitoring replaces SP monitoring for the remainder of the data phase, see Figure 7.

- **Bit error:** a transmitter reads back a polarity different from what it drove. Exceptions: a recessive non-stuff bit overridden during arbitration and a recessive bit in the ACK slot.
- **Stuff error:** six consecutive bits of the same polarity where the stuffing rule prohibits it.
- **CRC error:** received checksum does not match the locally recomputed value.
- **Form error:** a fixed-format field contains an illegal bit value.
- **Acknowledgment error:** a transmitter receives no dominant ACK bit from any receiver (REQ-014).

Detection of any error causes the detecting node to transmit an error flag, aborting the frame (REQ-022). An error active node transmits an active error flag of six consecutive dominant bits. An error passive node transmits a passive error flag of six consecutive recessive bits instead (REQ-007). Both are followed by an eight-bit recessive error delimiter.

The FCE tracks each node's error history through the Transmit Error Counter (TEC) and Receive Error Counter (REC). Counter increments and decrements follow the rules defined in REQ-029. A node begins in error active, transitions to error passive when either counter exceeds 127, and to bus off when TEC exceeds 255 (REQ-030). An error-passive transmitter is exempt from the TEC increment on an ACK error, preventing an isolated node from escalating to bus-off through failed acknowledgments alone. In bus off the node ceases all bus activity and shall not influence the bus (REQ-027) until 128 sequences of 11 consecutive recessive bits are observed, after which TEC and REC are reset and the node returns to error active. A host-initiated supervisory reset also returns the FCE to its initial state immediately (REQ-028). Whether error signaling is enabled at all is a run-time configuration parameter (REQ-036).

5 Verification Plan

The 38 requirements name protocol obligations and link each to its ISO clause, but say nothing about which module testbench should exercise them, what stimulus configurations are needed, whether internal signals must be observable, or how completion will be recognized. The verification plan answers those questions explicitly for each entry.

The plan was populated through the same MCP server introduced in Section 3. Each field value was schema-validated before being written. The five classification dimensions fall into two groups. Three are design-facing - `layer`, `side`, and `format_applicability` - determining where each requirement belongs in the module decomposition and what stimulus configurations its testbench needs. Two are verification-facing - `observability` and `verification_method` - resolving whether a requirement can be checked through port signals or requires access to internal state, and specifying the verification technique. Priority is orthogonal to both groups, driving implementation sequencing and determining which requirements block design closure.

5.1 Layer

The `layer` field assigns each requirement to the protocol sub-layer that owns it (LLC, MAC, PCS, or FCE - see Section 4.1), determining the verification boundary at which the requirement must be exercised. A fifth label - **system** - classifies requirements that are inherently multi-layer or multi-node in character. Some CAN behaviors cannot be attributed to a single layer of a single node: they emerge from interactions between multiple nodes on the bus, or span the layer boundary within a single node. The `system` label flags these requirements as ones that require either an integrated multi-module testbench or a multi-node simulation environment.

At design time, this classification directly motivated the layered module architecture: requirements assigned to a given layer pointed to the corresponding module as the responsible implementation unit and to that module's testbench as the primary verification environment.

5.2 Side

The side field records whether a requirement pertains to the transmitter path, the receiver path, or both roles simultaneously. This dimension reflects the ISO standard's own framing, which frequently specifies transmitter and receiver obligations separately. In the verification environment, the side field determines whether a testbench drives the DUT in transmitter mode, receiver mode, or both roles in succession within a single test scenario. The design consequences of this dimension - and why it appeared to motivate a split-path architecture but did not - are discussed in Section 6.2.

5.3 Format Applicability

The format_applicability field records which of the in-scope frame formats (CB, CE, FB, FE - see Figure 4, where CB and CE implicitly cover remote frame variants) each requirement applies to. Because the formats differ in stuffing mode, CRC polynomial, and control field structure (Section 4), a requirement that applies only to FD frames implies stimulus configurations with FDF=1 and DLC values spanning both the CRC-17 and CRC-21 threshold, while a requirement that applies to all four formats must be exercised across all format-specific configurations.

5.4 Observability

The observability field resolves each requirement as either black-box or white-box, relative to the module boundary of the owning layer:

- **Black-box:** Can be verified purely through the module's observable port signals.
- **White-box:** Verification requires direct observation of the module's internal state.

This distinction has direct consequences for testbench architecture. Black-box requirements are verifiable with stimulus-and-observe testbenches that drive inputs and check outputs. White-box requirements - which include CRC polynomial correctness, bit counter arithmetic, error counter thresholds, and Gray-coded SBC encoding - require a parallel reference model that re-computes the expected value independently, or direct observation of internal signals via testbench signal access.

5.5 Requirement Distribution

Table 5 shows the 38 requirements distributed across layer, side, format scope, and observability. MAC dominates in count and white-box density, reflecting the breadth of frame-encoding logic that must be verified against internal bit-level state. FCE requirements are entirely black-box: fault-confinement state transitions are fully observable through the node's error-state output signals without needing access to internal counters. Most requirements cover both transmitter and receiver roles (29 of 38); the eight TX-only requirements are concentrated in LLC and MAC. Six requirements do not apply to all four frame formats and require format-specific test configurations - five in MAC and one in PCS.

Table 5: Requirement distribution by layer, side, format scope, and observability. n = total. FS = format-specific (not applicable to all four frame formats). BB = black-box. WB = white-box.

Layer	Requirements	n	TX	RX	Both	FS	BB	WB
MAC	REQ-006, REQ-008, REQ-010–013, REQ-015–019, REQ-021–023, REQ-031, REQ-033, REQ-035–036, REQ-038	19	3	0	16	5	3	16
LLC	REQ-001–005, REQ-032, REQ-037	7	3	1	3	0	4	3
PCS	REQ-024–027	4	1	0	3	1	1	3
FCE	REQ-028–030	3	0	0	3	0	3	0
System	REQ-007, REQ-009, REQ-014, REQ-020, REQ-034	5	1	0	4	0	2	3
Total		38	8	1	29	6	13	25

5.6 Verification Plan Data Structure

The verification plan data structure (Table 6) augments each requirement with the dimensions needed to answer not just *what* must be true, but *how* it will be verified, *where* the evidence lives, and *when* verification is complete. The following sub-sections cover the remaining fields - `verification_method`, `label`, `file`, and `status` - which were not introduced as standalone classification dimensions above. The complete verification plan is reproduced in Section C as two separate tables (linked by common IDs).

Table 6: Verification-plan data structure fields.

Field	Purpose
<code>id</code>	Sequential identifier REQ-NNN.
<code>source_clause</code>	ISO 11898-1:2015 section reference.
<code>original_wording</code>	Verbatim normative text excerpts from the ISO standard.
<code>paraphrase</code>	Concise paraphrase of the <code>original_wording</code> field - the operative requirement statement.
<code>layer</code>	Sub-layer owner: LLC, MAC, PCS, FCE, or system (Section 5.1).
<code>side</code>	transmitter, receiver, or both (Section 5.2).
<code>format_applicability</code>	Applicable frame formats: CB, CE, FB, FE (Section 5.3).
<code>observability</code>	<code>black_box</code> or <code>white_box</code> (Section 5.4).
<code>verification_method</code>	Method(s) used to verify the requirement (Section 5.6.1).
<code>priority</code>	P1 (need-to-have), P2 (nice-to-have), or P3 (optional).
<code>status</code>	<code>not_started</code> , <code>in_progress</code> or <code>complete</code> (Section 5.6.3).
<code>notes</code>	Residual clarifications not resolved by the paraphrase - implementation constraints, out-of-scope markers, or known ambiguities flagged for design review.
<code>label</code>	Assertion label, TB procedure name, coverage ID, or RTL tag. Comma-separated when multiple procedures cover distinct sub-claims (Section 5.6.2).

Field	Purpose
<code>file</code>	Target file: TB for simulation/coverage, RTL for code inspection. Comma-separated when sub-claims span multiple files (Section 5.6.2).

5.6.1 Verification Method

Four methods are used: `simulation` (automated assertion procedures in a testbench), `code_inspection` (RTL source review), `waveform_inspection` (manual review of simulation output), and `coverage` (a functional coverage bin that records whether a specific condition or value range was exercised during simulation). Combinations are valid when multiple sub-claims within one requirement each call for a different method.

5.6.2 Traceability: Label and File

Each requirement entry carries two dedicated traceability fields: a `file` field identifying the testbench or RTL source file responsible for covering the requirement, and a `label` field identifying a specific named procedure, assertion, or coverage ID within that file. Together they establish a direct, navigable link from each requirement to its verification artifact.

5.6.3 Status

The status field (`not_started`, `in_progress`, `complete`) records requirement closure state explicitly, allowing partial progress to be tracked.

The verification plan - 38 requirements each classified along five dimensions and each linked to a testbench file and assertion label - served both as architectural input and as verification guide in what followed. The design-facing dimensions (`layer`, `side`, `format_applicability`) constituted the primary architectural inputs for the design phase, mapping requirements to module boundaries and implementation scope. The verification-facing dimensions (`observability`, `verification_method`, `label`, `file`) defined the testbench architecture and evidence type for each requirement. How the design-facing dimensions shaped the module decomposition - and where the apparent mapping from requirements structure to design structure broke down - is the subject of Section 6.

6 Design and Architecture

The verification plan classified all 38 requirements along three design-facing dimensions - `layer`, `side`, and `format_applicability`. Two led directly to sound architectural choices. One pointed toward a split TX/RX architecture that was attempted but created more problems than it solved, and was replaced by the unified `can_mac_fsm`.

6.1 Adopting the ISO 11898-1 Sub-layer Model

The `layer` dimension of the verification plan assigns every requirement to a specific ISO 11898-1 sub-layer. Mapping each sub-layer to a dedicated module is therefore the natural decomposition. Module boundaries align directly with verification targets, each requirement points unambiguously to the responsible implementation unit, and each module can be exercised in isolation without driving frame-level stimulus through unrelated sub-layers.

6.2 Combined vs. Separated TX/RX Paths

The side dimension classifies each requirement as TX-only, RX-only, or both - making separate TX and RX paths appear natural, since each could be exercised independently. In practice the split created more problems than it solved.

A split path duplicates both code and hardware. Shared protocol logic must exist in both paths, and each path needs its own bit stuffer and CRC engine - putting two instances of `can_mac_bs` and `can_mac_crc` on the device where one of each suffices. As shown in Figure 11, the unified design shares a single instance of each.

A further cost is implementation and debugging complexity. When the two paths are developed sequentially, shared protocol logic tends to diverge between implementations with no protocol justification. Debugging similarly doubles the investigation surface - tracing a bug requires reading two independent sets of waveforms.

The unified TX/RX path - a single `can_mac_fsm` with shared `can_mac_bs` and `can_mac_crc` instances - eliminates all three costs. Shared protocol logic exists once, preventing implementation drift. Debugging involves a single FSM and a single set of waveforms.

6.3 Per-Field FSM Granularity

The `format_applicability` dimension of the verification plan expresses requirements at the level of individual protocol fields. A requirement applies to a specific field in a specific set of frame formats. The natural FSM granularity is therefore one state per protocol field. With this structure, format-dependent transitions become state graph edges rather than counter conditionals inside a shared state, each requirement maps directly to a named FSM state, and testbench assertions can reference states rather than bit-count ranges. The detailed state graph is described in Section 7.2.

6.4 LLC Frame Format

6.4.1 Host-LLC Interface Format

All six bus frame types (CB, CE, FB, FE data frames, and remote frames for CB and CE) are represented at the host-LLC interface using the 71-byte LLC frame format shown in Figure 9. The layout extends the existing CAN Classic controller's LLC frame format, with bytes 0-3 carrying the identifier, byte 4 carrying frame type and DLC, and data beginning at byte 5 - matching the field positions used by the prior implementation. The extension adds 56 additional data bytes (bytes 5-68, zero-padded to 64 bytes) and two trailing flag bytes (bytes 69-70) carrying IDE, BRS, ESI, and RTR, so host software requires no change to the fields it already uses.

6.4.2 Internal LLC Frame Format

The host-LLC format places all control flags at the end of the frame. FDF, BRS, and ESI occupy byte 69, and IDE and RTR occupy byte 70 - after up to 64 bytes of payload. A serializer that consumed this stream in field order would need to buffer the entire 71-byte frame before it could begin transmitting, because IDE determines how many ID bits to drive (11 or 29), FDF determines which CRC polynomial and stuffing mode to use, and BRS determines whether to signal the PCS to switch bit rate at the BRS boundary. This buffering requirement conflicts with the streaming architecture.

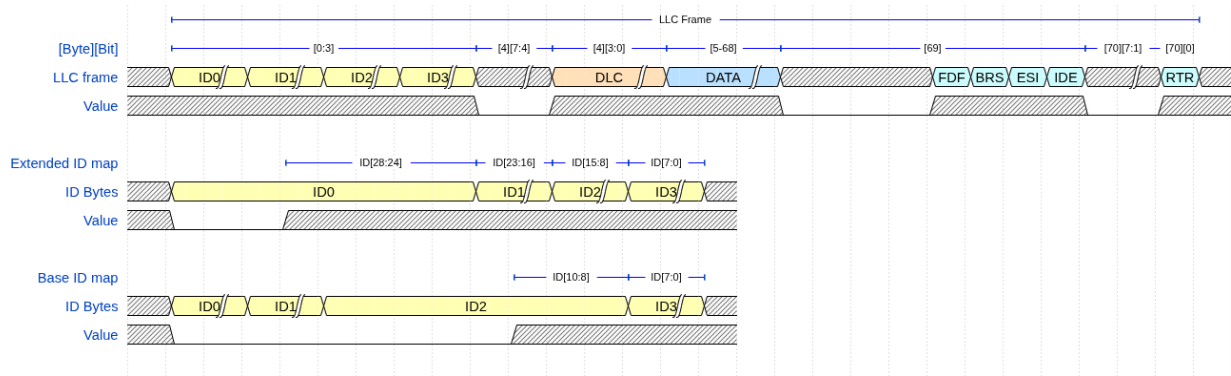


Figure 9: LLC frame format (71 bytes) at the host-LLC interface, with identifier byte mapping for base and extended IDs.

The design avoids this by defining a separate internal format for the MAC-facing stream, shown in Figure 10. All frame metadata is packed into two leading config bytes, followed by the ID and data bytes. With this layout, `can_mac_ser` extracts all frame metadata after receiving just two bytes and can begin streaming ID bits from the third byte onward. No frame buffering is needed - the MAC FSM receives each metadata field before it is required in the frame field sequence.

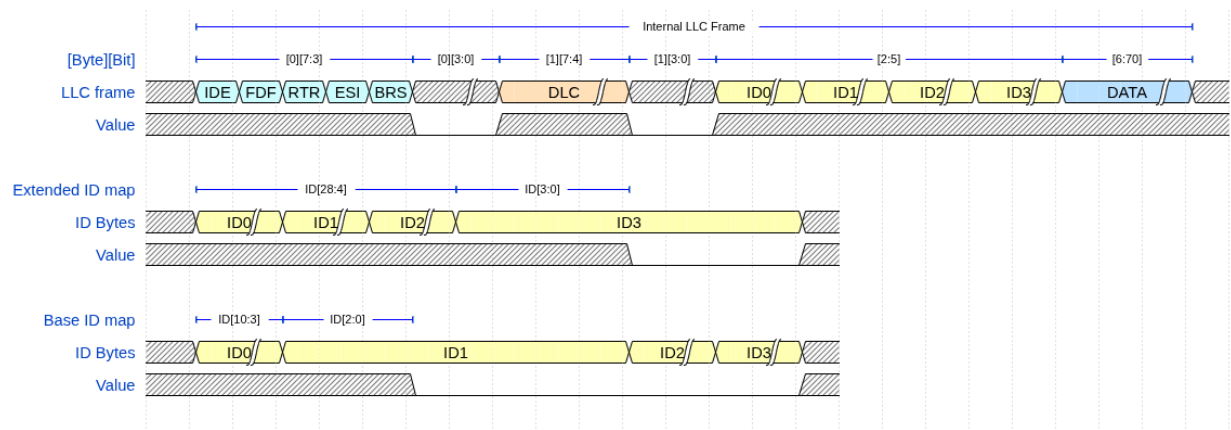


Figure 10: Internal LLC frame format at the `can_mac_ser` input, with identifier byte mapping for base and extended IDs.

6.5 System Overview

Figure 11 shows the complete module decomposition. The primary data path runs from `can_llc` through `can_mac` to `can_pcs`. The LLC receives frames from the host over an Avalon-ST interface and streams them byte-by-byte to the MAC serializer. The MAC FSM drives the serialized bit stream to the PCS, which applies bit timing and produces the sample-point and SSP strobes that the MAC uses to read and write the bus. `can_fce` sits outside the primary data path, receiving error and success events from the MAC and feeding node-state signals (error active, bus off) back to both the MAC and PCS. The PCS additionally pulses `can_fce` with idle conditions to drive bus-off recovery. A centralized types package (`pk_can_types`) defines all protocol constants, interface records, and reset values shared across modules.

7.2 can_mac_fsm

The `can_mac` sub-layer is built around a single unified FSM entity (`can_mac_fsm`). The complete signal-level interface is reproduced in Section B.

7.2.1 FSM Structure and Mode Flag

`can_mac_fsm` contains two synchronous processes (`p_fsm` and `p_stream_to_LLC`) and one `t_fsm_state` enum covering 19 states. An `is_transmitter` boolean signal is latched to `true` when the FSM drives the SOF dominant bit at the start of a new frame transmission and cleared at arbitration loss or at the end of the EOF field. Once latched, `is_transmitter` remains stable for the rest of the frame, partitioning per-state logic into a TX branch (`drive_bit` strobe: determines and drives `pcs_o.tx_data`) and an RX branch (`sample_point` strobe: advances state and captures received bits). The state transitions at the sample point are shared between TX and RX in most states. Only `s_ack` and `s_eof` carry role-specific logic on the sample-point path (ACK success latching, receiver dominant assertion, and frame-completion signaling respectively).

The per-field state granularity introduced in Section 6.3 is preserved in the unified FSM. The arbitration region uses two states: SOF is driven in `s_bus_idle`, and the ID bits, RTR/SRR/RRS, and IDE share `s_arbitration` with `bit_count` indexing into the 32-bit ID field. Each post-arbitration protocol field (FDF, RES, BRS, ESI, DLC, Data, SBC, CRC, CRC Delimiter, ACK, ACK Delimiter, EOF) has a dedicated state, making field boundaries explicit in the state encoding. The complete FSM is shown in Figure 12.

7.2.2 TX Mode: Frame Transmission

When `is_transmitter = true`, the FSM drives bits at each bit-boundary strobe and monitors the bus echo at each sample point to detect bit errors, ACK, and arbitration loss. In the CAN FD data phase, the SSP strobe replaces the SP for bit-error monitoring. The MAC compares `pcs_i.rx_data` against `transmitted_bits_shift_reg(tdc_delay)` - where `tdc_delay` is supplied alongside the SSP strobe by the PCS - to check the bit that was transmitted `tdc_delay` bit times earlier [8, Sec. 7.3.4]. A register depth of 8 provides margin for realistic transceiver loop delays and data-phase bit rates. Arbitration loss clears `is_transmitter` in-place in `s_arbitration`, which then continues as an RX observer.

The CRC and bit-stuffer feed source requires special handling at the arbitration boundary. Throughout `s_arbitration` both transmitter and receiver feed `pcs_i.rx_data` - the actual bus value - rather than the locally driven bit. If the transmitter loses arbitration and continues as a receiver, its CRC accumulator must hold exactly the value a pure receiver would have built. From `s_fdf_r1_r0` onward the transmitter switches to `transmitted_bits_shift_reg(0)`, which avoids any dependency on `pcs_i.rx_data` echo latency once TDC is active.

7.2.3 RX Mode: Frame Reception

When `is_transmitter = false`, the FSM observes `pcs_i.rx_data` at each sample-point strobe and stores received bits directly into an internal `llc_frame` byte array. No separate deserializer is needed. The bit stuffer is driven from `pcs_i.rx_data` to perform destuffing, and the CRC engine accumulates the received bit stream in parallel. The FSM validates the SBC field (FD frames), compares the received CRC against the locally accumulated result, and checks form bits (reserved bits, CRC delimiter, ACK delimiter, EOF) for required polarities. A mismatch in any of these fields triggers a transition to the error-frame sequence. During the ACK slot the FSM drives `pcs_o.tx_data = c_dominant` for one bit (`bit_count`

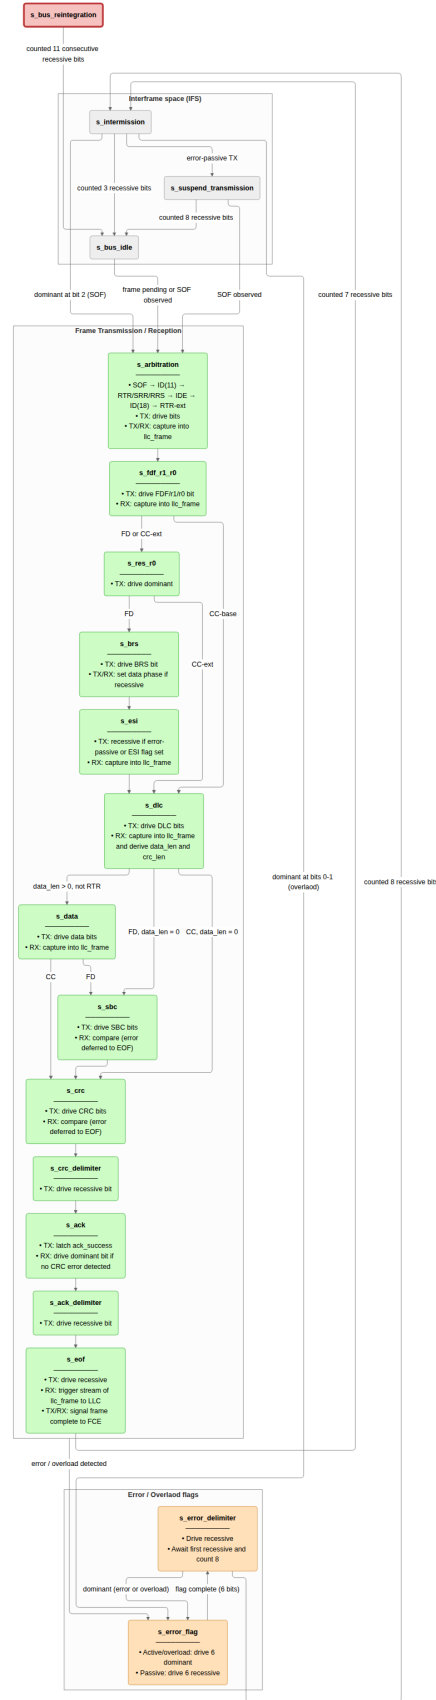


Figure 12: `can_mac_fsm` (19 states) controlling TX and RX for all in-scope frame formats. Arbitration loss clears `is_transmitter` in place without a state transition.

= 0) regardless of frame format. The FD ACK slot spans two bits but the receiver asserts dominant only during the first. The bus is released after the ACK delimiter [8, Sec. 8.1.4.2.b].

During `s_intermission`, the completed frame is streamed byte-by-byte to the LLC RX sink over the Avalon-ST interface, and successful reception is signaled to the FCE. This design eliminates the need for a separate deserializer entity on the RX path - the frame buffer is populated and streamed entirely within `can_mac_fsm`.

7.2.4 Error-Frame States

The FSM uses two explicit error-frame states. `s_error_flag` drives the 6-bit flag and `s_error_delimiter` counts the 8-bit recessive delimiter. The delimiter state has two sub-phases: first awaiting the bus to go recessive (other nodes may still be driving their own flags), then counting the remaining recessive bits. A dominant during the delimiter restarts the error-frame sequence - either as a new error or as an overload condition on the last delimiter bit [8, Sec. 8.1.4.2.f]. Both transmitter and receiver errors enter this same two-state sequence: the flag polarity is not `fce_i.error_active`, determined by the FCE node state rather than the TX/RX role, and `s_error_delimiter` is entirely role-independent.

7.3 `can_mac_ser`

`can_mac_ser` converts the LLC byte stream into a serial polarity bit stream for the MAC FSM. Its four-state FSM manages the two-byte configuration handshake, byte fetching, and bit-by-bit serialization. The serializer extracts LLC metadata (IDE, FDF, DLC, FTYP, BRS, ESI) from the two config bytes and registers it in `t_llc_metadata`, which remains stable for the entire frame. The internal frame format that makes this possible is described in Section 6.4.2. The serializer forwards `transfer_status` from the FSM back to the LLC, returning to `s_load_config_byte_0` on any non-ongoing status so that errors and aborts terminate serialization immediately.

The 32-bit ID field in the internal format is left-aligned: a base identifier (11 bits) occupies bits [31:21], leaving 21 unused bits at the LSB end. An extended identifier (29 bits) occupies bits [31:3], leaving 3 unused bits. The serializer tracks this with two counters initialized in `s_load_config_byte_1` from the `ide` flag: `id_bits_remaining` counts real ID bits still to be presented, and `padding_bits_remaining` counts trailing unused bits to be skipped. In `s_shift_out_bits`, padding bits are advanced without asserting `valid`, so the MAC FSM never observes them. This means the FSM always receives exactly 11 or 29 consecutive valid ID bits regardless of frame format, with no format-specific logic required downstream. The four-state serializer FSM is shown in Figure 13.

The bit stream it produces feeds the bit stuffer, which may insert additional stuff bits before the FSM drives each bit to the PCS interface.

7.4 `can_mac_bs`

`can_mac_bs` implements both dynamic and fixed bit stuffing for CAN Classic and CAN FD frames [8, Sec. 10.6]. The single entity is instantiated once inside `can_mac_fsm` and serves both TX stuffing and RX destuffing via the same logic - the FSM drives the same `bs_i` interface regardless of role, and the stuffer's output is either inserted into the TX bit stream or used by the FSM to discard a received destuff bit.

In **dynamic mode** (`fixed_bit_stuffing_en` = '0'), the stuffer counts consecutive bits of identical polarity and emits an inverse-polarity stuff bit after every five (REQ-018). A binary `stuff_count` counter is incre-

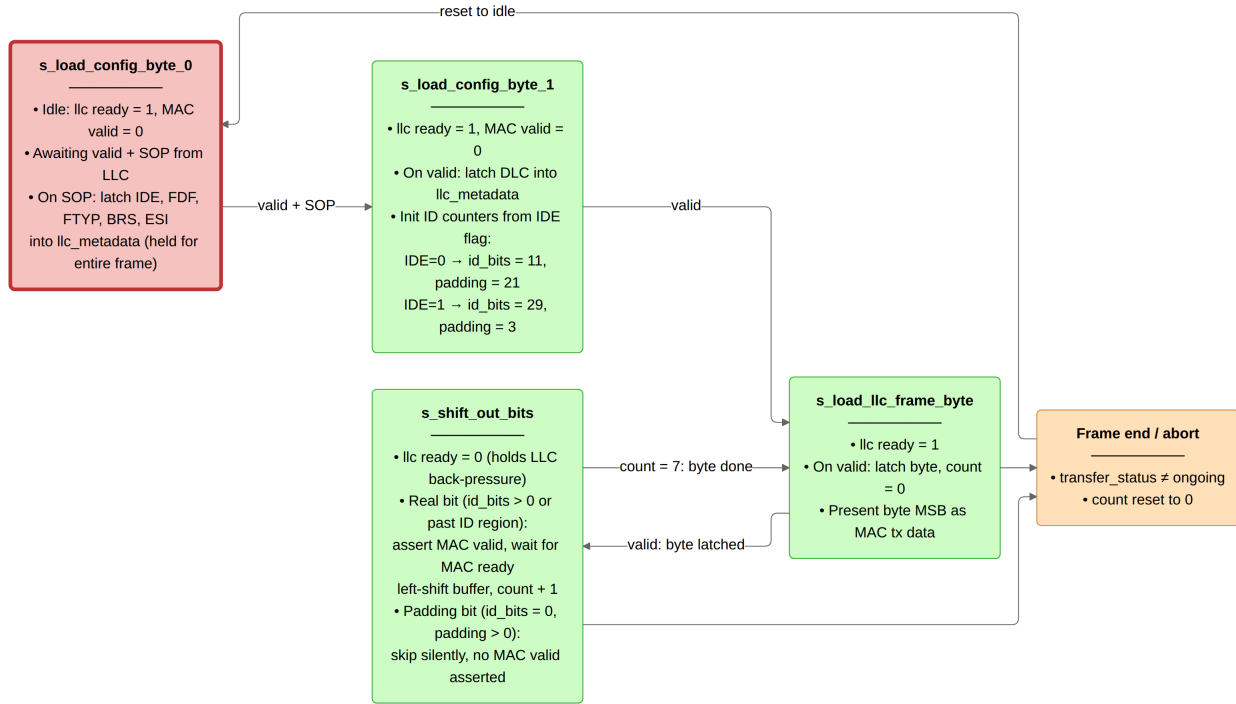


Figure 13: can_mac_ser FSM (four states) serializing the internal LLC frame to the MAC bit stream. Unused padding bits in the 32-bit ID field are skipped silently.

mented on each dynamic stuff bit. Its value is Gray-coded and parity-encoded into the `stuff_bit_count` output, which the FSM reads when transmitting the SBC field (REQ-016).

In **fixed mode** (`fixed_bit_stuffing_en = '1'`), used for the FD CRC region, one fixed stuff bit (FSB) is emitted immediately on the rising edge of `fixed_bit_stuffing_en`, then one FSB every four real bits (REQ-018). The FSB polarity is always the inverse of the preceding bit, so a receiver can detect a form error if the FSB matches its predecessor.

The transition from dynamic to fixed stuffing requires special handling when a dynamic stuff bit is already pending at the rising edge of `fixed_bit_stuffing_en`. Suppressing the pending dynamic SB would cause a TX/RX divergence: the transmitter and receiver would derive different `stuff_count` values from the same bit stream, causing SBC mismatch. The implementation instead promotes the pending dynamic SB to the initial FSB - the two coincide and both requirements are satisfied simultaneously (see Figure 14, REQ-016, REQ-018). On the falling edge of `fixed_bit_stuffing_en`, any pending FSB is cancelled immediately. The MAC FSM exits fixed stuffing at the last CRC bit without providing a slot to drain a still-pending FSB.

Its `stuff_bit_count` output is the SBC value the FSM reads when transmitting the SBC field.

7.5 can_mac_crc

CAN Classic computes its CRC over the raw bit stream excluding stuff bits, while CAN FD includes dynamic stuff bits up to and including the data field - a difference that exists because the FD CRC must protect the stuff-bit count as well as the data. A single data feed to the CRC engine is therefore insufficient: CC and FD frames require different input streams. The design exposes two feeds on the CRC interface (`data_cc` and `data_fd`) so the FSM can drive both simultaneously and the CRC module requires no protocol knowledge about which stream to select.

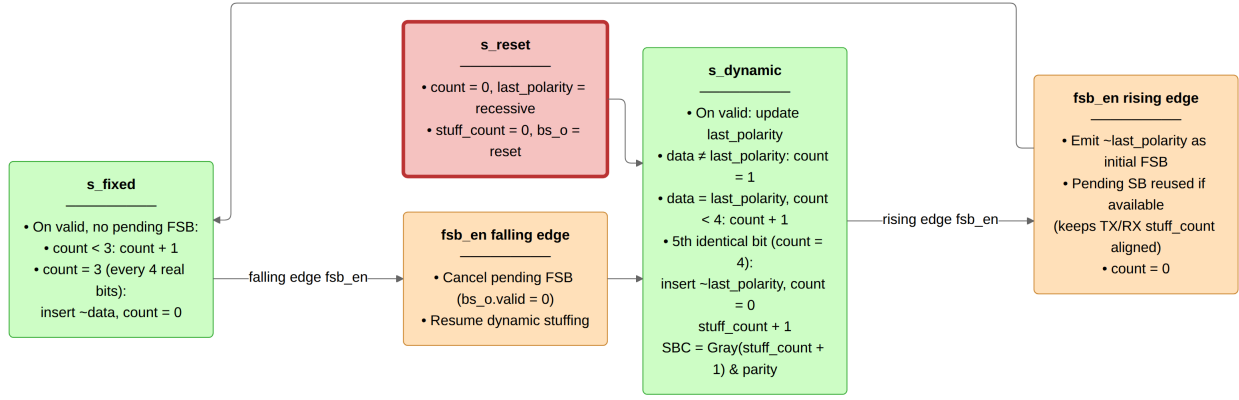


Figure 14: can_mac_bs operating in dynamic and fixed stuffing modes. A pending dynamic stuff bit at the rising edge of fsb_en is promoted to the initial FSB rather than suppressed.

can_mac_crc provides CRC generation and checking for both CAN Classic and CAN FD frames. CAN Classic frames use CRC-15, while CAN FD frames use CRC-17 (data payloads up to 16 bytes) or CRC-21 (data payloads above 16 bytes) [8, Sec. 10.4.2.6]. The single entity is instantiated once inside can_mac_fsm, serving both TX (generation) and RX (checking). The FSM sets crc_poly_select from the DLC field in llc_metadata before the first frame bit is driven: because the internal LLC frame format (Section 6.4.2) delivers DLC in config byte 1, the polynomial is known upfront and requires no mid-frame switching.

Three parallel gen_crc instances run continuously on separate data feeds: data_cc drives CRC-15 via valid_cc, while data_fd drives both CRC-17 and CRC-21 via valid_fd. The output multiplexer selects the active engine's result based on crc_poly_select and left-aligns it to the common 21-bit output width by zero-extending the shorter results at the least significant bit: CRC-15 occupies bits [20:6], CRC-17 occupies bits [20:4], and CRC-21 occupies the full width.

The output mux (p_crc_mux) is combinatorial rather than registered. Each gen_crc instance registers its accumulator on the rising edge, so the mux selects over three current registered values - the rationale for registering module outputs is satisfied one level down. Omitting the register keeps IPT at 2 system clocks: SP+1 for the final accumulator update, SP+2 for the mux read. ISO 11898-1 §7.3.3 mandates $\text{IPT} \leq 2 t_q$ (REQ-024), and at minimum prescaler ($m=1$, $t_q = 1$ system clock) that leaves exactly 2 system clocks. A registered mux would require 3 system clocks, violating this bound at $m=1$ (see Figure 15).

7.6 can_fce

can_fce implements the error FSM and counter management specified in ISO 11898-1 [8, Secs. 8.1.3–8.1.4]. It maintains TEC (Transmitter Error Counter) and REC (Receiver Error Counter) and transitions between three states: s_error_active (normal operation), s_error_passive (TEC or REC > 127), and s_bus_off (TEC > 255), as shown in Figure 16.

Counter updates follow the rules in [8, Sec. 8.1.4.2]: TEC increments by 8 on TX errors, with mac_i.passive_tx_ack_error_exempt_1 suppressing the increment for the passive ACK error exemption (ISO 8.1.4.2.c, Exception 1). TEC decrements by 1 on successful TX. REC increments by 1 on RX errors during non-error-flag phases, by 8 on primary errors or error-flag-phase errors, and decrements by 1 or clamps to 127 on successful RX. Bus-off recovery requires counting 128 pcs_i.idle_condition pulses (11 consecutive recessive bits each) from the PCS, which resets both counters and returns the FSM to s_error_active. llc_i.normal_mode is a supervisory reset per ISO 11898-1 that forces the same transition from any node state immediately.

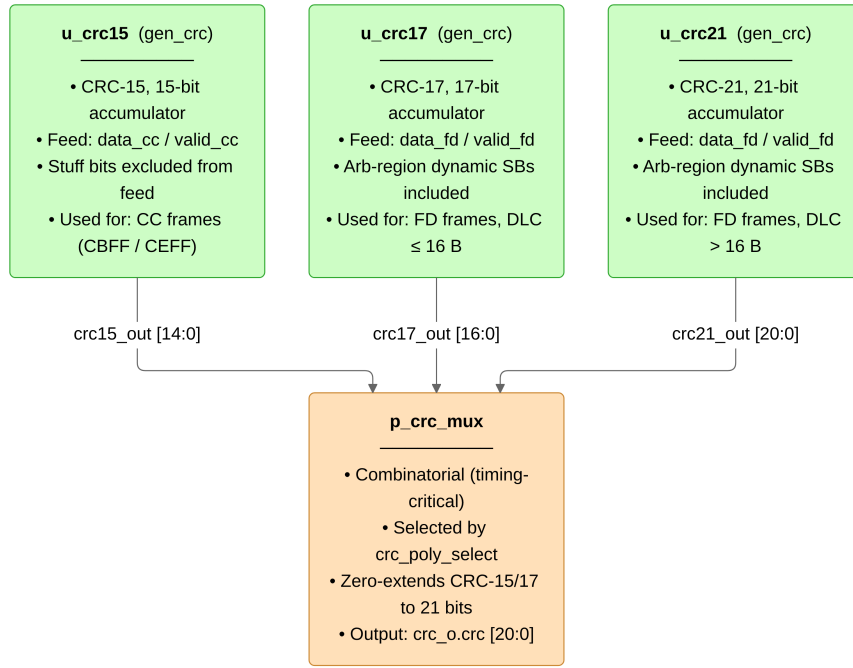


Figure 15: `can_mac_crc` dataflow with three parallel CRC engines. The output mux is combinatorial to satisfy the ISO $\text{IPT} \leq 2 t_q$ constraint at minimum prescaler.

The one counter rule that requires careful reading of the ISO prose is the passive ACK error exemption (ISO 8.1.4.2.c, Exception 1): an error passive node that transmits a frame and receives no dominant ACK bit shall not increment TEC, because the node's passive error flag is recessive and may itself prevent receivers from asserting the ACK slot. The FCE has no frame-level visibility - it receives event signals from the MAC, not raw bus bits - so the MAC must explicitly signal this case via `mac_i.passive_tx_ack_error_exempt_1`, asserted when the FSM detects an ACK error while `mac_o.error_active` is deasserted. Without this signal the FCE would treat an unacknowledged passive-node transmission identically to any other ACK error and escalate TEC unnecessarily.

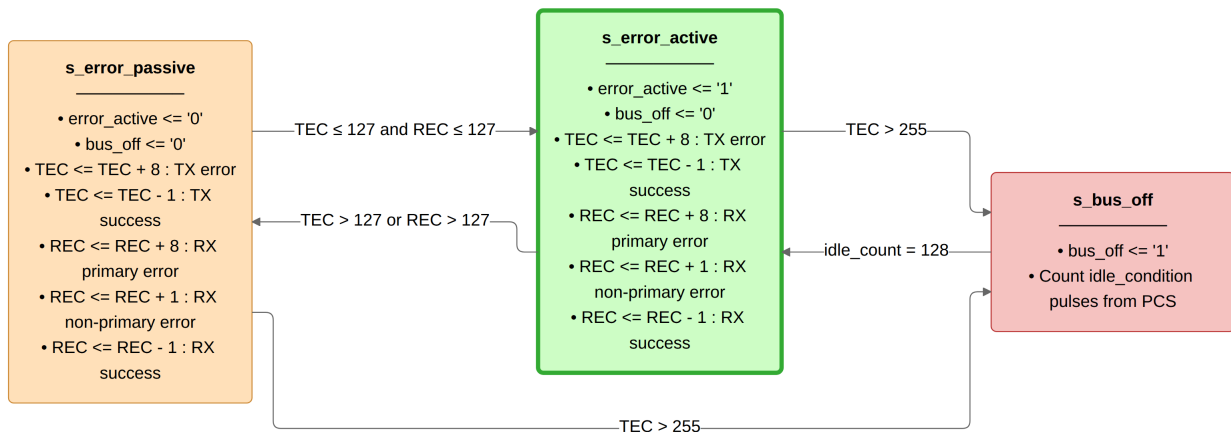


Figure 16: `can_fce` FSM governing the error active, error passive, and bus off node states per ISO 11898-1 sec. 8.1.4.4.

7.7 can_pcs

`can_pcs` is a cyclic bit-timing engine: its internal `t_segment` register advances through `s_sync_seg` (1 TQ, fixed), `s_prop_seg`, `s_phase_seg1`, and `s_phase_seg2` on every TQ boundary. The SP strobe and `rx_data` latch fire at the end of `s_phase_seg1`. The TX bit is driven at the end of `s_phase_seg2`. When `fce_i.bus_off` is asserted, the SP slot counts consecutive recessive bits and pulses `fce_o.idle_condition` every 11 bits for FCE bus-off recovery. The full timing operation is shown in Figure 17.

7.7.1 Resynchronization

`can_pcs` implements all four sub-claims of REQ-026. Sub-claim 1 (one synchronisation per bit time) is enforced by a `sync_applied` flag that gates the edge-qualify predicate and clears at each sample point. Sub-claim 2 (only R→D edges qualify, previous SP must be recessive, no sync while transmitting) is enforced by `sync_applied` gating sync to the post-SP window, where `rx_bus_prev` holds the SP-sampled value, making the R→D check simultaneously a check on SP polarity. A transmitter guard suppresses sync during TX. Sub-claim 3 (hard sync) is MAC-controlled via `do_hard_sync`, allowing the MAC to select hard sync at the FDF-to-res transition without disturbing PCS timing state. Sub-claim 4 (resync by segment adjustment) adjusts `Phase_Seg1` or `Phase_Seg2` by up to SJW. Errors not exceeding SJW produce the same effect as a hard synchronisation.

7.7.2 Dual Bit Rate Switching

`can_pcs` holds no frame-format knowledge. Rate switching is entirely MAC-driven through three dedicated control signals on the MAC-PCS interface.

At the BRS sample point, `can_pcs` reads BRS polarity and, if recessive, replaces the active segment lengths and SJW with their data-phase counterparts for the remainder of the data phase (see Figure 17). TDC measurement is armed at the FD reserved bit boundary (Section 7.7.3). `mac_i.data_phase_stop`, asserted by the MAC at the CRC delimiter SP or on error-frame entry, restores nominal timing and clears all TDC state.

This interface design keeps protocol knowledge in the MAC layer and timing knowledge in the PCS layer, following the ISO 11898-1 layered architecture. `can_pcs` does not inspect DLC or frame format - the only frame-level observation it makes is reading the BRS bit polarity when `mac_i.next_bit_is_brs` is set, making it independently testable against any timing configuration without frame-level stimulus.

7.7.3 Transmitter Delay Compensation

The motivation and principle of TDC are described in Section 4.3. The implementation uses a three-stage pipeline within `p_can_pcs`: count up from the FD reserved bit boundary until the TX-to-RX echo arrives, wait for the first data-phase bit boundary, then count down the measured delay to arm the SSP. Once armed, `current_temp` SSP fires at a fixed offset within `s_phase_seg1` every data-phase bit time. The measured round-trip delay is supplied to the MAC as `mac_o.tdc_delay` for indexing into the transmitted-bit shift register (Section 7.2). The full TDC pipeline is shown in Figure 17.

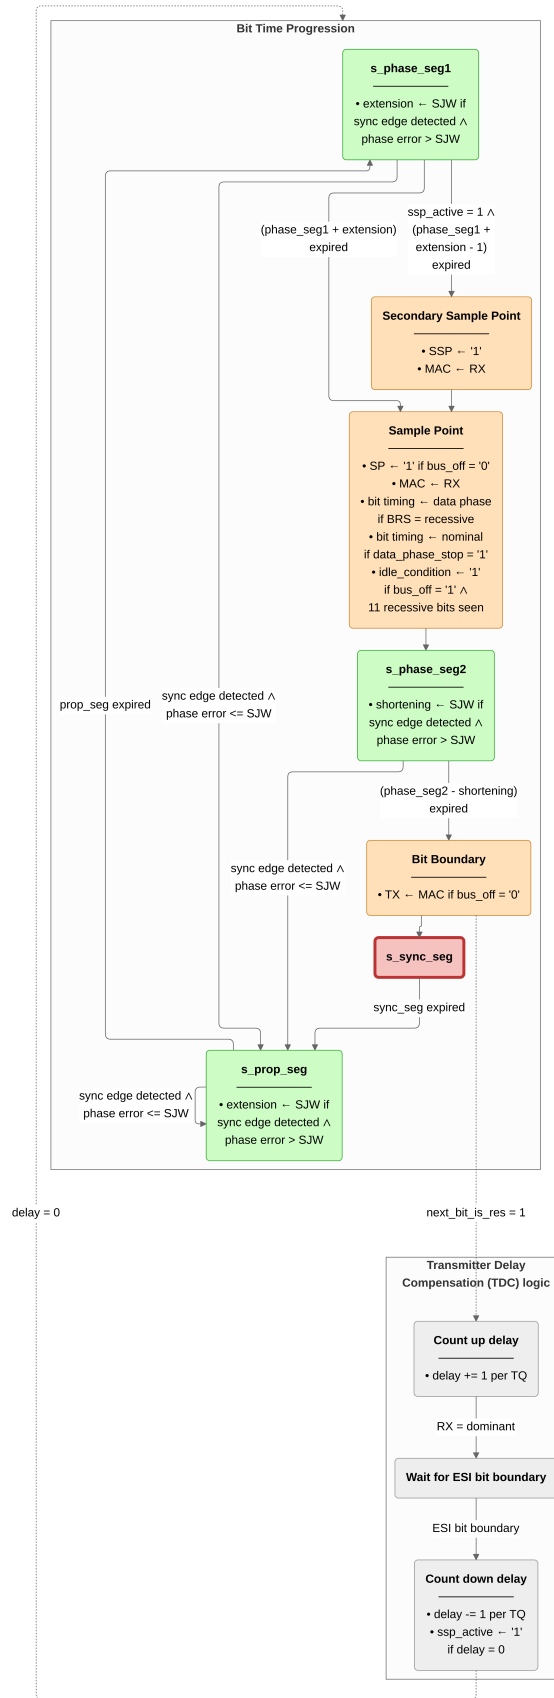


Figure 17: `can_pcs` bit-time FSM with concurrent resynchronization and TDC pipelines per ISO 11898-1 sec. 7.2-7.4.

8 Verification and Results

The implementation described in Section 7 was exercised against the 38-requirement verification plan (Section 5) using five dedicated testbenches, each aligned to a module boundary established by the layered architecture. `can_mac_pcs_fce_tb` is the primary integration testbench, exercising two `can_mac_pcs_fce` instances connected through a dominant-wins bus model and covering 16 requirements spanning MAC frame encoding, PCS bus-off recovery, and FCE-driven error flag generation. The four unit testbenches - `can_mac_crc_tb`, `can_mac_bs_tb`, `can_pcs_tb`, and `can_fce_tb` - target individual submodules with focused stimulus. `can_mac_ser_tb` exercises the serializer but has no standalone requirement entries in the verification plan. Of the 38 requirements, 27 are closed. Table 7 lists the five testbenches and their coverage. Figure 18 shows the testbench architecture.

[REQ-013](#) (dual CRC data feed: CC excludes dynamic stuff bits, FD includes them) and [REQ-023](#) (overload frame conditions) are verified by code inspection against `can_mac_fsm.vhd` rather than simulation. `can_mac_crc_tb` closes [REQ-006](#) via three coverage bins: CB and CE frames (CRC-15), FD frames with payload up to 16 bytes (CRC-17), and FD frames with payload greater than 16 bytes (CRC-21), all hit. `can_mac_bs_tb` closes [REQ-016](#) via the `p_sbc_checker` assertion and [REQ-018](#) via input and output coverage bins, all bins hit. `can_pcs_tb` closes [REQ-025](#) via the `p_check_tdc_delay` assertion.

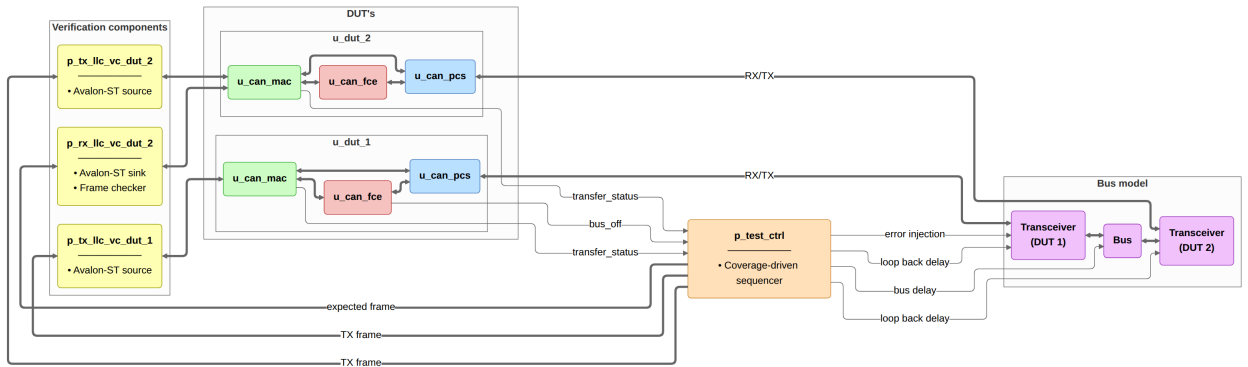


Figure 18: `can_mac_pcs_fce_tb` integration testbench. Two `can_mac_pcs_fce` instances connect through a dominant-wins bus model. Avalon-ST VCs drive and sample the MAC interfaces. `p_test_ctrl` sequences test stimuli, injects bit errors via `dut_1_rx_recessive`, and reads pass/fail status from the TX-status and bus-off monitors.

Figure 19 shows the two-node integration scenario from `can_mac_pcs_fce_tb`: a complete FD frame transmitted by DUT 1 and received by DUT 2, with SSP pulses confirming TDC is active during the data phase and resynchronization events visible on DUT 2 ([REQ-010](#), [REQ-012](#), [REQ-014](#), [REQ-017](#), [REQ-026](#)). Figure 20 shows the bit stuffer's dynamic and fixed mode behavior from `can_mac_pcs_fce_tb` ([REQ-016](#), [REQ-018](#)). Figure 21 shows dual bit rate switching and TDC measurement from `can_mac_pcs_fce_tb`: the PCS replaces nominal segment lengths at the BRS sample point and positions the SSP once the transceiver loopback delay is measured ([REQ-015](#), [REQ-024](#), [REQ-025](#), [REQ-031](#)). Figure 22 shows the arbitration loss scenario from `can_mac_pcs_fce_tb`: the losing node clears `is_transmitter` in-place at `s_arbitration` and continues as receiver without a state transition ([REQ-020](#)). Figure 23 shows the error frame escalation: a bit error on the SOF bit triggers the first error flag, and subsequent bit errors on each dominant error flag bit escalate TEC to 128, transitioning the node to error passive and inserting `s_suspend_transmission` after `s_intermission` ([REQ-007](#), [REQ-008](#), [REQ-021](#), [REQ-022](#), [REQ-029](#)). Figure 24 shows bus-off recovery from `can_mac_pcs_fce_tb`: 128 idle condition strobes from the PCS reset TEC and REC to zero and return the node to `s_error_active` ([REQ-009](#), [REQ-030](#)).

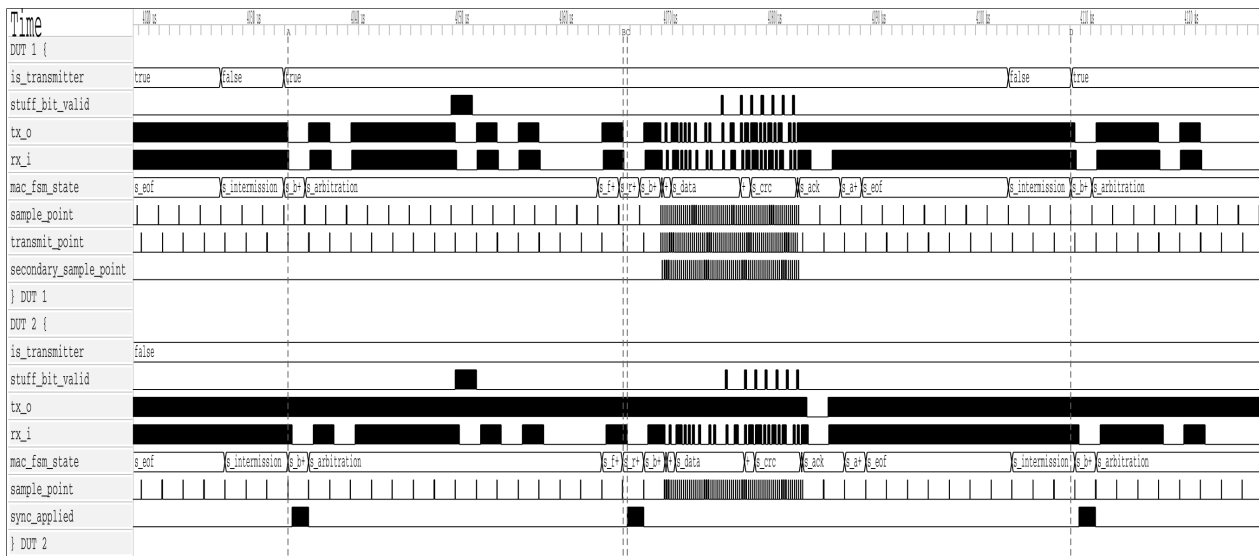


Figure 19: Two-node simulation of a complete FD frame in `can_mac_pcs_fce_tb`, showing the full field sequence from `s_arbitration` through `s_eof` on both transmitter and receiver. Secondary sample point pulses confirm TDC is active during the data phase. Resynchronization events are visible on DUT 2 via `sync_applied`.

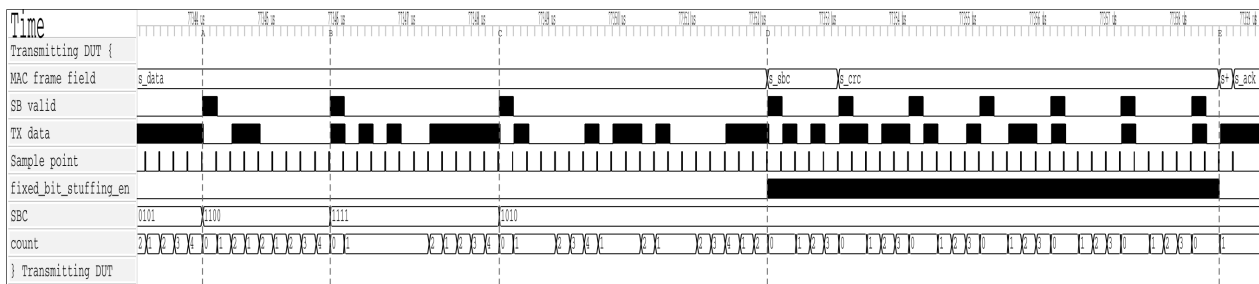


Figure 20: Dynamic and fixed bit stuffing in `can_mac_pcs_fce_tb`. Dynamic stuff bits are inserted at A, B, and C in the `s_data` region. At D, `fixed_bit_stuffing_en` asserts and the stuffer switches to fixed mode for `s_sbc` and `s_crc`. Seven fixed stuff bits are inserted between D and E.



Figure 21: Dual bit rate switching and TDC measurement in `can_mac_pcs_fce_tb`. At A, the PCS begins counting the transceiver loopback delay in TQ increments. At B, the transmitted bit arrives on RX and the count stops at 19 TQ. At C, the first data-phase bit (ESI) is transmitted and the measured delay is counted down. When the countdown terminates at D, the SSP strobe activates and the TDC delay of 2 is signaled to the MAC. `next_bit_is_res` and `next_bit_is_brs` control the measurement window. `data_phase_stop` signals the end of the data phase.

Eleven requirements remain open. Eight are LLC requirements ([REQ-001](#) through [REQ-005](#), [REQ-032](#), [REQ-035](#), [REQ-037](#)) deferred pending implementation of `can_llc`. One P2 requirement - [REQ-036](#) (error signaling enable) - is deferred as non-blocking. [REQ-021](#) (error detection, P1) has partial simulation coverage: bit-error detection is exercised via recessive injection in `test_bus_off`, but stuff, form, CRC, and ACK error detection are covered by code inspection only, as each requires a frame-aware stimulus source to inject the error at the correct field boundary (Section 10.2). [REQ-034](#) sub-claim 1 (bus re-integration before TX) remains open pending a full-stack testbench.

8.1 Testbench Results Summary

Table 7: Testbench execution status and requirements coverage.

Testbench	Requirements covered	Status
<code>can_mac_crc_tb</code>	REQ-006	Pass
<code>can_mac_bs_tb</code>	REQ-016 , REQ-018	Pass
<code>can_pcs_tb</code>	REQ-024 , REQ-025 , REQ-026 , REQ-027	Pass
<code>can_fce_tb</code>	REQ-028 , REQ-029 , REQ-030 , REQ-034 (sub-claim 2 only)	Pass
<code>can_mac_pcs_fce_tb</code>	REQ-007 , REQ-008 , REQ-009 , REQ-010 , REQ-011 , REQ-012 , REQ-014 , REQ-015 , REQ-017 , REQ-019 , REQ-020 , REQ-021 (bit error only), REQ-022 , REQ-031 , REQ-033	Pass

9 Synthesis

The implemented `can_mac_pcs_fce` stack was synthesized using Quartus Prime Standard Edition 21.1.1 targeting the Cyclone 10 LP device (10CL016YU256I7G) used in Everllence’s IO-extender board. The synthesis used a standalone project with all record-typed ports flattened to individual `std_logic` and `std_logic_vector` signals and all I/O marked as `VIRTUAL_PIN`, isolating logic resource consumption from I/O buffer overhead. The clock constraint was set to 6 ns (166 MHz), deliberately overconstraining relative to any realistic CAN FD system clock to expose worst-case timing paths.

9.1 Resource Utilization

The synthesized design uses 4,608 logic elements (30% of the 15,408 available on the target device) and 869 dedicated registers. No memory blocks, embedded multipliers, or PLLs are used. Table 8 shows the per-module resource breakdown.

Table 8: Resource utilization on Cyclone 10 LP (10CL016YU256I7G): CAN FD module breakdown and CAN Classic baseline.

Module	LEs	Registers	Function
<code>can_mac_fsm</code>	4,109	684	Protocol FSM and RX frame buffer
<code>can_pcs</code>	190	49	Bit timing, TDC, dual bit rate
<code>can_fce</code>	117	31	Fault confinement (TEC/REC)
<code>can_mac_crc</code>	84	53	Three parallel CRC engines
<code>can_mac_ser</code>	84	40	TX serializer
<code>can_mac_bs</code>	31	12	Bit stuffer (dynamic and fixed mode)
CAN FD total	4,608	869	

Module	LEs	Registers	Function
CAN Classic (can_bus_controller)	1,146	334	Existing controller, see Section 1.2

can_mac_fsm dominates at 89% of total logic elements. The primary driver is the RX frame buffer: the FSM accumulates received frames into a 70-byte (560-bit) internal byte array, and each buffer register drives combinatorial decode and mux logic. The five remaining modules together consume 506 LEs, confirming that the PCS, FCE, CRC, serializer, and bit stuffer layers add modest overhead relative to the frame buffer cost.

9.2 Timing Results

Table 9 shows the setup and hold slack across all timing corners at the overconstraining 166 MHz clock.

Table 9: Timing results for can_mac_pcs_fce at 6 ns (166 MHz) on Cyclone 10 LP.

Corner	Worst setup slack	fmax estimate	Hold slack
Slow 1150 mV 100°C	-1.858 ns	~127 MHz	+0.236 ns
Slow 1150 mV -40°C	-1.550 ns	~152 MHz	+0.021 ns
Fast 1150 mV 100°C	+0.230 ns	>166 MHz	+0.163 ns
Fast 1150 mV -40°C	+0.580 ns	>166 MHz	+0.145 ns

The worst-case fmax is approximately 127 MHz on the slow 100°C corner. The setup failure at 166 MHz is a consequence of the deliberate overconstrain and does not indicate a functional problem at any realistic system clock frequency. At a 5 Mbit/s data-phase bit rate with the ISO-minimum 8 TQ per bit [8], a system clock of 40 MHz suffices at prescaler 1. The 127 MHz worst-case fmax exceeds this by more than 3×, meeting timing with comfortable margin on all corners. Hold slack is positive across all corners. At 30% device utilization on the smallest Cyclone 10 LP variant, the stack fits on the next device step up (10CL025, approximately 19%) or any larger variant in the family.

10 Discussion

The three design-facing verification plan dimensions - layer, side, and format_applicability - shaped the implementation in ways that were not uniformly constructive. layer and format_applicability motivated sound choices directly: the layered decomposition mapped each requirement to a testable module, and per-field FSM granularity with front-loaded config bytes followed naturally from format applicability analysis. The side dimension was a red herring: it made a split TX/RX architecture look well-motivated, but frame structure is the same regardless of which node is driving. Verification plan dimensions are inputs to testbench architecture - which stimulus configurations to exercise - not to RTL decomposition.

The unified FSM paid off most concretely at the arbitration loss boundary: is_transmitter clears in place in s_arbitration and the shared CRC accumulator and bit stuffer carry over without any handoff. The split-path design required explicit state synchronization at exactly that point, and failed there first (Section 6.2). A fix to can_mac_bs or can_mac_crc propagated to both TX and RX paths automatically. Frame buffer continuity is a further payoff: the llc_frame byte array is already being populated from

`pcs_i.rx_data` during the arbitration region, so when `is_transmitter` clears on arbitration loss, reception continues into the same buffer with no data to move. A split design would need an explicit transfer mechanism to move partially-accumulated frame data from the TX entity to the RX entity mid-frame.

The layered architecture made white-box requirements tractable. `can_fce_tb` exercised all counter-update rules in isolation. `can_mac_bs_tb` exhaustively covered stuffing mode transitions by driving the stuffer interface directly. `can_mac_pcs_fce_tb` then covered the multi-module scenarios - arbitration loss, error escalation, TDC - that cannot be observed at a single module boundary.

The AI-assisted extraction pipeline introduced a subtle bias that had direct architectural consequences. Classifying each requirement along the side dimension produced a requirements table organized along the TX/RX axis - a faithful representation of the ISO standard, which does frame many obligations in transmitter and receiver terms. But the artifact's structure became an implicit architectural suggestion: a table split along TX/RX lines made a split TX/RX RTL implementation look like the natural realization of the requirements model. The AI did not recommend a split architecture - it simply organized the requirements in a way that made the split appear structurally motivated. The split-path attempt was not the result of bad engineering judgment. It followed a coherent but misleading signal from the requirements artifact. This points to a broader risk in AI-assisted engineering workflows: the structure of an extracted artifact encodes implicit suggestions about downstream decisions, and those suggestions are not labeled as such. Validating the artifact's structure - not just its content - against protocol reality is a step the AI-assisted process does not perform automatically.

The 27/38 requirement closure rate warrants careful interpretation. The 11 open requirements fall into three categories with different implications for production confidence. Eight are LLC requirements deferred pending `can_llc` implementation - a known scope boundary, not a gap in the implemented protocol engine. One P2 requirement ([REQ-036](#) error signaling enable) is non-blocking for the core use case: a node that lacks a configurable error-signaling disable is still a fully correct CAN FD participant.

The synthesis results provide a third lens on the design. The CAN FD stack uses 4,608 logic elements on the Cyclone 10 LP target - 4.0× the 1,146 elements of the existing CAN Classic controller (Section 1.2). This growth is dominated by frame buffer scaling: the RX frame buffer grew from 120 bits (15 bytes, CAN Classic) to 560 bits (70 bytes, CAN FD), a 4.7× increase, driving the combinatorial decode and mux logic that represents the bulk of `can_mac_fsm`'s 4,109 LEs. Excluding the estimated buffer contribution, the protocol logic itself grew approximately 2.9× to deliver dual bit rate switching, TDC, three CRC polynomial variants, fixed bit stuffing with SBC, and full ISO 11898-1 fault confinement - a substantially larger feature set. Normalised for payload capacity, the FD design consumes 72 LEs per payload byte against 143 for CAN Classic, demonstrating better-than-linear scaling with respect to the 8× payload increase. The worst-case f_{max} of approximately 127 MHz on the slow corner exceeds the 40 MHz minimum required for a 5 Mbit/s data-phase clock at the ISO-minimum 8 TQ per bit by more than 3× (Section 9.2). The register-based frame buffer is the straightforward RTL choice but not the efficient one. At 15 bytes (120 bits) in the CAN Classic controller the address decode and read mux overhead is modest - an acceptable side-effect of the implementation approach. At 70 bytes (560 bits) both overhead terms scale proportionally, making them the dominant cost rather than a side-effect: the write-address decoder (the LUT logic that routes a byte index to the correct flip-flop's load enable) and the read mux (the LUT tree that selects the correct byte from 70 parallel register outputs) both grow with buffer depth, and at 70 entries each is large enough to dominate the module's LE count. Mapping the 70-byte buffer to a single block RAM instance would eliminate both the storage flip-flops and the combinatorial decode logic they feed, reducing `can_mac_fsm`'s footprint substantially and leaving only protocol and control logic in the LUT fabric (Section 10.2).

10.1 Objectives Assessment

The four objectives stated in Section 1.5 are assessed against the verification results.

CAN/CAN FD protocol controller in VHDL compliant with ISO 11898-1, supporting CB, CE, FB, and FE frames. The unified `can_mac_fsm` handles all four in-scope frame formats in both transmission and reception, including dual bit rate switching with Transmitter Delay Compensation in the FD data phase (REQ-024, REQ-025). 27 of 38 requirements are closed. The remaining 11 are LLC-layer requirements deferred pending `can_llc` implementation, one known P2 gap, or requirements with partial simulation coverage, all documented in Section 10.2.

ISO 11898-1 sub-layer structure enabling independent module verification. The layered decomposition was implemented as designed. Each module has a dedicated testbench and a disjoint requirement set. The five requirements labelled `system` correctly identified the scenarios requiring multi-module stimulus, confirming that the layer boundaries were drawn at the right points.

Structured requirements with traceability from ISO 11898-1 to testbench results. 38 requirements were derived from ISO 11898-1 normative clauses, each linked to its source section, verification method, testbench file, and assertion label. 27 are closed against passing testbenches or code inspection, establishing a direct traceable path from standard clause to verification artifact. The full plan is reproduced in Section C.

RTL design integrated via Avalon-ST interfaces into Everllence's existing FPGA infrastructure. The RTL source is written in portable VHDL-93 with no vendor primitives. Synthesis on a Cyclone 10 LP target confirmed timing closure at realistic system clock frequencies with 30% device utilization (Section 9). The Avalon-ST host interface is the responsibility of `can_llc`, which is not yet implemented. Its interface contracts are fully specified in the verification plan.

10.2 Future Work

1. **can_llc implementation.** The LLC sub-layer is the one unimplemented module. Its interface contracts are fully specified in REQ-001 through REQ-005, REQ-032, and REQ-037. Implementing it closes the Avalon-ST host interface and completes the full CAN node.
2. **Hardware integration and bring-up.** The implemented RTL has been verified in simulation only. Integration into Everllence's IO-extender FPGA design and bring-up on a physical CAN FD bus - including interoperability testing against a known-good CAN FD node - would validate timing closure, transceiver compatibility, and bit timing calibration under real bus conditions.
3. **CAN XL support.** CAN XL is explicitly out of scope for this project. The layered architecture and unified FSM are well-suited for extension: CAN XL adds a third bit rate phase and an XL-specific frame format, both of which map naturally onto additional PCS rate parameters and new `can_mac_fsm` states.
4. **Frame buffer block RAM migration.** The 70-byte RX frame buffer is implemented as a 560-bit flip-flop array, which is the primary driver of `can_mac_fsm`'s 4,109 LEs. A single M9K block RAM instance on the Cyclone 10 LP provides 9 Kbit of dedicated storage with negligible LUT overhead and is sufficient to hold the entire frame. The frame accumulation logic writes sequentially by byte index during reception, and `p_stream_to_LLC` reads sequentially during the post-EOF transfer - both access patterns map directly to single-port BRAM without any structural change to the surrounding FSM logic. This migration would reduce the LUT footprint to approximately the protocol-logic-only

estimate, making the resource cost proportional to CAN FD's actual protocol complexity rather than its frame size.

5. **Error-type-specific simulation coverage (REQ-021)**. The current testbench verifies bit-error detection through recessive injection at frame start. Sub-claims 2-5 (stuff, form, CRC, and ACK error detection) are covered by code inspection only. All four outstanding sub-claims require a frame-aware stimulus source. Stuff error must target a stuff bit, form error must target a fixed-format field, ACK error must target the ACK slot, and CRC error must target a non-fixed-form bit before the CRC field - an injection landing on a fixed-form bit would trigger a form error instead. Closing these sub-claims requires either the Everllence-internal CAN FD reference model with targeted error injection capability, or white-box FSM state signals exposed from `can_mac_fsm` to time the injection correctly.

11 Conclusion

This thesis presented the design, implementation, and verification of a CAN/CAN FD protocol controller in VHDL-93, structured around the ISO 11898-1 layered reference model. The implemented design covers the MAC, PCS, and FCE sub-layers as independently testable modules, supports all four in-scope frame formats (CB, CE, FB, FE), implements dual bit rate switching with Transmitter Delay Compensation, and integrates into Everllence's existing FPGA infrastructure via Avalon-ST interfaces. Of the 38 requirements derived from ISO 11898-1, 27 are closed against passing testbenches or code inspection. Of the remaining 11, eight fall outside the current scope pending `can_llc` integration, one is a lower-priority optional feature, and two represent identified future work: [REQ-021](#) (error-injection under passive error conditions) and [REQ-034](#) sub-claim 1 (lone-node bus re-integration). The design was synthesized on a Cyclone 10 LP FPGA target using 4,608 logic elements (30% of device) with a worst-case fmax of approximately 127 MHz, confirming timing closure at realistic system clock frequencies.

The project yielded three transferable lessons. First, the structure of a requirements model can inadvertently bias RTL architecture: the TX/RX side dimension of the verification plan made a split-path implementation appear well-motivated, but the frame structure of the CAN protocol is the same regardless of which node is driving, and cutting the natural code unit at an artificial seam added coordination complexity without reducing protocol complexity. Verification plan dimensions are inputs to testbench architecture, not to RTL decomposition. Second, the ISO 11898-1 layered architecture is not merely a documentary convenience - it is a practical partitioning of protocol complexity that, when followed in the implementation, enables each sub-layer to be implemented, verified, and debugged independently. The modular design produced here is maintainable over the long product lifecycles that motivate Everllence's decision to develop the protocol controller in-house. Third, targeted, schema-validated field updates to a structured artifact are safe for an LLM to perform incrementally. Full-file rewrites are not (Section 3.3). The narrow MCP write interface made AI-assisted maintenance of the verification plan safe and practical across all three project phases. The result is an IP core that Everllence owns outright - maintainable, verifiable, and extensible over the multi-decade service commitments that motivated the redesign.

12 References

- [1] Robert Bosch GmbH, “CAN specification version 2.0,” Robert Bosch GmbH, 1991.
- [2] F. Hartwich, “CAN with flexible data-rate,” in *Proceedings of the 13th international CAN conference (iCC 2012)*, 2012.
- [3] M. Jeřábek and P. Píša, “CTU CAN FD — open-source CAN FD IP core.” <https://github.com/Logic-Design-Services/CTU-CAN-FD>, 2019.
- [4] International Organization for Standardization, *Road vehicles — controller area network (CAN) conformance test plan — Part 1: Data link layer and physical signalling*. 2016.
- [5] Robert Bosch GmbH, “M_CAN — CAN FD protocol controller IP module.” <https://www.bosch-semiconductors.com/products/ip-modules/can-ip-modules/m-can/>, 2024.
- [6] AMD (Xilinx), “CAN FD controller — Vivado design suite product guide (PG223).” <https://docs.amd.com/r/en-US/pg223-canfd>, 2024.
- [7] CAST, Inc., “CAN FD protocol controller.” <https://www.cast-inc.com/interfaces/automotive-bus-controllers/can-ctrl>, 2024.
- [8] International Organization for Standardization, *Road vehicles — controller area network (CAN) — Part 1: Data link layer and physical coding sublayer*. 2024.
- [9] J. Charzinski, “Performance of the error detection mechanisms in CAN,” in *Proceedings of the 1st international CAN conference (iCC 1994)*, Mainz, Germany, 1994.
- [10] Texas Instruments, *TCAN1042-Q1 automotive CAN FD transceiver*. Texas Instruments, 2024. Available: <https://www.ti.com/lit/ds/symlink/tcan1042-q1.pdf>
- [11] A. Mutter, “Robustness of a CAN FD bus system — about oscillator tolerance and edge deviations,” in *Proceedings of the 14th international CAN conference (iCC 2013)*, Paris, France, 2013.
- [12] A. Mutter and F. Hartwich, “Advantages of CAN FD error detection mechanisms compared to classical CAN,” in *Proceedings of the 15th international CAN conference (iCC 2015)*, 2015.
- [13] Intel Corporation, “Quartus prime design software.” <https://www.intel.com/content/www/us/en/products/details/fpga/development-tools/quartus-prime.html>, 2024.
- [14] OSVVM Contributors, “OSVVM — open source VHDL verification methodology.” <https://osvvm.org>, 2024.
- [15] Aldec, Inc., “Riviera-PRO verification platform.” https://www.aldec.com/en/products/functional_verification/riviera-pro, 2024.
- [16] Sigasi, “Sigasi studio — HDL design environment.” <https://www.sigasi.com>, 2024.
- [17] A. Bybell, “GTKWave — wave viewer.” <https://gtkwave.sourceforge.net>, 2024.
- [18] WaveDrom Contributors, “WaveDrom — digital timing diagram.” <https://wavedrom.com>, 2024.
- [19] Mermaid Contributors, “Mermaid — diagramming and charting tool.” <https://mermaid.js.org>, 2024.
- [20] Anthropic, “Claude code.” <https://claude.ai/code>, 2025.
- [21] Intel Corporation, “Avalon interface specifications,” Intel Corporation, 683091, 2021. Available: <https://docs.altera.com/r/docs/683091/current>
- [22] J. Bergeron, “Verification planning,” in *Writing testbenches: Functional verification of HDL models*, 2nd ed., Kluwer Academic Publishers, 2003.

A Accompanying Digital Materials

The zip file accompanying this document contains the complete source tree developed during this project. The tables below identify the key files by category.

RTL source files

File	Description
src/can_types_p/hdl_src/can_types_p.vhd	Shared types package
src/can_mac/hdl_src/can_mac_fsm.vhd	Unified MAC FSM
src/can_mac/hdl_src/can_mac.vhd	MAC wrapper
src/can_mac_ser/hdl_src/can_mac_ser.vhd	TX serializer
src/can_mac_bs/hdl_src/can_mac_bs.vhd	Bit stuffer/destuffer
src/can_mac_crc/hdl_src/can_mac_crc.vhd	CRC engine
src/can_pcs/hdl_src/can_pcs.vhd	PCS (bit timing, sync, TDC)
src/can_fce/hdl_src/can_fce.vhd	Fault Confinement Entity
src/can_mac_pcs_fce/hdl_src/can_mac_pcs_fce.vhd	Synthesized top-level wrapper

Testbench files

File	Description
src/can_mac_ser/hdl_tb/can_mac_ser_tb.vhd	Serializer
src/can_mac_bs/hdl_tb/can_mac_bs_tb.vhd	Bit stuffer
src/can_mac_crc/hdl_tb/can_mac_crc_tb.vhd	CRC engine
src/can_pcs/hdl_tb/can_pcs_tb.vhd	PCS
src/can_fce/hdl_tb/can_fce_tb.vhd	FCE
src/can_mac_pcs_fce/hdl_tb/can_mac_pcs_fce_tb.vhd	MAC + PCS + FCE integration

Verification plan and tooling

File	Description
verification_plan/verification_plan.toml	38 requirements with traceability metadata
mcp_tools/verification_plan_manager.py	MCP server for verification plan maintenance

B Complete CAN Node Signal Interface

Complete signal-level connectivity of the implemented CAN node. The MAC sub-layer is expanded to show its four constituent entities (can_mac_fsm, can_mac_bs, can_mac_ser, can_mac_crc). PCS and

FCE appear as external module boundaries. The LLC interface block represents the Avalon-ST boundary to the LLC sub-layer, which is not implemented in this project.

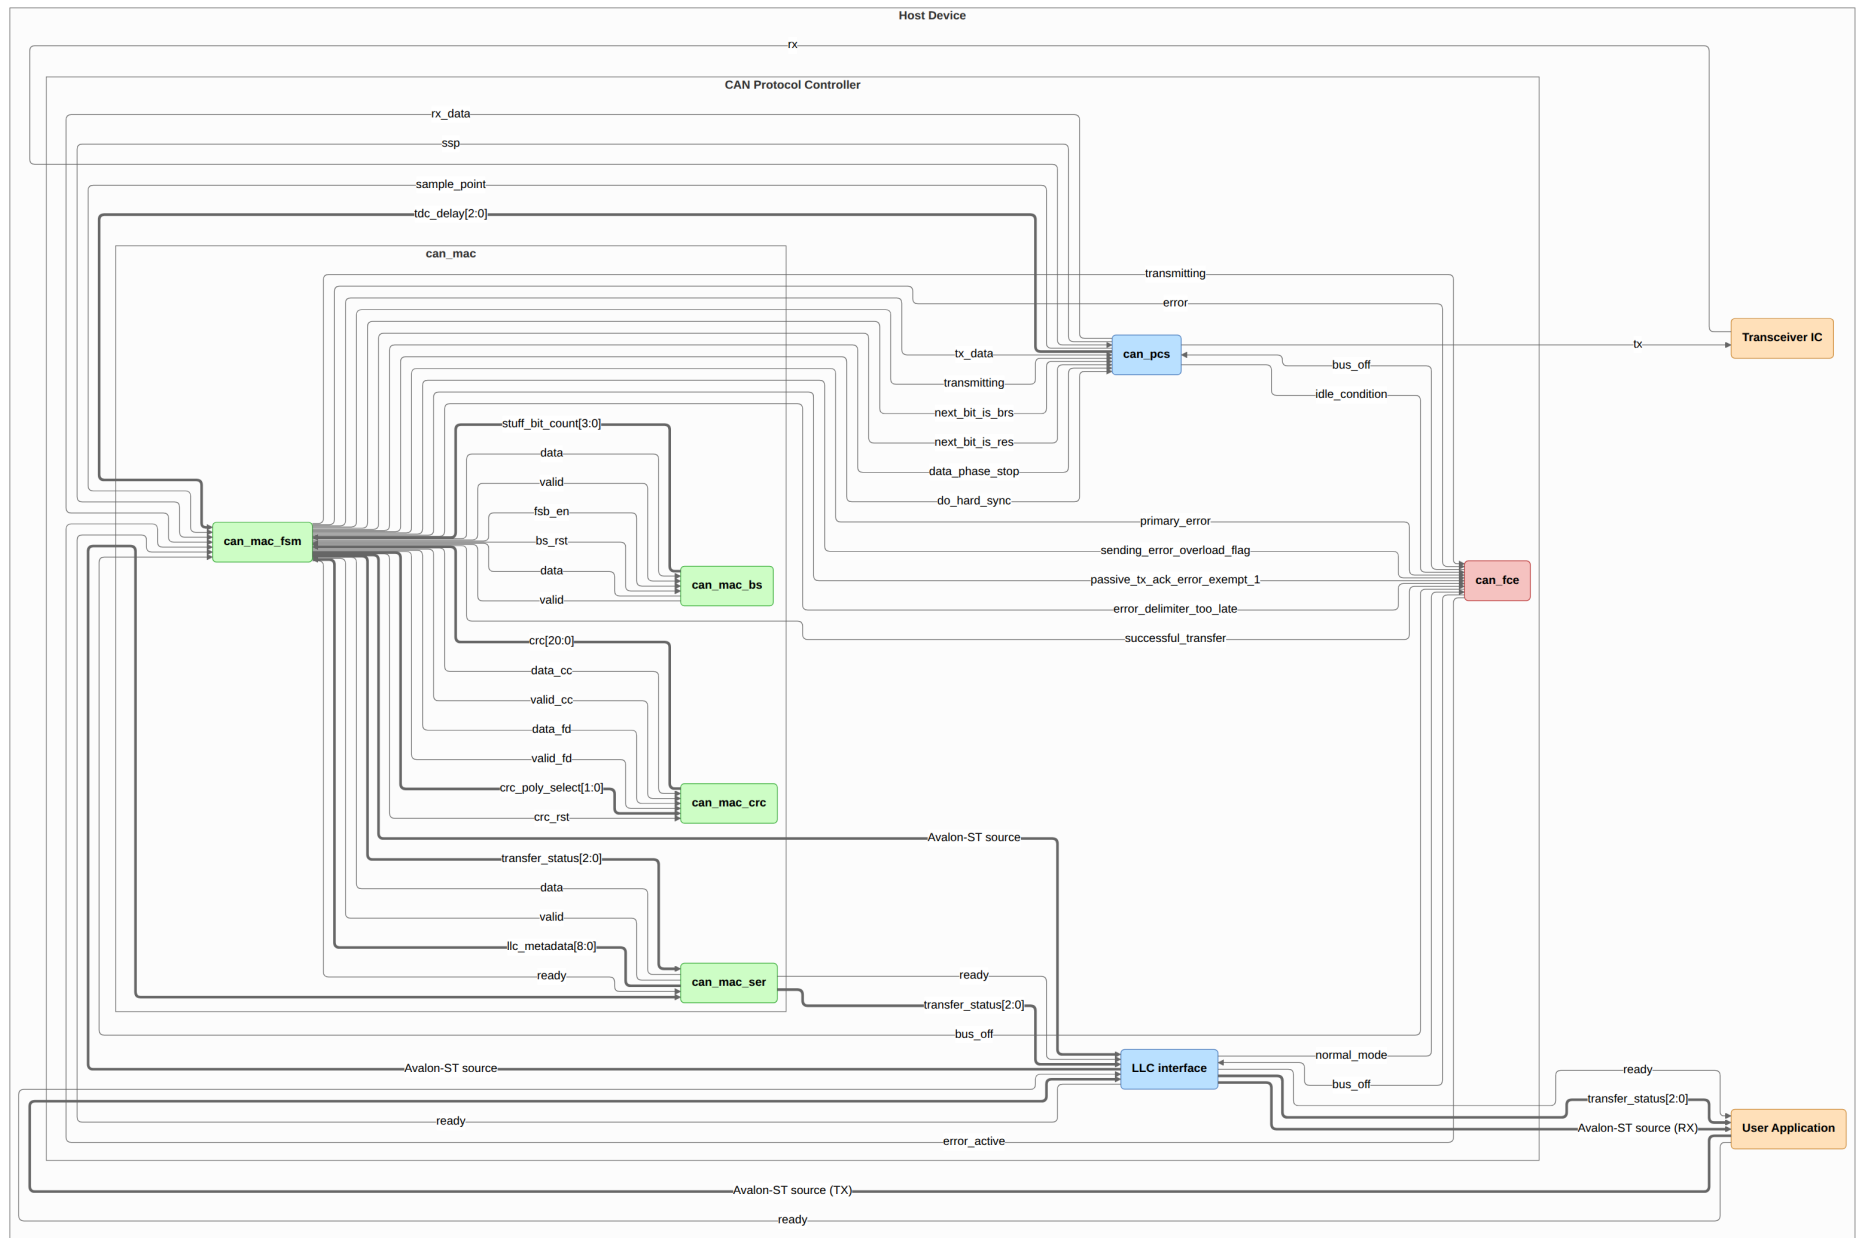


Figure 25: Complete CAN node signal-level connectivity. The MAC sub-layer is expanded to show its four internal entities. The LLC interface block is the Avalon-ST boundary to the pending LLC implementation.

C Verification Plan

Both tables are regenerated automatically from `verification_plan/verification_plan.toml` on each PDF build. The ID field is the join key between them. See Section 5.6 for the meaning of each field. The first table lists each requirement with its ISO source clause, priority, and paraphrase. The second table lists the verification metadata: layer, side, format applicability, observability, method, status, traceability label, file, and coverage criteria.

Table 10: ISO 11898-1 extracted requirements.

ID	ISO ref	Priority	Requirement	Notes
REQ-001	6.4.5.2	P1	LLC notification LLC shall notify the user on every successful DF/RF TX or RX.	Timestamping (§6.5.7) is optional per ISO and is out of scope.
REQ-002	6.4.5.5.2, 6.4.5.5.3	P2	LLC transmission request and abort timing 1) A TX request shall be processed no later than the second SOF after the request when no EFs are present. 2) Frames not yet passed to the MAC are aborted immediately. 3) An abort request shall be processed before the second SOF (no EFs present) or third SOF (with EFs present).	
REQ-003	6.5.2, 6.5.3	P1	Retransmission 1) Frames losing arbitration shall be retransmitted unless aborted by the LLC user. 2) Non-XL nodes shall support unlimited retransmissions.	
REQ-004	6.5.4	P3	Frame acceptance filtering 1) Receivers should use acceptance filtering to decide frame relevance. 2) Filtering should be a single self-contained operation with no state carry-over from previous frames.	
REQ-005	6.5.6	P1	LLC transfer status reporting LLC shall report five transfer status values: Ongoing, Transmitted, Lost_Arbitration, Disturbed, and Aborted, each reflecting the corresponding MAC sub-layer event.	
REQ-006	6.6.4.4	P1	CRC rules 1) CRC_15 for CC frames. CRC_17 for FD frames with payload ≤16 B. CRC_21 for FD frames with payload >16 B. 2) Init vector: all-zero for CRC_15. MSB-one for CRC_17 and CRC_21.	

ID	ISO ref	Priority	Requirement	Notes
REQ-007	6.6.5.2, 6.6.5.3, 6.6.6.2, 6.6.6.3	P1	Error and overload flags 1) Active error and overload flags: 6 consecutive dominant bits each. 2) Passive error flag: 6 consecutive recessive bits (may be overwritten by dominant bits from other nodes). 3) Error and overload delimiters: 8 recessive bits each. 4) After the flag, all nodes monitor the bus and simultaneously begin the remaining 7-bit delimiter on detecting the first recessive bit.	
REQ-008	6.6.7.1, 6.6.7.2, 6.6.7.3, 6.6.7.4, Figure 6, Figure 7	P1	Inter-frame space 1) Intermission shall be exactly 3 recessive bits. 2) No DF or RF may be started during intermission. 3) EFs and OFs shall not be preceded by inter-frame space. 4) Bus idle is recognised at the third recessive intermission bit (error-active nodes/receivers), the eighth recessive suspend bit (error-passive transmitters), or on leaving bus-integration state. 5) An error-passive transmitter shall suspend for 8 bit times after intermission. If another node transmits during the suspend window, the node shall become a receiver.	
REQ-009	6.6.7.5	P1	Bus re-integration 1) Nodes shall start bus re-integration on protocol startup or bus-off recovery. 2) Re-integration completes after 11 consecutive recessive bits at the sample point. 3) For FD-capable nodes, any synchronisation-causing edge shall reset the 11-bit recessive-bit counter.	
REQ-010	6.6.7.3, 6.6.8, Figure 10, Figure 11	P1	Frame initiation 1) A node shall send SOF only when the bus is idle. 2) A dominant third intermission bit causes a node with a pending frame (if error-active or previous receiver) to skip SOF and begin arbitration immediately. 3) A dominant bit detected during bus idle shall be interpreted as SOF.	

ID	ISO ref	Priority	Requirement	Notes
REQ-011	6.6.10.1, 6.6.10.4, Figure 10, Figure 11, Figure 12, Figure 13	P2	Remote frame RF DLC indicates the requested data length of the corresponding DF.	
REQ-012	6.6.10.2, 6.6.11.2, Figure 12, Figure 13, Figure 18, Figure 19	P1	SRR and RRS reserved bits 1) Receivers shall accept recessive and dominant SRR bits without form error. 2) Receivers shall accept recessive and dominant RRS bits without form error.	
REQ-013	6.6.10.5, 6.6.11.5	P1	CRC bit stream coverage 1) CC: SOF, arbitration, control, and data fields (dynamic stuff bits excluded). 2) FD: SOF, arbitration, control, data, dynamic stuff bits, and stuff count field (fixed stuff bits excluded).	
REQ-014	6.6.10.6, 6.6.11.6, 6.6.14, Figure 17	P1	Frame acknowledgement 1) Receivers shall ACK consistent frames and flag inconsistent frames with an EF. 2) Transmitters shall flag unacknowledged frames with an EF. 3) FD frames tolerate up to a 2-bit dominant ACK overlap to compensate for receiver phase differences. 4) ACK shall not depend on the frame identifier.	
REQ-015	6.6.11.3, Figure 20, Figure 21	P2	ESI bit transmission 1) Recessive when the LLC ESI flag is set. 2) Dominant when LLC ESI flag is clear and the node is error-active. 3) Recessive when LLC ESI flag is clear and the node is error-passive.	
REQ-016	6.6.11.5, Table 8	P1	Stuff bit count (SBC) field 1) SBC: 3-bit Gray-coded count of dynamic stuff bits (0-7) plus parity bit, placed before the CRC field. 2) TX shall transmit its dynamic stuff-bit count (up to the first FSB) as the SBC field. 3) RX shall verify the received SBC against its own count.	

ID	ISO ref	Priority	Requirement	Notes
REQ-017	6.6.10.5, 6.6.11.5, Figure 16, Figure 22, Figure 23	P1	CRC delimiter 1) CC frames: exactly one recessive CRC delimiter bit. 2) FD frames: transmitter sends one recessive bit. A second recessive bit is tolerated before the ACK slot.	
REQ-018	6.6.13.1, 6.6.13.2, 6.6.13.3.1, Table 10	P1	Bit stuffing 1) After 5 consecutive identical bits, insert a complementary dynamic stuff bit. RX discards it. 2) CC: dynamic stuffing spans SOF to FCRC. FD: SOF to end of data field. ACK and EOF are not stuffed. 3) FD CRC field: a fixed stuff bit precedes the SBC field and follows every fourth CRC bit, each the inverse of the preceding bit. No double stuffing. 4) RX discards FSBs and flags a form error if an FSB matches the preceding bit.	
REQ-019	6.6.10.7, 6.6.11.7, 6.6.15.2, Figure 8, Figure 9	P1	End of frame (EOF) 1) A receiver shall validate a frame after the sixth EOF bit. 2) A transmitter requires all seven EOF bits to be error-free.	
REQ-020	6.6.10.2, 6.6.11.2, 6.6.17.4, 6.6.17.5, Figure 10, Figure 11, Figure 12, Figure 13, Figure 18, Figure 19	P1	Bus arbitration Recessive-sent, dominant-monitored: lose arbitration and become a receiver.	

ID	ISO ref	Priority	Requirement	Notes
REQ-021	6.6.21.2	P1	MAC error detection 1) Bit error: sent/monitored mismatch. Exceptions: recessive non-stuff bit during arbitration, recessive bit in ACK slot, dominant bit while sending a passive error flag. 2) Stuff error: sixth consecutive identical bit in a dynamically-stuffed field. 3) Form error: unexpected fixed-form bit value, or FSB not inverse of preceding bit (FB/FE). Exception: dominant last EOF bit or last delimiter bit is not a form error. 4) CRC error: CRC mismatch. FD also requires SBC match and correct parity. 5) ACK error: transmitter detects no dominant bit in the ACK slot.	Sub-claim 1 (bit error) is simulation-verified via recessive injection in test_bus_off. Sub-claims 2-5 require frame-aware error injection not available in the current testbench. All four are covered by code inspection only.
REQ-022	6.6.21.3.1, Figure 28, Figure 29, Figure 30, Figure 31	P1	Error flag initiation and CRC error behaviour 1) On any detected error, start an EF at the next bit and inform the LLC. 2) Data-phase errors: switch to nominal bit rate before starting the EF. 3) CRC error: receiver withholds ACK and sends an EF at the first EOF bit (CC) or 3 bit-times after the CRC delimiter (FD).	
REQ-023	6.6.21.3.2	P1	Overload frame 1) LLC-requested OF: optional, starts at the first intermission bit, at most 2 per inter-frame space. 2) Reactive OF: triggered by a dominant bit at the first two intermission bits, the last EOF bit (receivers only), or the last error/overload delimiter bit. Starts one bit after the trigger.	

ID	ISO ref	Priority	Requirement	Notes
REQ-024	7.3.2, 7.3.3, Table 13, Figure 32	P1	PCS bit timing configuration 1) TQ is a fixed time unit derived from the node clock period. $TQ = m \times t_{q,min}$ where m is a programmable integer prescaler and $t_{q,min}$ = one clock period. 2) A bit time consists of four segments: Sync_Seg (1 TQ), Prop_Seg (compensates for bus propagation and node delays), Phase_Seg1, and Phase_Seg2. The sample point falls at the end of Phase_Seg1. 3) IPT (Information Processing Time): the time a node requires to determine the bit value after sampling. $IPT \leq 2 TQ$. 4) Separate nominal and FD data bit rate configurations, each based on a programmable integer prescaler.	Deployment constraints on the system, not RTL behaviors: prop_seg, SJW, Phase_Seg2, and oscillator tolerance must be programmed to meet the bounds in §7.3.2, §7.3.3, and §7.3.6. Minimum configuration ranges are given in Table 13 (§7.3.3).
REQ-025	7.3.4, 6.6.21.3.1, Figure 34, Figure 35	P1	Transmitter delay compensation 1) TDC applies in the FD data phase when BRS is recessive. Enable and prescaler (1 or 2) are programmable. 2) SSP position = measured transmitter delay + configured offset. 3) TDC active: bit errors at the SP are ignored. SSP errors are flagged at the following SP.	

ID	ISO ref	Priority	Requirement	Notes
REQ-026	7.3.5.1, 7.3.5.2, 7.3.5.3, 7.3.5.4, Figure 33	P1	PCS synchronisation 1) Phase error: the time interval between a recessive-to-dominant edge and the Sync_Seg boundary of the current bit time. Positive when the edge falls after Sync_Seg (late), negative when before (early). 2) SJW (Synchronization Jump Width): the maximum amount by which Phase_Seg1 or Phase_Seg2 may be adjusted per resynchronization. 3) One synchronisation per bit time, re-enabled after the next recessive SP. 4) Only recessive-to-dominant edges qualify. An edge qualifies only if the previous SP was recessive and no positive phase error exists while sending dominant. 5) Hard sync: IFS edges (except first intermission bit), bus-integration, and FDF-to-res transition. Restarts bit time with Sync_Seg completed, unconstrained by SJW. 6) All other qualifying edges cause resync, except for the transmitter during the FD data phase. Positive error: Phase_Seg1 $\neq$ SJW. Negative error: Phase_Seg2 $\neq$ SJW. Error $\leq$ SJW: same effect as hard sync.	RTL is stricter than ISO: mac_i.transmitting suppresses all sync unconditionally, not just resync on positive phase error. Safe since the transmitter is the timing source.
REQ-027	6.6.7.5, 7.4.2.2, 7.4.2.3, 8.1.4.4	P1	PCS bus-off isolation and signalling 1) During bus-off, the PCS shall not drive dominant bits. 2) PCS enters bus-off on a supervisor request and exits on a release request.	
REQ-028	8.1.3.1, 8.1.3.2, Table 14, Table 15, Figure 42	P1	FCE reset and response 1) TEC and REC shall both be reset to zero when the FCE enters its initial state.	

ID	ISO ref	Priority	Requirement	Notes
REQ-029	8.1.4.2 rule a), rule b), rule c), rule d), rule e), rule f), rule g), rule h)	P1	Error counter rules 1) REC +1 on any receiver-detected error (except bit errors during error/overload flag). 2) REC +8: first dominant bit after sending an error flag, or bit error while sending an active error/overload flag. 3) REC -1 on successful RX if 1-127. Stays 0 if already 0. Set to 119-127 if above 127. 4) TEC +8 when sending an error flag. Exceptions: error-passive ACK error, pre-arbitration stuff error. 5) TEC +8 on bit error while sending an active error or overload flag. 6) TEC -1 on successful TX (floor 0). 7) After 14 consecutive dominant bits post active error/overload flag (8 post passive error flag): both +8. Each additional 8 dominant bits: both +8.	
REQ-030	8.1.4.3, 8.1.4.4, 8.1.3.2, Figure 43	P1	Error confinement state transitions 1) Error-passive when either error counter > 127. Error-active restored when both ≤ 127 . 2) TEC > 255 causes bus-off. 3) Bus-off recovery requires 128 idle conditions. Both counters reset to zero on recovery. 4) FCE shall notify the LLC on entering bus-off state.	Sub-claim 4: bus-off recovery requires 128 separate idle detections (128×11 recessive bits), not 128 consecutive recessive bits.
REQ-031	6.6.11.3, Figure 20, Figure 21	P1	BRS bit rate switching 1) Recessive BRS: switch to FD data rate at the BRS sample point. Dominant BRS: keep nominal rate. 2) Rate switches back to nominal at the first CRC delimiter sample point.	
REQ-032	6.4.3, 6.4.4, Table 5	P1	DLC byte-count mapping DLC 0-8: linear mapping. FD: DLC 9 $\rightarrow$ 12, 10 $\rightarrow$ 16, 11 $\rightarrow$ 20, 12 $\rightarrow$ 24, 13 $\rightarrow$ 32, 14 $\rightarrow$ 48, 15 $\rightarrow$ 64 bytes. CC: DLC 9-15 clamped to 8 bytes.	

ID	ISO ref	Priority	Requirement	Notes
REQ-033	6.6.16	P1	Byte/Bit transmission order Within the data field byte 0 is sent first. Within each byte bit(7) is sent first.	
REQ-034	8.1.5, Figure 7	P1	Node start-up 1) A node shall complete bus re-integration (11 consecutive recessive bits) before transmitting. 2) A single node receiving no ACK becomes error-passive but never bus-off.	Sub-claim 2 verified via FCE Exception 1 mechanism (passive_tx_ack_error_exempt_1) in can_fce_tb.
REQ-035	6.6.18	P1	MAC data consistency Frames shall be fully buffered before transmission starts.	
REQ-036	6.6.21.1, 6.6.21.4	P2	Error signalling enable A configuration parameter shall exist to enable or disable error signalling.	
REQ-037	6.4.4	P3	DLC padding An LLC restricted to fewer bytes shall replace excess bytes with 0xCC padding in both TX and RX directions.	Only applicable if the implementation exposes a configurable maximum-data-byte restriction. If not implemented, waive.

ID	ISO ref	Priority	Requirement	Notes
REQ-038	5.2, Figure 2	P1	Frame field sequence 1) CBFF DF: SOF (D) → Arbitration (ID[28:18], RTR (D)) → Control (IDE (D), r0 (D), DLC[3:0]) → Data → CRC (CRC_15, delimiter (R)) → ACK (slot, delimiter (R)) → EOF (7×R). 2) CBFF RF: as CBFF DF but RTR (R) and no data field. 3) CEFF DF: SOF (D) → Arbitration (ID[28:18], SRR (R), IDE (R), ID[17:0], RTR (D)) → Control (r1 (D), r0 (D), DLC[3:0]) → Data → CRC (CRC_15, delimiter (R)) → ACK (slot, delimiter (R)) → EOF (7×R). 4) CEFF RF: as CEFF DF but RTR (R) and no data field. 5) FBFF DF: SOF (D) → Arbitration (ID[28:18], RRS (D)) → Control (IDE (D), FDF (R), res (D), BRS, ESI, DLC[3:0]) → Data (FD rate) → CRC (SBC[3:0], CRC_17/21, delimiter (R)) → ACK (slot, delimiter (R)) → EOF (7×R). 6) FEFF DF: SOF (D) → Arbitration (ID[28:18], SRR (R), IDE (R), ID[17:0], RRS (D)) → Control (FDF (R), res (D), BRS, ESI, DLC[3:0]) → Data (FD rate) → CRC (SBC[3:0], CRC_17/21, delimiter (R)) → ACK (slot, delimiter (R)) → EOF (7×R).	Notation: (D) = dominant, (R) = recessive. Unannotated bits (ID, DLC, BRS, ESI, CRC value, SBC, ACK slot) are data-dependent or conditional.

Table 11: ISO 11898-1 verification plan.

ID	Layer	Side	Format	Observability	Method	Status	Label	File	Coverage criteria
REQ-001	LLC	both	CB, CE, FB, FE	black_box	simulation	not_started			
REQ-002	LLC	transmitter	CB, CE, FB, FE	white_box	code_inspection	not_started			
REQ-003	LLC	transmitter	CB, CE, FB, FE	white_box	code_inspection	not_started			
REQ-004	LLC	receiver	CB, CE, FB, FE	white_box	code_inspection	not_started			
REQ-005	LLC	transmitter	CB, CE, FB, FE	black_box	simulation	not_started			
REQ-006	MAC	both	CB, CE, FB, FE	white_box	simulation, coverage	complete	crc_15, crc_17, crc_21	can_mac_crc_tb	Three bins: (1) CB or CE frame (CRC_15), (2) FB or FE frame with data ≤ 16 B (DLC ≤ 10 , CRC_17), (3) FB or FE frame with data > 16 B (DLC ≥ 11 , CRC_21) - must each be hit.
REQ-007	system	both	CB, CE, FB, FE	white_box	code_inspection, wave-form_inspection	complete	p_fsm:~900, test_bus_off	can_mac_pcs_fce_tb	
REQ-008	MAC	both	CB, CE, FB, FE	white_box	code_inspection, wave-form_inspection	complete	p_fsm:~486, test_normal, test_bus_off	can_mac_pcs_fce_tb	
REQ-009	system	both	CB, CE, FB, FE	white_box	code_inspection, wave-form_inspection	complete	p_fsm:~433, test_bus_off	can_mac_pcs_fce_tb	

ID	Layer	Side	Format	Observability	Method	Status	Label	File	Coverage criteria
REQ-010	MAC	both	CB, CE, FB, FE	white_box	code_inspection, wave-form_inspection	complete	p_fsm::~451, test_normal	can_mac_pcs_fce_tb	
REQ-011	MAC	both	CB, CE	black_box	simulation	complete	FTYP Coverage	can_mac_pcs_fce_tb	
REQ-012	MAC	both	CE, FB, FE	white_box	code_inspection, wave-form_inspection	complete	p_fsm::~546, p_fsm::~548, test_normal	can_mac_pcs_fce_tb	
REQ-013	MAC	both	CB, CE, FB, FE	white_box	code_inspection	complete	p_fsm::~299, p_fsm::~216	can_mac_fsm	
REQ-014	system	both	CB, CE, FB, FE	white_box	simulation, wave-form_inspection	complete	test_normal	can_mac_pcs_fce_tb	
REQ-015	MAC	transmitter	FB, FE	white_box	simulation, wave-form_inspection	complete	test_normal	can_mac_pcs_fce_tb	
REQ-016	MAC	both	FB, FE	black_box	simulation	complete	p_sbc_checker	can_mac_bs_tb	
REQ-017	MAC	transmitter	CB, CE, FB, FE	white_box	code_inspection, wave-form_inspection	complete	p_fsm::~768, p_fsm::~796, test_normal	can_mac_pcs_fce_tb	
REQ-018	MAC	both	CB, CE, FB, FE	white_box	simulation, coverage	complete	Input Coverage, Output Coverage	can_mac_bs_tb	All bins in cov_input and cov_output must be hit.
REQ-019	MAC	both	CB, CE, FB, FE	white_box	simulation	complete	test_normal	can_mac_pcs_fce_tb	
REQ-020	system	transmitter	CB, CE, FB, FE	black_box	simulation	complete	test_lost_arb	can_mac_pcs_fce_tb	
REQ-021	MAC	both	CB, CE, FB, FE	white_box	code_inspection, wave-form_inspection	in_progress	p_fsm::~283, p_fsm::~336, p_fsm::~343, p_fsm::~415, test_bus_off	can_mac_pcs_fce_tb	

ID	Layer	Side	Format	Observability	Method	Status	Label	File	Coverage criteria
REQ-022	MAC	both	CB, CE, FB, FE	white_box	code_inspection, wave-form_inspection	complete	p_fsm::~283, p_fsm::~294, p_fsm::~357, test_bus_off	can_mac_pcs_fce_tb	
REQ-023	MAC	both	CB, CE, FB, FE	white_box	code_inspection	complete	p_fsm::~370	can_mac_fsm	
REQ-024	PCS	both	CB, CE, FB, FE	white_box	simulation	complete	test_normal	can_pcs_tb	
REQ-025	PCS	transmitter	FB, FE	black_box	simulation	complete	p_check_tdc_delay	can_pcs_tb	
REQ-026	PCS	both	CB, CE, FB, FE	white_box	code_inspection, wave-form_inspection	complete	p_can_pcs::~177, p_can_pcs::~228, test_normal	can_pcs_tb	
REQ-027	PCS	both	CB, CE, FB, FE	white_box	simulation, code_inspection	complete	p_can_pcs::~280, p_can_pcs::~379, test_bus_off	can_mac_pcs_fce_tb	
REQ-028	FCE	both	CB, CE, FB, FE	black_box	simulation	complete	test_reset, test_bus_off_recovery	can_fce_tb	Sub-claim 1: TEC/REC reset shall take effect within one clock cycle of the request. Sub-claim 2: verify that Normal_mode_response is asserted after reset completes.

ID	Layer	Side	Format	Observability	Method	Status	Label	File	Coverage criteria
REQ-029	FCE	both	CB, CE, FB, FE	black_box	simulation	complete	test_rule_a, test_rule_b, test_rule_c, test_rule_c_exception, test_rule_d, test_rule_e, test_rule_f_tx, test_rule_f_rx, test_rule_g, test_rule_h	can_fce_tb	Rule h: the '>127 → 119-127' clamp path must be explicitly confirmed in simulation.
REQ-030	FCE	both	CB, CE, FB, FE	black_box	simulation	complete	test_bus_off, test_bus_off_recovery	can_fce_tb	
REQ-031	MAC	both	FB, FE	white_box	code_inspection, wave- form_inspection	complete	p_fsm::~636, p_fsm::~755, test_normal	can_mac_pcs_fce_tb	
REQ-032	LLC	both	CB, CE, FB, FE	black_box	simulation, coverage	not_started			Four non-linear FD DLC values (9, 12, 14, 15 → 12, 24, 48, 64 bytes) plus DLC=8 boundary must each produce a correctly sized frame.
REQ-033	MAC	both	CB, CE, FB, FE	black_box	simulation	complete	test_normal	can_mac_pcs_fce_tb	

ID	Layer	Side	Format	Observability	Method	Status	Label	File	Coverage criteria
REQ-034	system	both	CB, CE, FB, FE	black_box	simulation	complete	test_rule_c_exception; normal_test, test_bus_off (waveform)	can_mac_pcs_fce_tb	Sub-claim 1: confirm no TX before 11 consecutive recessive bits are detected at the SP. Sub-claim 2: single-node scenario with no ACK injection; TEC must reach error-passive but not exceed 255.
REQ-035	MAC	transmitter	CB, CE, FB, FE	white_box	code_inspection	not_started			
REQ-036	MAC	both	CB, CE, FB, FE	white_box	code_inspection	not_started			
REQ-037	LLC	both	CB, CE, FB, FE	black_box	simulation	not_started			
REQ-038	MAC	both	CB, CE, FB, FE	white_box	waveform_inspection	complete	test_normal	can_mac_pcs_fce_tb	