

Welcome to Teensy 3.2

32 Bit Arduino-Compatible Microcontroller

To begin using Teensy, please visit the website & click [Getting Started](http://www.pjrc.com/teensy).

www.pjrc.com/teensy

Digital Pins

digitalRead
digitalWrite
pinMode

Analog Pins

analogRead
analogReference
analogReadRes

PWM Pins

analogWrite
analogWriteRes

Touch Sense Pins

touchRead

Serial Ports


Serial1
Serial2
Serial3

I²C Port

Wire Library

SPI Port


SPI Library

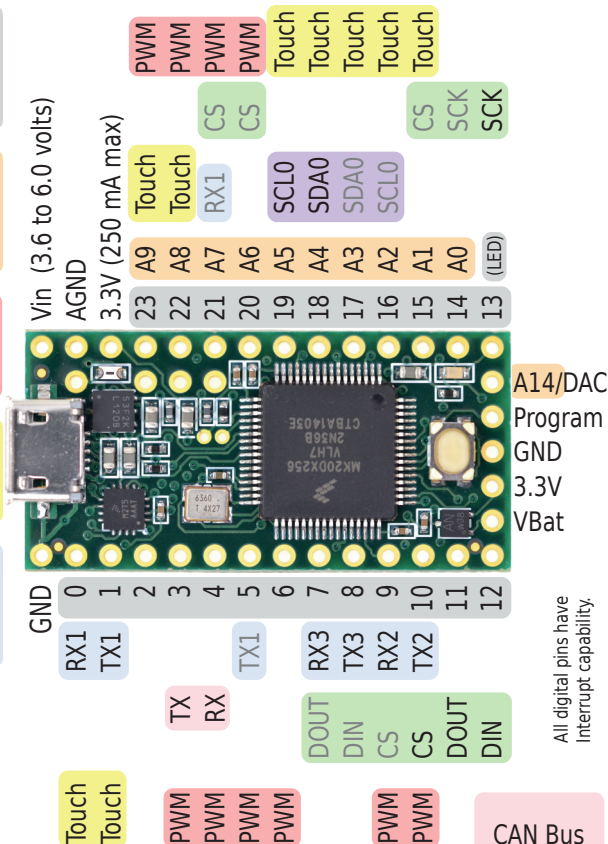

All digital pins have
Interrupt capability.

Teensy 3.2 Back Side

Additional pins and features available on the back side

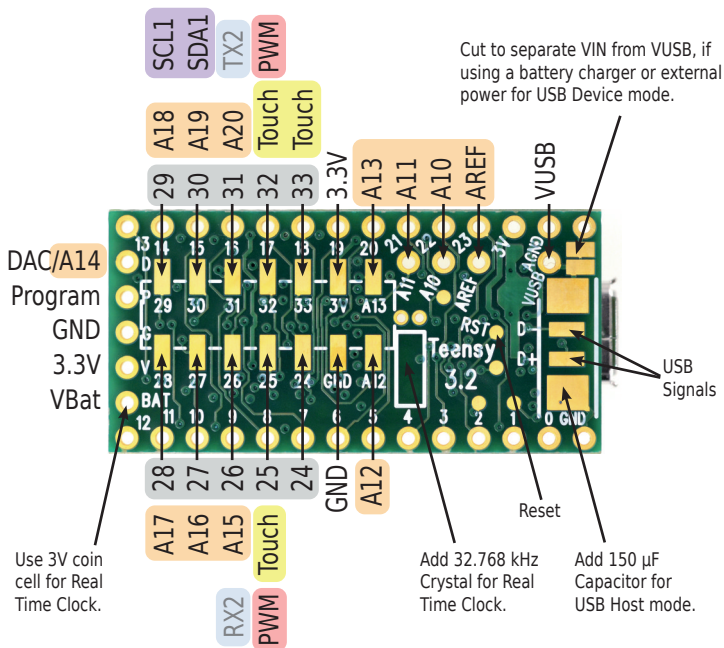

For solutions to the most common issues
and technical support, please visit:

www.pjrc.com/help

Teensy 3.2 System Requirements:

PC computer with Windows 7, 8, 10 or later
or Ubuntu Linux 12.04 or later
or Macintosh OS-X 10.7 or later
USB Micro-B Cable

