

Neck




Middle

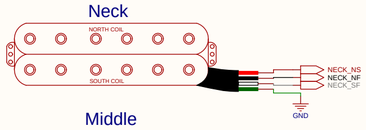


Bridge



Superswitch




Ultraswitch






Pickup is active
If humbucker: internally wired in series




Humbucker wired in parallel



Pickup is out-of-phase




Single Coil Simulation engaged

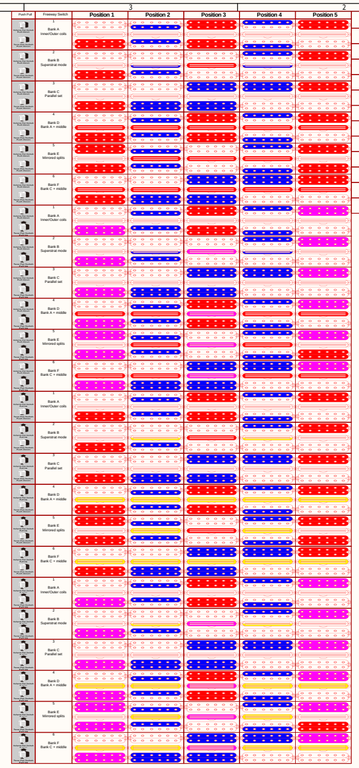


Bill of Materials	
Item	Quantity
5-Way 6-Pole AxLabs Superswitch	1
6-Way Dual-Axis Freeway Ultraswitch	1
A500K Push/Pull Potentiometer	2
12-Pin ON ON Toggle Switch	1
2-Pin Momentary Switch	1
Output Jack	1
150 kΩ Resistor	1
1.5 kΩ Resistor	1
680 pF Capacitor	1
33 nF Capacitor	1
100 nF Capacitor	2

Superswitch

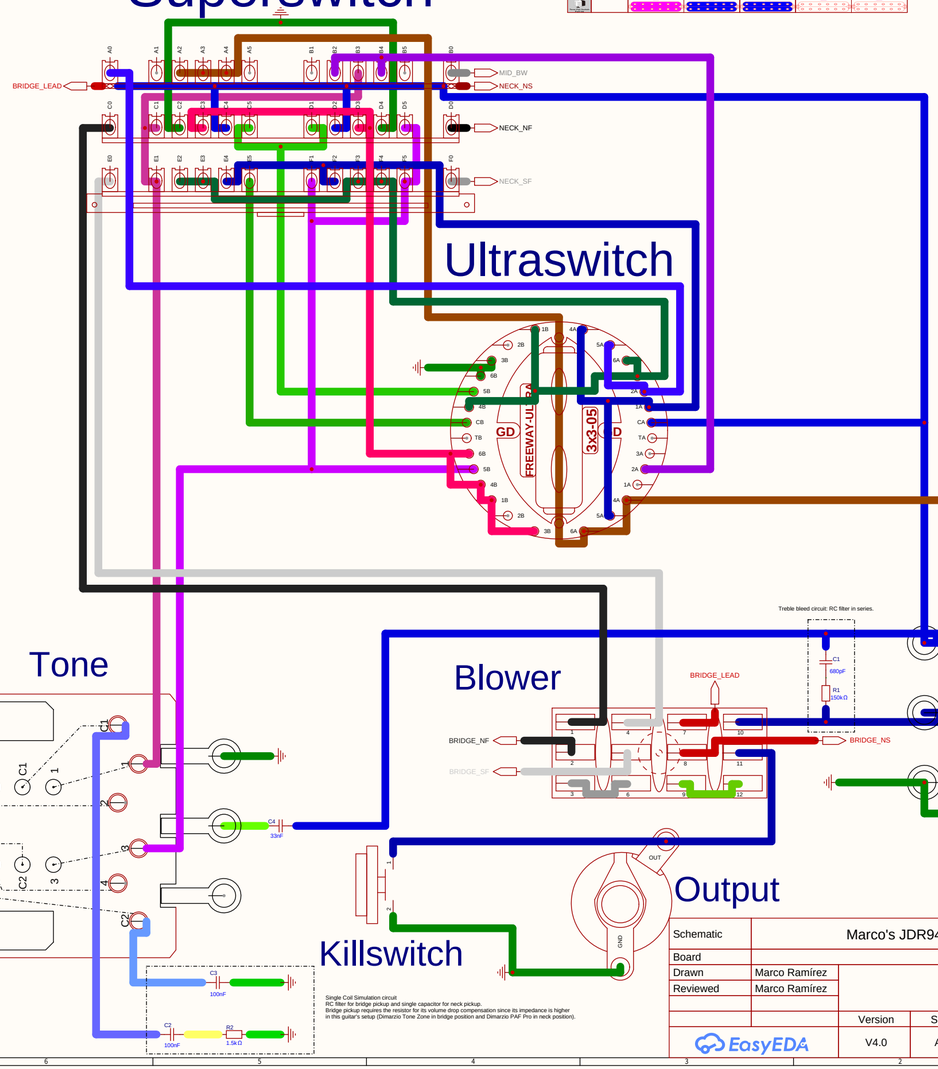

Ultraswitch

Tone




Single Coil Simulation circuit
RC filter for bridge pickup and single capacitor for neck pickup.
Bridge pickup requires the resistor for its volume drop compensation since its impedance is higher in this guitar's setup (Dimarzio Tone Zone in bridge position and Dimarzio PAF Pro in neck position).

Blower

Treble bleed circuit: RC filter in series.

Volume



Killswitch

Output

Schematic	Marco's JDR94	Create at	2026-10-24
		Update at	2026-11-03
Board		Page	P1
Drawn	Marco Ramírez	Guitars	
Reviewed	Marco Ramírez		
		Version	Size	Page 1 Total 1
EasyEDA		V4.0	A3	EasyEDA.com