

Main rails +/−28 V (T1, 400 VA, 2 x 20 VAC)

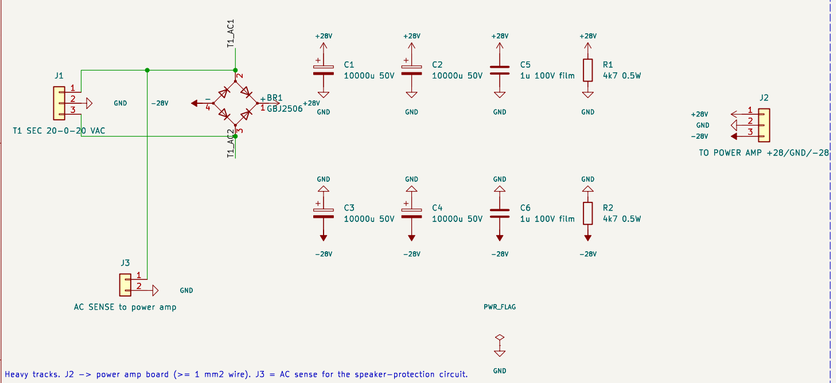


Heavy tracks. J2 -> power amp board (>= 1 mm2 wire). J3 = AC sense for the speaker-protection circuit.

HV raw supply (T2, 2 x 40 VAC)

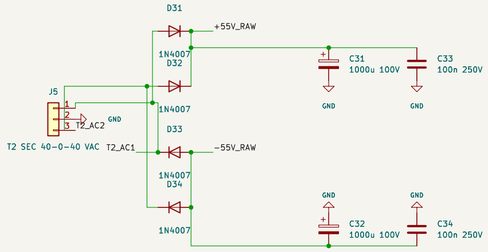


1N4007 bridge, 1000 uF 100 V per rail: about +/−55 V raw.

+15 V regulator (fed from +28 V)

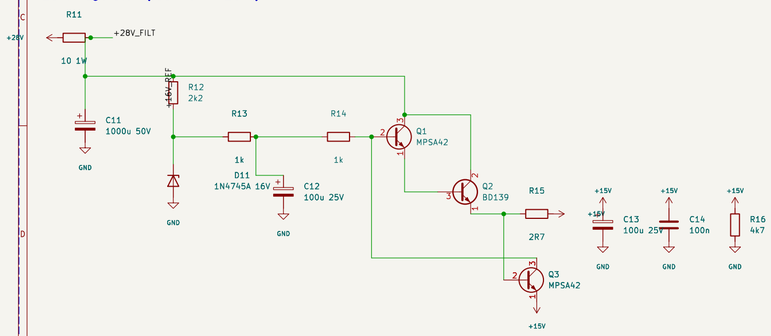


16 V zener reference, RC filtered; Q3 limits at ~240 mA. Output ~ +14.8 V.

+40 V regulator (discrete)

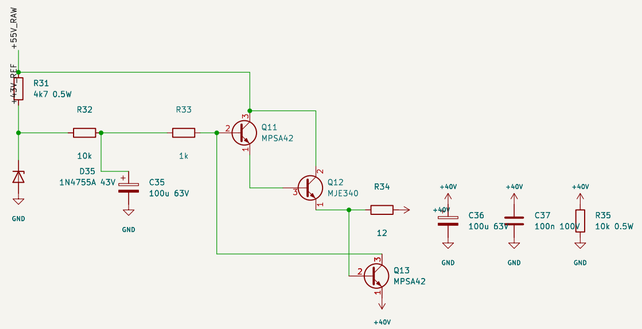


43 V zener reference, RC soft start, MPSA42 + MJE340 Darlington, Q13 limits at ~55 mA. Output ~ +41.6 V.

−15 V regulator (fed from −28 V)

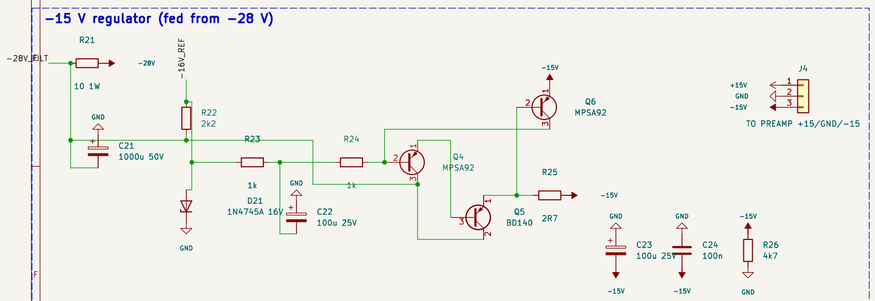

Mirror of the +15 V regulator. J4 -> preamp J1.

−40 V regulator (discrete)

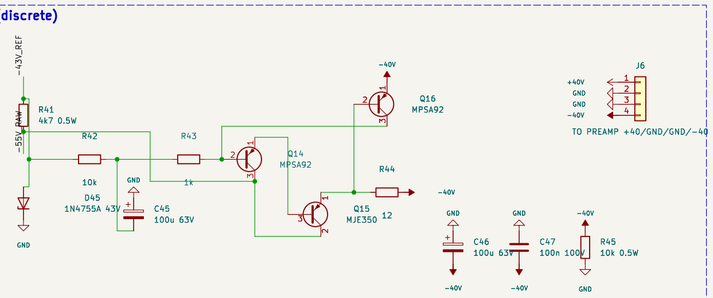

Mirror: MPSA92 + MJE350. Output ~ −41.6 V. J6 -> preamp J2.

Q12/Q15 (MJE340/MJE350) and Q2/Q5 (BD139/BD140) need small clip-on heatsinks.
BR1: GBJ2506 25 A - check the footprint pitch against your part; small heatsink.
T1: 400 VA toroid 2 x 20 VAC. T2: 15-30 VA 2 x 40 VAC. Centre taps to GND; star point = C1-C4 ju
Mains wiring (IEC inlet, fuse T3.15A/230V or T6.3A/115V, switch, 5 R NTC) is chassis-wired, not on t

Sheet: /
File: psu.kicad_sch

Title: Bass amp PSU board: +/−28 V, +/−40 V (discrete reg), +/−15 V (di

Size: A2	Date:	Rev: 1
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1