
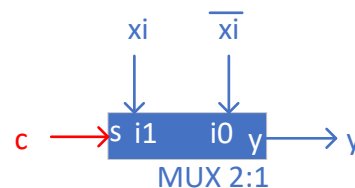


Arie logica programabila $F(x_0, x_1, x_2) = y$

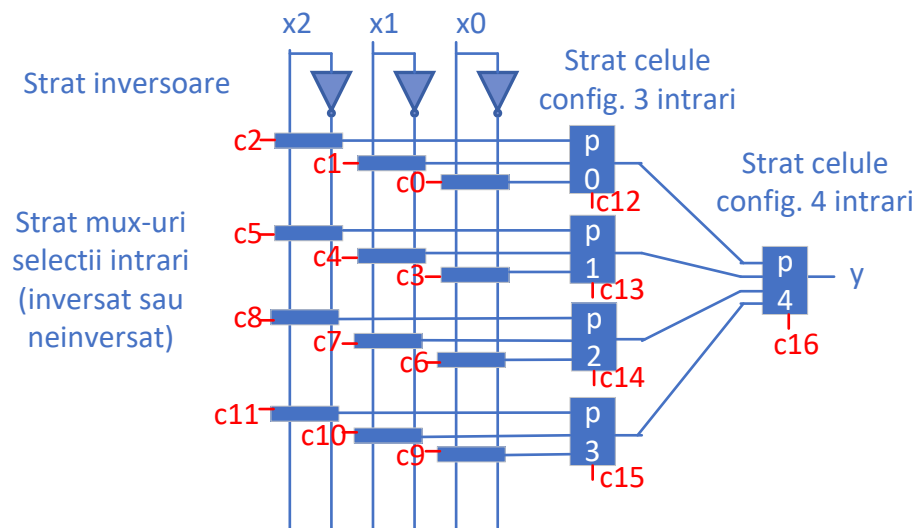

Implementare functii logice

c16	c15	c14	c13	c12	c11	c10	c9	c8	c7	c6	c5	c4	c3	c2	c1	c0
F P4	F P3	F P2	F P1	F P0	Sel. xi /xi P3	Sel. xi /xi P2	Sel. xi /xi P1	Sel. xi /xi P0								

Sel. xi /xi Pj – selectie intrare xi sau intrare xi negat pentru poarta Pj j:0..3. Fiecare grup de 3 biti va fi alocat astfel b2b1b0 – b0 selectie x0 sau x0 negat, b1 selectie x1 sau x1 negat, b2 selectie x2 sau x2 negat. Cand bitul b este 0 este selectat xi negat, cand bitul b este 1 este selectat xi

F Pj j:0..4 : selectie functie logica pentru poarta j. Daca intrarea este 0 atunci este functia SI iar daca intrarea este 1 atunci functia este SAU