


PedalPCB

Provocateur Fuzz

Revision 12.27.19

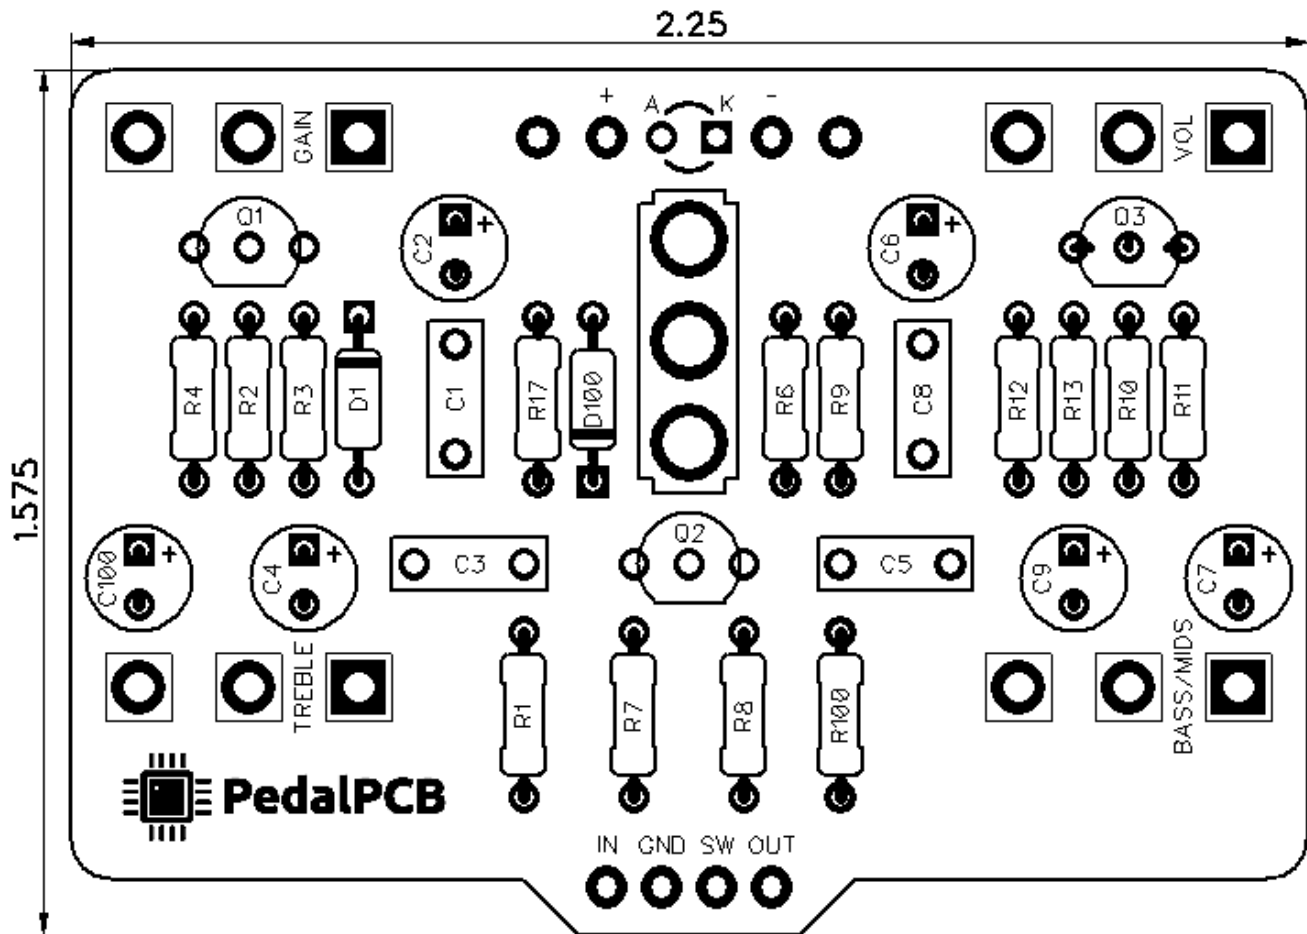

Controls

- Volume
- Gain
- Treble
- Bass/Mids
- Spark/Flame (Toggle Switch)

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

RESISTORS (1/4W)

R1 1M
 R2 120K
 R3 2K2
 R4 12K
 R6 10K
 R7 2K7
 R8 2K
 R9 330K
 R10 10K
 R11 1M
 R12 39K
 R13 10K
 R17 1K
 R100 4K7

CAPACITORS

C1 220n
 C2 22u
 C3 30n
 C4 22u
 C5 20n
 C6 4u7
 C7 2u2
 C8 1n
 C9 1u
 C100 22u

TRANSISTORS

Q1 BS170
 Q2 BS170
 Q3 2N5457

INTEGRATED CIRCUITS

IC1 TL072
 IC2 TL072

DIODES


D1 9V1
 D100 1N5817

POTENTIOMETERS

VOL A100K
 GAIN C10K
 TREBLE A100K
 BASS/MIDS B100K

SWITCHES

SW1 SPDT (ON/ON)



Provocateur Fuzz

Wiring Diagram

