
INPUT + GAIN STAGE

Gain = 1 + R3 / (R4 + RV1): about 214x with GAIN fully up

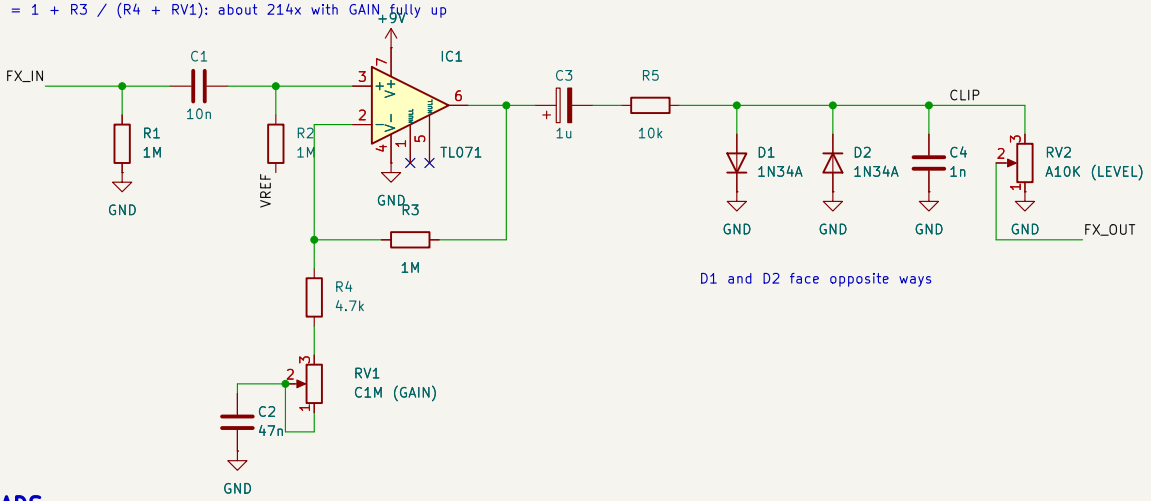


CLIPPING + LEVEL

D1 and D2 face opposite ways

OFF-BOARD WIRING (not on the PCB)

Footswitch drawn in the EFFECT ON position.


Lugs seen from underneath: 1 2 3 / 4 5 6 / 7 8 9

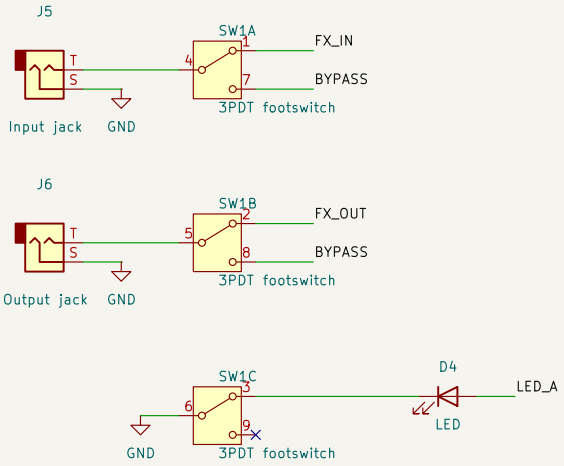


LED anode wires to pad J4 (R8 on the board limits the current).

POWER INPUT

J7: 2.1 mm center-negative. Pin 3 touches pin 2 only with no plug in, so plugging in an adapter disconnects the battery.




BOARD PADS



POWER

9 V DC only. VREF is about 4.5 V (half the supply).

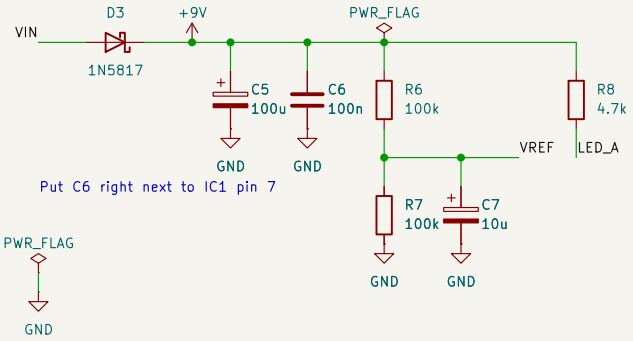

Put C6 right next to IC1 pin 7

Part refs match docs/build-guide.md (GAIN = RV1, LEVEL = RV2)
Op-amp gain stage + germanium diode clipping
github.com/maui-i/diy-distortion-pedal

Sheet: /		
File: diy-distortion-pedal.kicad_sch		
Title: DIY Distortion Pedal (Distortion+ style)		
Size: A4	Date: 2026-10-12	**Rev: 1.0**
KiCad E.D.A. 10.0.1		Id: 1/1