

Castalia

A four-channel electrochemical sensing SoC with a five-hart RISC-V back end

Maxx Seminario

University of Nebraska–Lincoln

September 20, 2026

Where cancers are caught, and whether anyone looks

Castalia

Maxx Seminario

Target application

The chip


Analog front end

Against Mushkin and the field

From currents to a score

References

Backup

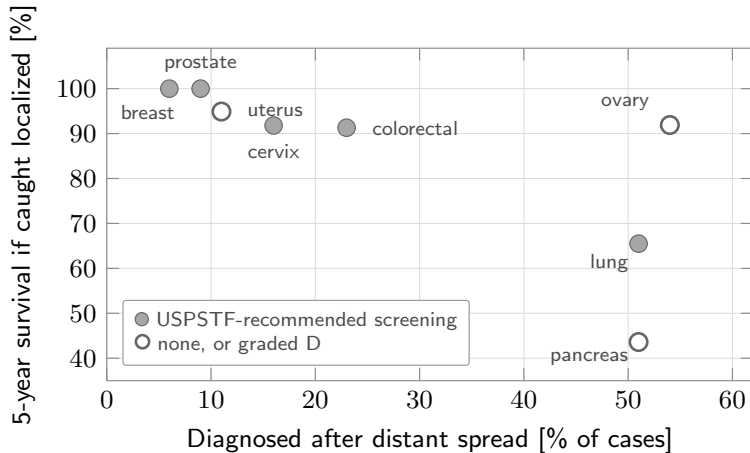

[1] SEER 21, 2016–2022; [2, 3] USPSTF

Why ovarian: late, lethal, and unscreened

Castalia

Maxx Seminario

Target application

The chip


Analogue front end

Against Mushkin and the field

From currents to a score

References

Backup

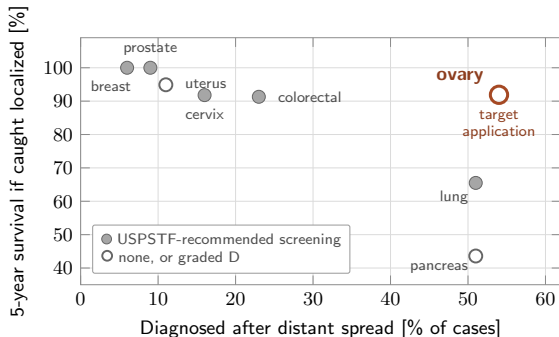

Site	Distant at dx	Deaths/100 cases	Screening (USPSTF)
Ovary	54 %	59	D
Pancreas	51 %	78	D
Lung	51 %	54	B, LDCT
Colorectal	23 %	35	A
Cervix	16 %	31	A
Uterus	11 %	21	none
Prostate	9 %	11	C, PSA
Breast	6 %	13	B

USPSTF: A/B recommended; C offered selectively; D recommended *against*; none: no statement [7].

[1] SEER, 2026 estimates; [2, 3] USPSTF

Most lethal gynecologic cancer [1]: 92 % survivable if caught localized, yet 54 % present after spread, and screening is graded D [2]. UKCTOCS moved stage, not mortality [4].

One serum aliquot, four sites, one score

Castalia

Maxx Seminario

Target application

The chip


Analog front end

Against Musklin and the field

From currents to a score

References

Backup

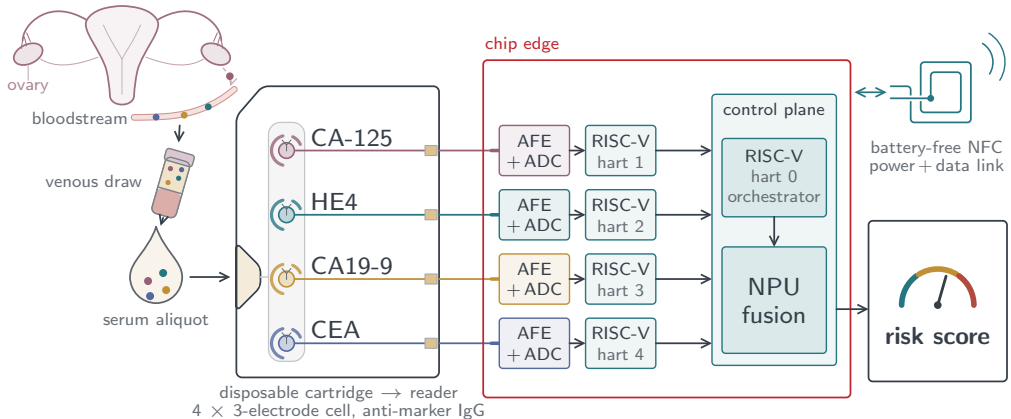

Symptomatic-patient triage on a disposable four-site cartridge; four markers read at the same instant, fused on chip.

No single marker is a test; four fused are [5]

Castalia

Maxx Seminario

Target application

The chip


Analogue front end

Against Mushkin and the field

From currents to a score

References

Backup

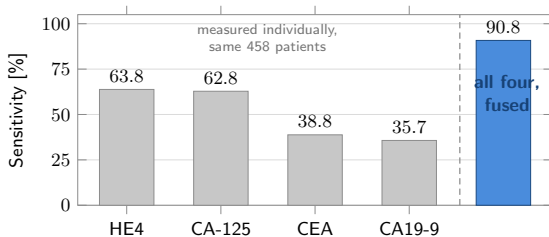

Marker	Molecule	Cut-off
CA-125	MUC16 mucin epitope [8]	35 U/mL
HE4	WFDC2 glycoprotein [6]	70 pmol/L
CA19-9	sialyl-Lewis ^a antigen	37 U/mL
CEA	CEACAM5 glycoprotein	5 ng/mL

Each marker covers a subtype the others miss. The decision is a learned combination, so the chip is four channels plus the processor that fuses them.

Four markers resolved in one differential-pulse sweep

Castalia

Maxx Seminario

Target application

The chip


Analog front end

Against Mushkin and the field

From currents to a score

References

Backup

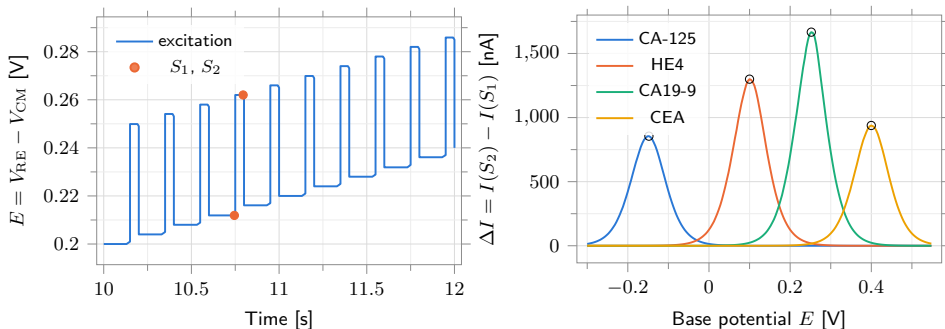

■ schematic sim, pre-layout

Peak position identifies the reporter, peak height carries concentration. Apexes within 2 mV and 1 % of the assay targets; blank below 1 pA.

Every clinical cut-off lands inside the channel window

Castalia

Maxx Seminario

Target application

The chip


Analog front end

Against Moshkin and the field

From currents to a score

References

Backup

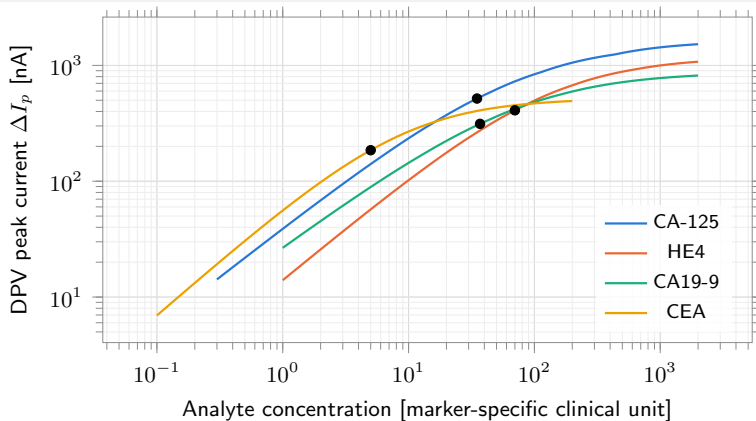

■ schematic sim,

pre-layout

CA-125 35 U/mL, HE4 70 pmol/L, CA19-9 37 U/mL, CEA 5 ng/mL: all four on the steep part of the curve at one R_f setting.

Castalia at a glance

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Moskin and the field

From current to future

References

Backup

Digital

Harts	5 (1 orchestrator, 4 channel tiles)
ISA	rv32imac_zba_zbb_zbs_zbc
Clock	24 MHz rated, closed at 25 MHz
Measured CPI	1.260 aggregate, nine benchmarks
Private TCM	8 KiB per hart, 1-cycle
Shared RAM	80 KiB behind a round-robin arbiter
Synchronisation	16 hardware mutexes, LR/SC, AMOs
Interrupts	claim/complete, any vector to any hart
Accelerator	NPU: MLP, conv-1D, XNOR, GEMM
Power domains	4 MTCMOS, one per channel tile
Debug	JTAG, RISC-V Debug Module
Field boot	NFC ISO 14443A harvested boot

Analog and physical

Measurement sites	4 identical, simultaneous
Topology	bipolar grounded-WE potentiostat
Electrode pads	12 (CE/RE/WE $\times$ 4)
Converter	10-bit SAR per channel, extracted
Reference DAC	12-bit R-2R per channel
Feedback resistor	$18\text{ k}\Omega + 6\text{ k}\Omega \cdot N$, 320 codes
Full scale	$\pm 40.7\text{ }\mu\text{A}$ to $\pm 0.41\text{ }\mu\text{A}$
EIS	firmware mode of the same channels
Analog supply	2.5 V , $v_{\text{cm}} = 1.25\text{ V}$
Process	65 nm CMOS, 1P8M, HVT cells
Die / package	$3.0 \times 3.0\text{ mm}$ / LQFP-100
Digital power	10.72 mW post-route, SS, 25 MHz

Digital numbers from the hardened flow; analog numbers schematic-level, except the SAR, which is extracted.

Block diagram

Castalia

Maxx Seminario

Target application

The chip


Analogue front end

Against Moshiin and the field

From currents to a score

References

Backup

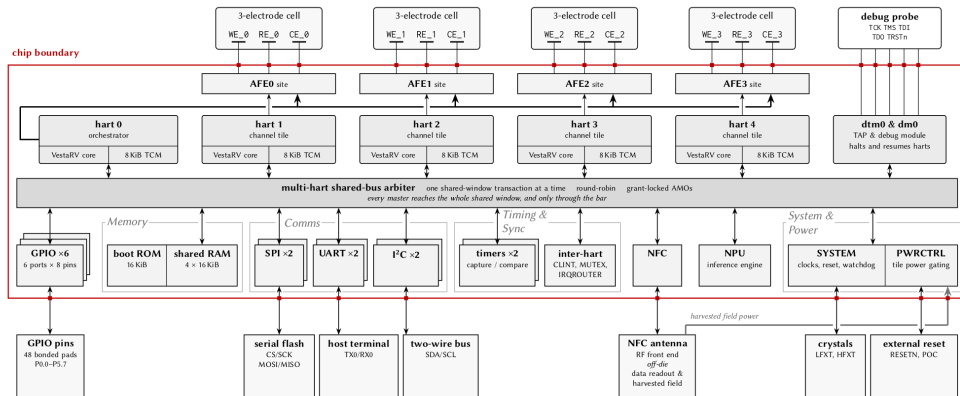

Four channel tiles own four AFE sites; every master reaches ROM, RAM, NPU and peripherals only through the arbiter.

Physical implementation

Castalia

Maxx Seminario

Target
application

The chip

Analog front end

Against Moshkin
and the field

From currents to
a score

References

Backup

**ARTWORK
PENDING**



chip top, 3.0×3.0 mm
(Virtuoso export)

**ARTWORK
PENDING**



one channel
tile (Virtuoso
export)

Process	65 nm, 1P8M, HVT
Core box	$2690 \times 2690 \mu\text{m}$
Tile	$660 \times 880 \mu\text{m}$
Tile logic	≈ 98 k NAND2-eq.
Tile SRAM	8 KiB
Package	LQFP-100, 14×14 mm

■ hardened flow, post-route

One tile hardened once, instantiated four times; the notch in each tile is the analog channel's keep-out.

Digital, as closed

Castalia

Maxx Seminario

Target
application

The chip

Analog front end

Against Meshkin
and the field

From currents to
a score

References

Backup

Whole chip, post-route

Internal	3.78 mW
Switching	2.33 mW
Leakage	4.61 mW
Total	10.72 mW

One channel tile

Total	1.761 mW
Gated	0

Measured CPI, timed kernels

Benchmark	Instr.	CPI
spmv	802 447	1.143
multiply	20 892	1.163
vvadd	2 408	1.374
median	4 015	1.398
qsort	123 205	1.398
rsort	146 548	1.412
dhrystone	200 523	1.504
towers	3 747	1.682
memcpy	11 017	1.726
Aggregate	1 314 802	1.260

Timing at 25 MHz

reg2reg WNS	+99 ps
Leakage share	43 %

■ hardened flow, post-route

SS 0.9 V 125 °C, statistical activity 0.2. Gating one tile removes 1.76 mW; the always-on band pays nothing.

Power gating: one switched rail per channel tile

Castalia

Maxx Seminario

Target
application

The chip



Analog front end

Against Mushkin
and the field

From currents to
a score

References

Backup

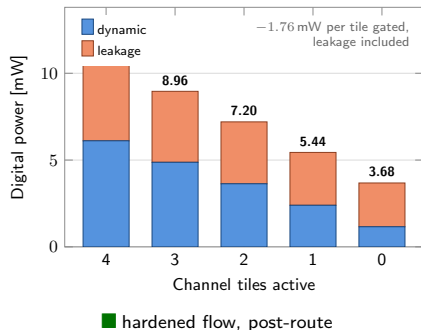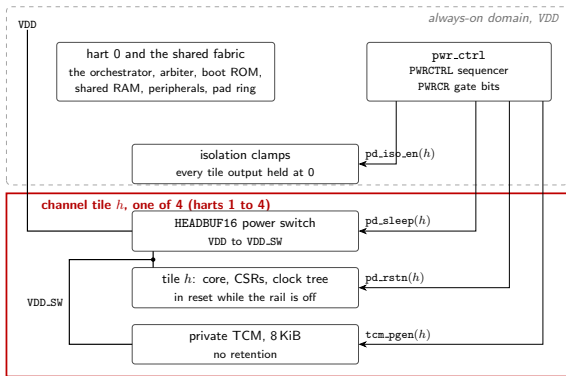

Cold gating: the header cuts the rail, so a parked tile draws neither dynamic nor leakage power. Each tile gated removes 1.76 mW; the always-on band keeps 3.68 mW.

Grounded-WE two-amplifier potentiostat

Castalia

Maxx Seminario

Target application

The chip


Analog front end

Against Meshkin and the field

From currents to a score

References

Backup

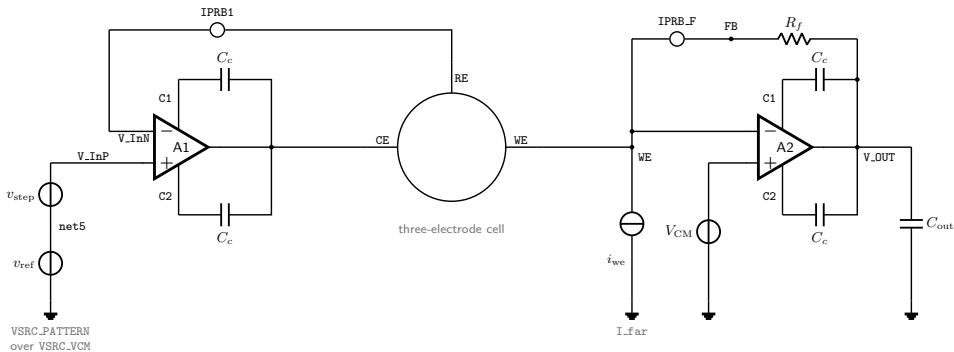

A1 drives CE with RE in feedback; A2 holds WE at v_{cm} through R_f . $v_{out} = v_{cm} - I_{we}R_f$, both polarities.

Analog top level

Castalia

Maxx Seminario

Target
application

The chip

Analog front end

Against Moshkin
and the field

From currents to
a score

References

Backup

ARTWORK PENDING



Virtuoso export of the analog top level: four channels, shared bias, test bus

The class-AB amplifier: one cell, both roles

Castalia

Maxx Seminario

Target
application

The chip


Analog front end

Against Mvshkin
and the field

From currents to
a score

References

Backup

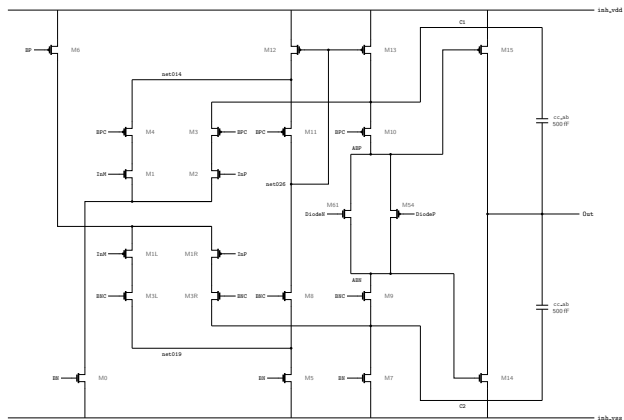

complementary
input pairs and
their cascodes

diode-connected
summing branch

class-AB
drive

output

testbench
compensation

The amplifier across corners

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Moskin and the field

From currents to a score

References

Backup

Parameter	Unit	tt	ff	fs	sf	ss	Spread
Open-loop gain A_{OL}	dB	82.77	79.88	83.14	83.37	84.94	5.06
Phase margin	°	73.52	74.70	74.04	72.86	73.34	1.84
Dominant pole $f_{-3\text{dB}}$	kHz	1.592	2.286	1.538	1.494	1.225	1.061
Gain-bandwidth product	MHz	22.781	23.187	22.894	22.939	22.587	0.600
Parameter	Unit	tt	ff	fs	sf	ss	Spread
Input offset voltage	mV	0.622	0.649	0.624	0.569	0.456	0.193

■ schematic sim, pre-layout

The amplifier under mismatch

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Moshkin and the field

From currents to a score

References

Backup

Parameter	Unit	N	Mean	σ	p_1	p_{99}	Worst	Spec	Yield	4 ch
Open-loop gain A_{OL}	dB	200	82.16	1.06	80.04	84.60	79.50	≥ 40.00	100.0	100.0
Phase margin	$^\circ$	200	73.62	1.42	69.80	76.21	68.93	≥ 40.00	100.0	100.0
Dominant pole $f_{-3\text{dB}}$	kHz	200	1.723	0.276	1.158	2.453	–	–	–	–
Gain-bandwidth product	MHz	200	22.815	3.566	16.191	31.741	–	–	–	–

Parameter	Unit	N	Mean	σ	Mean $\pm 3\sigma$	Min	Max	Spec	Yield	4 ch
Input offset voltage	mV	200	0.583	5.201	0.583 ± 15.604	–14.130	15.709	± 1.000	12.0	0.0

■ Monte Carlo, 200 samples

Bipolar accuracy through zero

Castalia

Maxx Seminario

Target application

The chip


Analog front end

Against Moshkin and the field

From currents to a score

References

Backup

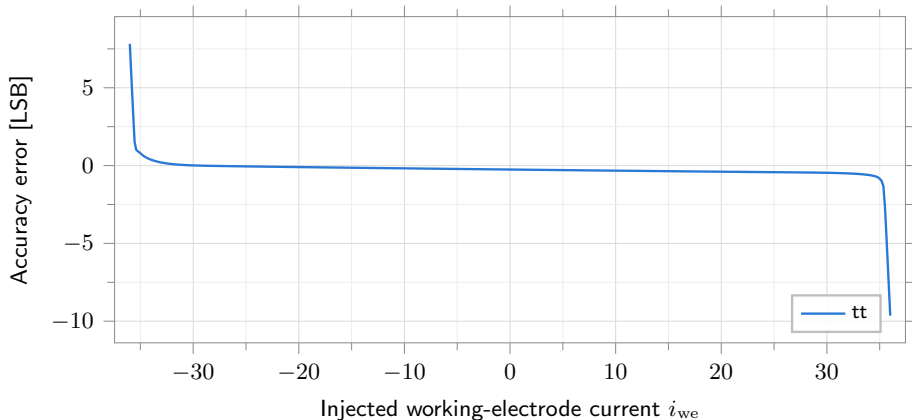

■ schematic sim, pre-layout

No kink at the crossing: class-AB output, no dead zone. This is the measurement rev-1's PMOS mirror could not make.

Cyclic voltammetry through the assembled channel

Castalia

Maxx Seminario

Target application

The chip


Analog front end

Against Mishkin and the field

From currents to a score

References

Backup

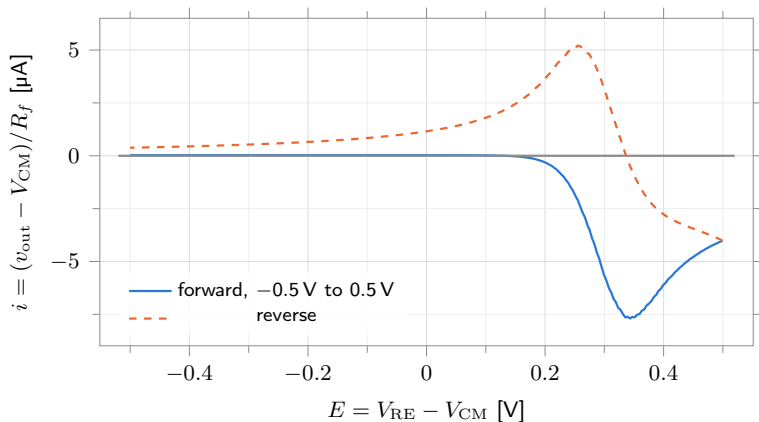

■ schematic sim,

pre-layout

Staircase potential from the on-chip DAC, current digitised by the on-chip SAR, unclipped over the sweep.

Programmable feedback resistor: one string, 320 codes

Castalia

Maxx Seminario

Target application

The chip


Analog front end

Against Mushkin and the field

From currents to a score

References

Backup

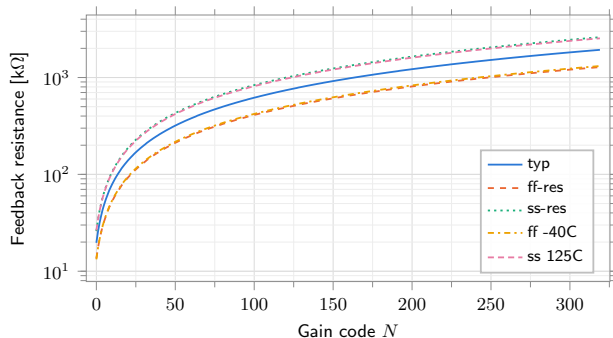

$$R_f = 18 \text{ k}\Omega + 6 \text{ k}\Omega \cdot N$$

N	R_f	Full scale
0	19.6 kΩ	$\pm 40.7 \mu\text{A}$
63	397 kΩ	$\pm 2.02 \mu\text{A}$
319	1.93 MΩ	$\pm 0.41 \mu\text{A}$
LSB at 319		0.824 nA

Strictly monotonic at every corner, including the four thermometer seams. Maximum gain is noise-limited, not quantisation-limited.

Feedback resistor across corners and under mismatch

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Moshkin and the field

From currents to a score

References

Backup

Parameter	Unit	typ
Chord resistance	k Ω	19.639
Worst deviation	mV	1.998
Worst deviation	ADC LSB	1.255
Secant- R modulation	%	0.504

Parameter	Unit	N	Mean	σ	Yield
$R(N=0)$	k Ω	200	19.650	0.071	100.0
$R(N=63)$	k Ω	200	396.4515	0.3608	100.0
$R(N=64)$	k Ω	200	403.8759	0.3644	100.0
$R(N=319)$	M Ω	200	1.93212	0.00071	100.0
Seam step 63 $\rightarrow$ 64	k Ω	200	7.424	0.504	100.0

■ schematic sim, pre-layout

■ Monte Carlo, 200 samples

10-bit SAR ADC, extracted netlist

Castalia

Maxx Seminario

Target
application

The chip


Analog front end

Against Moshkin
and the field

From currents to
a score

References

Backup

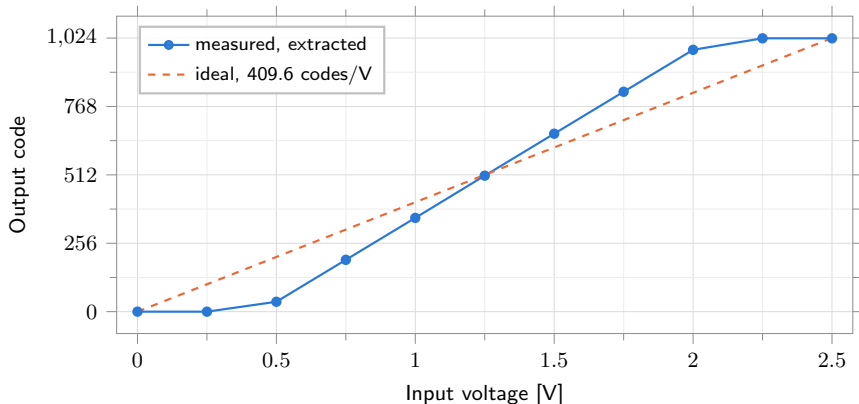

■ extracted

netlist

23 clocks per conversion, 870 kSa/s, 50 pJ. The capacitor array exists only in layout, so this is the one block characterised extracted.

SAR ADC across corners

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Moskin and the field

From currents to scores

References

Backup

Parameter	Unit	tt 37 °C	ff	fs	sf	ss
Fitted slope	codes/V	628.59	628.59	628.40	628.73	628.13
Effective LSB	mV	1.5909	1.5909	1.5914	1.5905	1.5920
Input at code 0	V	0.4408	0.4408	0.4407	0.4408	0.4399
Usable span	V	1.6274	1.6274	1.6280	1.6271	1.6286
Worst residual	LSB	0.495	0.495	0.490	0.477	0.484
RMS residual	LSB	0.294	0.294	0.277	0.288	0.302
Monotonic points		20/20	20/20	20/20	20/20	20/20
Conversion period	μs	1.150	1.150	1.150	1.150	1.150
Analog supply current	μA	6.360	4.787	5.453	8.437	15.429
Total power	μW	18.09	16.77	15.77	23.74	43.06
Energy per conversion	pJ	20.8	19.3	18.1	27.3	49.5

■ extracted netlist

Reference DAC across corners and under mismatch

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Moskin and the field

From currents to a score

References

Backup

Parameter	Unit	tt	ff	fs	sf	ss	Spread
Zero-scale output	μV	0.02	0.25	0.01	0.06	0.00	0.25
Full-scale output	V	2.499388	2.499388	2.499388	2.499388	2.499388	0.000000
LSB size	μV	610.351	610.351	610.351	610.351	610.351	0.000
INL, most positive	LSB	0.113	0.101	0.100	0.127	0.130	0.030
INL, most negative	LSB	-0.376	-0.338	-0.390	-0.362	-0.414	0.076
INL, worst magnitude	LSB	0.376	0.338	0.390	0.362	0.414	0.076
DNL, most positive	LSB	0.002	0.001	0.002	0.002	0.002	0.000
DNL, most negative	LSB	-0.423	-0.374	-0.424	-0.424	-0.479	0.105
DNL, worst magnitude	LSB	0.423	0.374	0.424	0.424	0.479	0.105


Parameter	Unit	N	Mean	σ	Median	p_1	p_{99}	Worst	Spec	Yield	4 ch
INL worst	LSB	200	1.485	0.620	1.364	0.426	3.287	3.393	≤ 1.000	20.5	0.2
INL max	LSB	200	1.154	0.610	1.031	0.194	2.886	-	-	-	-
INL min	LSB	200	-1.485	0.620	-1.364	-3.287	-0.426	-	-	-	-
DNL min	LSB	200	-1.682	1.415	-1.287	-6.161	-0.058	-6.499	≥ -1.000	42.0	3.1
DNL max	LSB	200	1.123	1.128	0.713	0.007	4.760	-	-	-	-
DNL worst	LSB	200	2.249	1.314	1.847	0.441	6.161	6.499	≤ 0.750	9.0	0.0

■ schematic sim, pre-layout ■ Monte Carlo, 200 samples

How impedance is measured: the same loop, no extra hardware

Castalia

Maxx Seminario

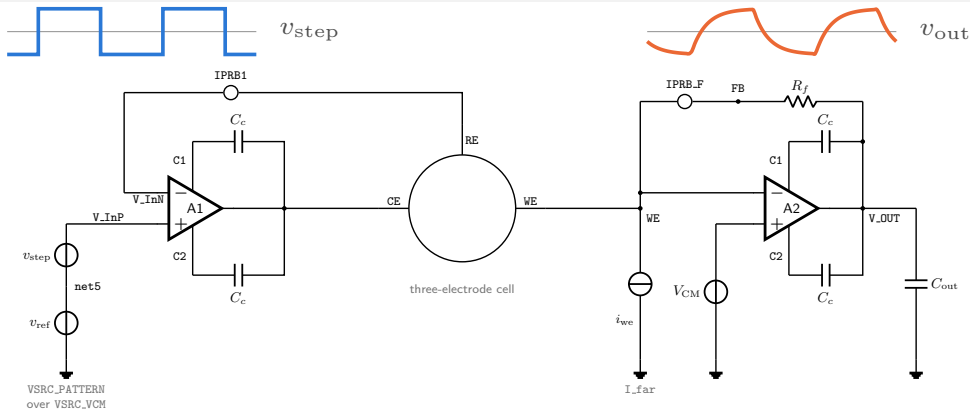

Excite	v_{step} toggles between two DAC codes, ± 4 or ± 10 mV about the DC setpoint v_{ref}
Sense	v_P at RE; $i_{\text{WE}} = -v_{\text{out}}/R_f$ through the same R_f a DC measurement uses
Digitise	one SAR, the two records interleaved; firmware I/Q multiply-accumulate over M periods
Solve	$\hat{Z} = -R_f \hat{V}_P / \hat{V}_{\text{OUT}}$, or a ratio to a known Z_{cal} , where R_f , the LSB and the square's $4/\pi$ cancel

The mode adds a clock divider and an accumulate to the channel, nothing else.

Impedance spectroscopy on the same channel

Castalia

Maxx Seminario

Target application

The chip



Analog front end

Against Moshkin and the field

From currents to a score

References

Backup

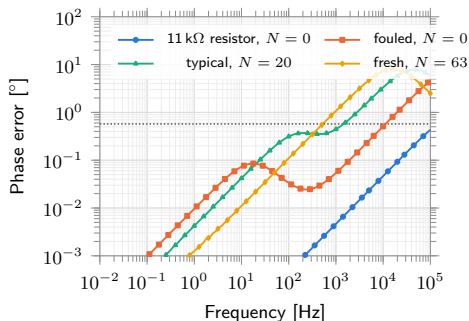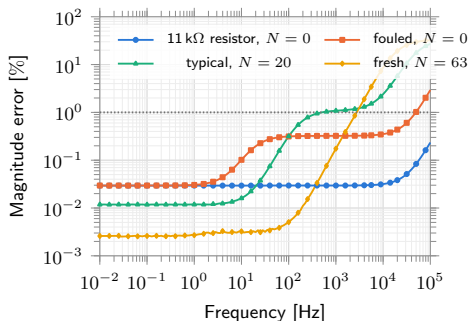

Excitation	Demodulation	Accuracy	$ Z $ range
2-code DAC square	firmware, channel hart	$\pm 1\%$, $\pm 0.6^\circ$ to 5.05 kHz; $\pm 5\%$ to 26.5 kHz	246 Ω – 12.1 M Ω

■ schematic sim, pre-layout

No EIS engine. Impedance is a ratio of two readings through one converter; the DAC drops out of the accuracy budget.

One AFE channel, as simulated

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Moskin and the field

From currents to voltage

References

Backup

Parameter	Value	Condition
CE compliance	13.2 mV – 2.480 V	2.5 V rail, corners
Cell current delivered	$\pm 52.5 \mu\text{A}$	12 k Ω cell
TIA compliance	$\pm 0.80 \text{ V}$ about v_{cm}	
Feedback resistor	19.6 k Ω – 1.93 M Ω , 320 codes	monotonic at every corner
Full-scale current	$\pm 40.7 \mu\text{A}$ ($N=0$) to $\pm 0.41 \mu\text{A}$ ($N=319$)	SAR window $\cap$ TIA compliance
Current quantum	0.824 nA at maximum gain	below the 2 nA noise budget
Bipolar accuracy	0.25–0.38 LSB worst	560 k Ω , 1 M Ω electrode, corners
Control-loop PM	79–80°	five corners, into a cell
TIA-loop PM	89–93°	12-cell electrode grid
Input current noise	341 pA standalone, 3.6–21 nA into an electrode	0.1–100 Hz, 560 k Ω
Zero-current offset	$\sigma(v_{\text{re}}) = 5.72 \text{ mV}$, gain-independent	200 MC samples, calibratable
Quiescent current	197–250 μA per channel	amplifiers + local bias

■ schematic sim, pre-layout ■ Monte Carlo, 200 samples

Pre-layout, electrode held nominal: no row includes electrode-to-electrode spread.

Against the field: the ISCAS'26 table, plus Castalia

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Myshkin and the field

From currents to a score

References

Backup

Parameter	Myshkin [9]	Castalia	Chen '19 [10]	Ghoreishizadeh '17 [11]	Lin '23 [12]
Modality	CA/CV	CA/CV/DPV/EIS	CA/CV	CA/CV	CV/EIS
Channels	1	4, simultaneous	–	–	–
Current direction	source only	bipolar	±	±	±
Sensitivity (pA)	56.5*	341 [†]	41	0.47	1.7
$I_{\max}$ (μA)	+20	±40.7	±5	±20	–48/+16
Power (mW)	3.0 [‡]	15.3 [§]	0.016	9.3	1.0
Process (nm)	65	65	180	350	180
Die (mm ²)	1.5	9.0	–	–	–
On-chip DSP	VestaRV, 1 hart	VestaRV, 5 harts	No	No	No
On-chip ML	NPU, 1 mode	NPU, 4 modes	No	No	No

* AFE; ADC quantisation limits Myshkin to 153 pA. [†] Input-referred rms, 0.1–100 Hz, maximum gain, ideal R_f , no electrode; LSB 0.82 nA. [‡] Measured: 2.8 mW digital at 24 MHz + 258 μW AFE. [§] Pre-silicon: 10.72 mW digital post-route at SS, 125 °C, 25 MHz + 4 × 1.14 mW AFE, schematic. – not tabulated in [9].

Still the only entries with a processor and an ML engine on the die; Castalia adds concurrency, both current polarities and EIS.

Myshkin to Castalia: what the digital side gained

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Against Myshkin and the field

From currents to a score

References

Backup

	Myshkin (Nov. 2025)	Castalia
	Harts	1
	ISA	rv32imc
	Shared memory	single master, no arbiter
	Synchronisation	–
	Interrupts	83 vectors, one hart
	Traps	legacy mechanism
	Debug	none
	Power management	memory-block off, CPU sleep
	Field power	–
	NPU	1 mode (MLP)
	Peripherals added	–
	Performance	not characterised
	AFE and converter	1 site, source only; dual-slope + SAR
	Die / package	1.5 × 1.0 mm, QFN-44
	Generation	hand-maintained
		5: orchestrator + 4 hardened channel tiles
		rv32imac + Zba, Zbb, Zbs, Zbc; misa
		80 KiB window, round-robin arbiter, coherent atomics
		16 hardware mutexes, CLINT, LR/SC and AMOs
		124 vectors, claim/complete, any vector to any hart
		standard M-mode CSRs, mtrapctl, recoverable illegal instruction
		JTAG DTM + RISC-V Debug Module, halt groups
		+ 4 MTCMOS tile domains, PWRCTRL sequencer, PGOOD boot gate
		NFC ISO 14443A tag engine, harvested boot
		4 modes: MLP, conv-1D, XNOR-popcount, GEMM; 16 KiB staging
		QSPI, I3C, DMA, TRNG, PWM, RTC, 1-Wire, I2C target, event fabric
		measured CPI 1.260 over nine benchmarks
		4 sites, bipolar; one SAR and one DAC per site; EIS in firmware
		3.0 × 3.0 mm, LQFP-100
		one JSON configuration: RTL, headers, linker, pad ring, TRM

Same core, same process, same 24 MHz rating. Everything above the core is new.

The fusion runs on the NPU

Castalia

Maxx Seminario

Target
application

The chip

Analog front end

Against Moshkin
and the field

From currents to
a score

References

Backup

$$s = \sigma \left(\sum_{k=1}^4 w_k \hat{c}_k + b \right)$$

Input	peak current, peak potential, baseline $\times 4$
Mode	0, dense layer, one sigmoid
Output	one risk score
Weights	trained off-chip, staged by firmware

Per site

Hart	1, ownership enforced in hardware
Potential	own 12-bit DAC
Converter	own 10-bit SAR
Power	own MTCMOS domain

The logistic form of the cleared two-marker algorithm, extended to four inputs and moved from the central laboratory onto the electrode.

References (1/2)

Castalia

Maxx Seminario

Target
application

The drug

Analys front end
Against Moshkin
and the field

From currents to
a score

References

Backup

- [1] NCI, *SEER Cancer Stat Facts*, per-site pages, seer.cancer.gov/statfacts, accessed 20 Sep. 2026. Stage, survival: SEER 21, 2016–22; cases, deaths: 2026 est.
- [2] D. C. Grossman *et al.*, “Screening for ovarian cancer: USPSTF recommendation statement,” *JAMA* 319:588, 2018.
- [3] USPSTF, *A and B Recommendations; Prostate Cancer: Screening*, 2018; *Pancreatic Cancer: Screening*, 2019. uspreventiveservicestaskforce.org.
- [4] U. Menon *et al.*, “Ovarian cancer population screening and mortality after long-term follow-up in UKCTOCS,” *Lancet* 397:2182, 2021.
- [5] F. Chen *et al.*, “Clinical analysis of four serum tumor markers in 458 patients with ovarian tumors: combined use of HE4, CA125, CA19-9, and CEA,” *Cancer Manag. Res.* 10:1313, 2018.
- [6] R. G. Moore *et al.*, “A novel multiple marker bioassay utilizing HE4 and CA125 for the prediction of ovarian cancer in patients with a pelvic mass,” *Gynecol. Oncol.* 112:40, 2009.

References (2/2)

Castalia

Maxx Seminario

Target
application

The chip

Analogue front end

Against Moshihi
and the field

From currents to
a score

References

Backup

- [7] USPSTF, *Grade Definitions* (current, after July 2012), uspreventiveservicestaskforce.org, accessed 20 Sep. 2026.
- [8] P. Charkhchi *et al.*, "CA125 and ovarian cancer: a comprehensive review," *Cancers* 12:3730, 2020.
- [9] M. A. Seminario, S. McRobert, A. Uerling, P. Aberson, S. Balkır, J. A. Schmitz and E. J. Markvicka, "An electrochemical sensing SoC for autonomous wound monitoring," *IEEE ISCAS*, 2026.
- [10] Y.-C. Chen, S.-Y. Lu and Y.-T. Liao, "A microwatt dual-mode electrochemical sensing current readout with current-reducer ramp waveform generation," *IEEE TBioCAS* 13(6):1163, 2019.
- [11] S. S. Ghoreishizadeh *et al.*, "A differential electrochemical readout ASIC with heterogeneous integration of bio-nano sensors for amperometric sensing," *IEEE TBioCAS* 11(5):1148, 2017.
- [12] Y.-J. Lin *et al.*, "A multimodality electrochemical and impedance spectroscopy system-on-a-chip with temperature sensing and impedance-boosting techniques," *IEEE TBioCAS* 17(4):857, 2023.

Backup: USPSTF screening grades

Castalia

Maxx Seminario

Target
application

The dip

Analog front end

Against Moshkin
and the field

From currents to
a score

References

Backup

Grade	Certainty of net benefit	Definition [7]	Cancer screening [2, 3]
A	high, substantial	Recommends the service. Offer or provide it.	cervix (2018), colorectal 50–75 (2021)
B	high moderate, or moderate	Recommends the service. Offer or provide it.	breast 40–74 (2024), lung LDCT 50–80 (2021), colorectal 45–49 (2021) prostate PSA 55–69 (2018)
C	at least moderate, small	Offer selectively, by professional judgment and patient preference.	
D	no net benefit, or harms outweigh	Recommends <i>against</i> the service. Discourage its use.	ovary (2018) , pancreas (2019)
I	cannot be determined	Evidence insufficient, poor, or conflicting.	—
none	—	No USPSTF statement exists for the condition.	uterus

Ovarian D is a verdict on a test that was tried, CA-125 plus transvaginal ultrasound [2, 4], not on the absence of one.